



KeyShot 8 Manual

1. KeyShot 8 Manual	7
1.1 KeyShot 8 Online Manual	8
1.1.1 What Is KeyShot?	10
1.1.2 What's New	11
1.1.2.1 Feature Highlights	13
1.1.2.2 Additional Features	22
1.1.2.3 Product Updates	23
1.1.2.4 KeyShot Library Updates	24
1.1.2.5 User Interface Updates	27
1.1.2.6 Release Notes	28
1.1.2.6.1 KeyShot 8.0 Release Notes	29
1.1.2.6.2 Limitations & Known Issues	30
1.1.3 Getting Started	35
1.1.4 Installation	40
1.1.4.1 Migration Assistant	41
1.1.4.2 Resource Folder	43
1.1.4.3 Pro Floating Installation	46
1.1.4.3.1 Pro Floating Quick Start Setup	47
1.1.4.3.2 Luxion License Server Installation	50
1.1.4.3.3 License Server Installation (Linux)	54
1.1.4.3.4 KeyShot Pro Floating Installation	59
1.1.4.3.5 Pro Floating Troubleshooting	68
1.1.4.3.6 Pro Floating Advanced Setup	76
1.1.4.3.7 Floating License Definitions	94
1.1.4.4 Silent Install (PC)	95
1.1.5 User Interface	96
1.1.5.1 Real-time View	97
1.1.5.2 Main Menu	99
1.1.5.3 Toolbar	104
1.1.5.4 Ribbon	105
1.1.5.5 Workspaces	107
1.1.5.6 Library Window	108
1.1.5.6.1 Materials Tab	109
1.1.5.6.2 Colors Tab	110
1.1.5.6.3 Environments Tab	111
1.1.5.6.4 Textures Tab	112
1.1.5.6.5 Backplates Tab	113
1.1.5.6.6 Favorites Tab	114
1.1.5.7 Project Window	115
1.1.5.7.1 Scene Tab	116
1.1.5.7.2 Material Tab	119
1.1.5.7.3 Environment Tab	121
1.1.5.7.4 Lighting Tab	122
1.1.5.7.5 Camera Tab	125
1.1.5.7.6 Image Tab	128
1.1.5.8 Animation Timeline	130
1.1.5.9 Geometry View Window	133
1.1.5.10 Material Template Window	135
1.1.5.11 Welcome Window	136
1.1.5.12 Hotkeys	137
1.1.5.13 Multi-touch	139
1.1.5.14 Tessellation Settings Window	140

1.1.6 Working With Models	141
1.1.6.1 Supported File Formats	142
1.1.6.2 Import Dialog	143
1.1.6.3 KeyShot Plugins	146
1.1.6.3.1 LiveLinking	148
1.1.6.4 Scene Units	149
1.1.6.5 Scene Tree	151
1.1.6.6 Hiding And Showing Parts	153
1.1.6.7 Regrouping Parts	154
1.1.6.8 Moving Models and Parts	157
1.1.6.9 Duplicating Models	159
1.1.6.10 Pattern Tool	162
1.1.6.11 Rounded Edges	165
1.1.6.12 Re-Tessellate	166
1.1.6.13 Revision Manager	167
1.1.6.14 Geometry View	171
1.1.6.14.1 Geometry View Settings	172
1.1.6.14.2 Display Style	173
1.1.6.14.3 Camera Type	176
1.1.6.14.4 Standard Views	178
1.1.6.14.5 Geometry Editor	179
1.1.6.15 Model Sets	183
1.1.6.16 Export	186
1.1.7 Materials	188
1.1.7.1 Material Library	189
1.1.7.1.1 Polygon Textured Materials	191
1.1.7.2 Assigning Materials	194
1.1.7.3 Editing Materials	195
1.1.7.4 Copying Materials	196
1.1.7.5 Saving Materials	197
1.1.7.6 In-Project Library	198
1.1.7.7 General Parameters	201
1.1.7.7.1 Diffuse Parameter	202
1.1.7.7.2 Specular Parameter	203
1.1.7.7.3 Refractive Index	204
1.1.7.7.4 Roughness Parameter	206
1.1.7.8 Material Types	208
1.1.7.8.1 Diffuse	209
1.1.7.8.2 Flat	210
1.1.7.8.3 Glass	211
1.1.7.8.4 Glass (Solid)	212
1.1.7.8.5 Liquid	213
1.1.7.8.6 Metal	215
1.1.7.8.7 Paint	217
1.1.7.8.8 Plastic	218
1.1.7.8.9 Thin Film	219
1.1.7.8.10 Translucent	220
1.1.7.8.11 Advanced	221
1.1.7.8.12 Anisotropic	224
1.1.7.8.13 Dielectric	227
1.1.7.8.14 Gem	229
1.1.7.8.15 Measured	230

1.1.7.8.16 Metallic Paint	231
1.1.7.8.17 Multi-Layer Optics	234
1.1.7.8.18 Plastic (Cloudy)	236
1.1.7.8.19 Plastic (Transparent)	237
1.1.7.8.20 Scattering Medium	240
1.1.7.8.21 Translucent (Advanced)	242
1.1.7.8.22 Velvet	244
1.1.7.8.23 Light Sources	245
1.1.7.8.24 Cutaway	265
1.1.7.8.25 Emissive	267
1.1.7.8.26 Ground	268
1.1.7.8.27 Toon	269
1.1.7.8.28 Wireframe	272
1.1.7.8.29 Axalta Paint	273
1.1.7.8.30 Xray	274
1.1.7.9 Color Library	275
1.1.7.10 Color Picker	278
1.1.7.11 Material Graph	281
1.1.7.11.1 Material Graph User Interface	283
1.1.7.11.2 Material Graph Nodes	286
1.1.7.12 Multi-Materials	316
1.1.7.13 Material Templates	319
1.1.8 Textures	322
1.1.8.1 Texture Library	323
1.1.8.2 Texture Types	326
1.1.8.2.1 Texture Map	327
1.1.8.2.2 Tiled UV	328
1.1.8.2.3 Tri-Planar	331
1.1.8.2.4 Video Map	336
1.1.8.2.5 Brushed	339
1.1.8.2.6 Mesh	340
1.1.8.2.7 Weave	342
1.1.8.2.8 Brushed (Radial)	343
1.1.8.2.9 Camouflage	344
1.1.8.2.10 Cellular	345
1.1.8.2.11 Color Gradient	346
1.1.8.2.12 Curvature	347
1.1.8.2.13 Granite	348
1.1.8.2.14 Leather	349
1.1.8.2.15 Marble	350
1.1.8.2.16 Noise (Fractal)	351
1.1.8.2.17 Noise (Texture)	352
1.1.8.2.18 Occlusion	353
1.1.8.2.19 Scratches	354
1.1.8.2.20 Spots	355
1.1.8.2.21 Vertex Color	356
1.1.8.2.22 Volume Map	357
1.1.8.2.23 Wood	358
1.1.8.2.24 Wood (Advanced)	359
1.1.8.3 Map Types	361
1.1.8.4 Mapping Types	365
1.1.8.5 Move Texture	367

1.1.9 Labels	370
1.1.10 Environments	373
1.1.10.1 Adding Environments	374
1.1.10.2 Adjusting Environments	375
1.1.10.3 HDRI Editor	377
1.1.10.3.1 HDRI Editor Pins	378
1.1.10.3.2 HDRI Editor Background	381
1.1.10.3.3 Adjusting Legacy (KeyShot 6 and earlier) HDRI Environments	385
1.1.11 Lighting	386
1.1.11.1 Custom Lighting Preset	389
1.1.12 Cameras	391
1.1.12.1 Navigating Your Scene	393
1.1.12.2 Camera List	395
1.1.12.3 Position and Orientation	396
1.1.12.3.1 Walkthrough Mode	399
1.1.12.4 Lens Settings	401
1.1.12.4.1 Perspective	402
1.1.12.4.2 Orthographic	404
1.1.12.4.3 Shift	405
1.1.12.4.4 Panoramic	406
1.1.12.5 Stereo (VR)	408
1.1.12.6 Depth of Field	409
1.1.13 Image	410
1.1.13.1 Resolution	412
1.1.13.2 Image Styles	413
1.1.13.2.1 Basic Image Style	414
1.1.13.2.2 Photographic Image Style	416
1.1.14 Studios	419
1.1.14.1 Viewset to Studio Conversion	421
1.1.15 Render	423
1.1.15.1 Render Output	424
1.1.15.1.1 Still Image Output	425
1.1.15.1.2 Animation Output	428
1.1.15.1.3 KeyShotXR Output	430
1.1.15.1.4 Configurator Output	434
1.1.15.1.5 Layers and Passes	436
1.1.15.2 Render Options	458
1.1.15.3 Render Queue	468
1.1.15.4 Render Output Window (image editor)	471
1.1.15.5 Region Rendering	472
1.1.16 Scripting	473
1.1.16.1 Script Location	474
1.1.16.2 Creating A Script	475
1.1.16.3 Script Examples	476
1.1.17 Animation	479
1.1.17.1 Animation Types	481
1.1.17.1.1 Part Animations	483
1.1.17.1.2 Material Animations	487
1.1.17.1.3 Camera Animations	489
1.1.17.2 Animation Wizard	497
1.1.17.3 Working with Animations	499
1.1.17.4 Deformation Animations	502

1.1.17.5 Animation Effects	503
1.1.17.5.1 Motion Blur	504
1.1.17.5.2 Motion Ease	505
1.1.18 KeyShotXR	507
1.1.18.1 KeyShotXR Wizard	509
1.1.18.2 KeyShotXR Animation	515
1.1.18.3 KeyShotXR Variables	516
1.1.18.4 Embedding KeyShotXR	526
1.1.18.4.1 Embedding a KeyShotXR in iBooks	527
1.1.18.4.2 Embedding a KeyShotXR in PowerPoint	530
1.1.18.4.3 Embedding a KeyShotXR in Wordpress	532
1.1.19 Configurator	534
1.1.20 KeyShot Viewer	548
1.1.21 Virtual Reality	554
1.1.21.1 VR Overview	556
1.1.21.2 Render VR Images	559
1.1.21.3 Work In Real-Time VR	560
1.1.22 KeyShot Cloud	562
1.1.22.1 KeyShot Cloud User Interface	564
1.1.22.2 KeyShot Cloud Account	567
1.1.22.3 KeyShot Cloud Search	568
1.1.22.4 Uploading/Downloading Resources	571
1.1.22.5 KeyShot Cloud Release Notes	573
1.1.23 Network Rendering	574
1.1.24 Preferences	575
1.1.24.1 Interface Preferences	576
1.1.24.2 General Preferences	579
1.1.24.3 Folders Preferences	582
1.1.24.4 Plugins Preferences	583
1.1.24.5 Color Management	585
1.1.24.6 Hotkeys Preferences	586
1.1.25 End-User License Agreement	588

KeyShot 8 Manual

Search this documentation

Topics

- [featured](#)
- [installation](#)
- [overview](#)
- [folders](#)
- [licensing](#)
- [preferences](#)
- [registration](#)
- [resources](#)
- [transferring](#)


Popular

Featured Pages

- [Geometry Node types](#)
- [Hotkeys](#)
- [Image Styles](#)
- [Installation](#)
- [Liquid](#)
- [Scattering Medium](#)
- [What's New](#)

Recently Updated Pages

-  [Utility Node Types](#)
4 minutes ago • updated by [Lisbeth Wallaert](#) • [view change](#)
-  [Geometry Node types](#)
31 minutes ago • updated by [Lisbeth Wallaert](#) • [view change](#)
-  [Tessellation Settings Window](#)
about 2 hours ago • updated by [Lisbeth Wallaert](#) • [view change](#)
-  [KeyShot 8 Manual](#)
Oct 11, 2018 • updated by [Lisbeth Wallaert](#) • [view change](#)
-  [Feature Highlights](#)
Oct 11, 2018 • updated by [Lisbeth Wallaert](#) • [view change](#)

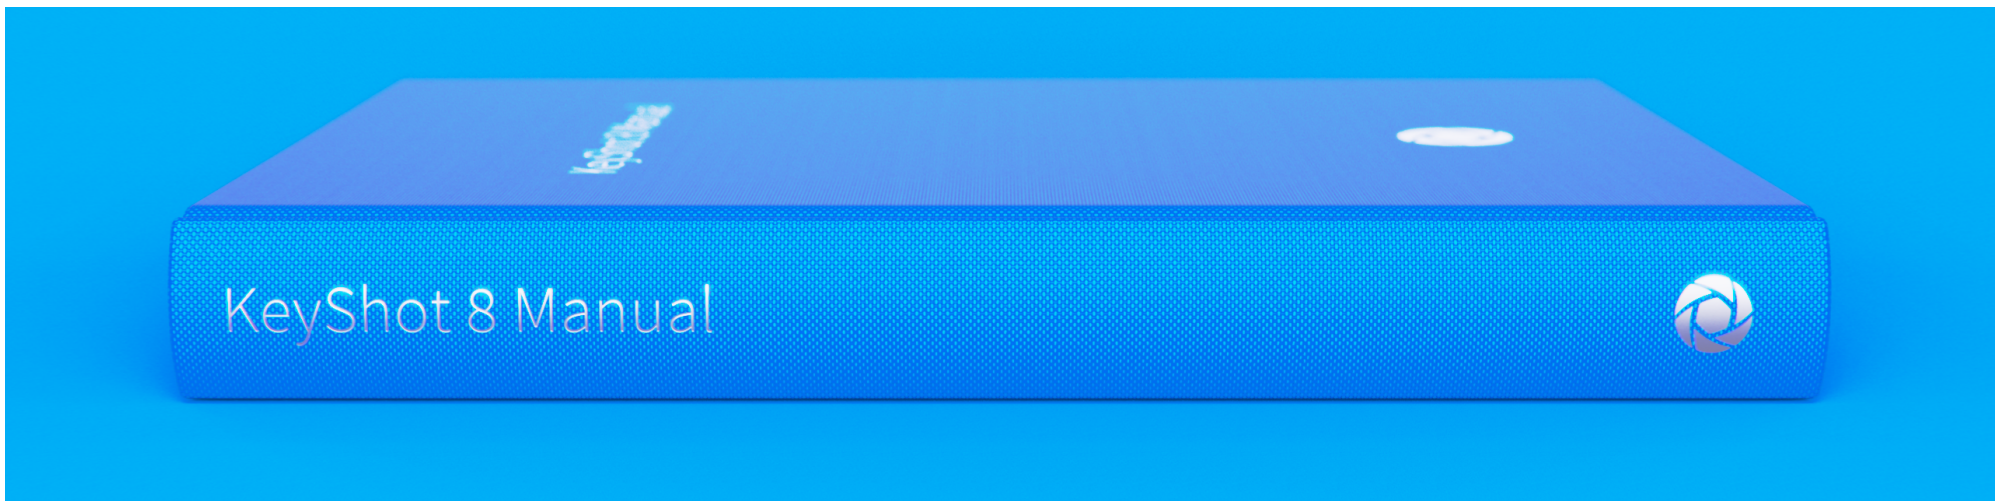

Manual Topics

- [What Is KeyShot?](#)
- [What's New](#)
- [Getting Started](#)
- [Installation](#)

Featured Pages

- [Geometry Node types](#)
- [Hotkeys](#)
- [Image Styles](#)

Other Manuals

- [KeyShot 8 Manual \(PDF\)](#)
- [KeyShot 8 Network Rendering Manual](#)

- [User Interface](#)
- [Working With Models](#)
- [Materials](#)
- [Textures](#)
- [Labels](#)
- [Environments](#)
- [Lighting](#)
- [Cameras](#)
- [Image](#)
- [Studios](#)
- [Render](#)
- [Scripting](#)
- [Animation](#)
- [KeyShotXR](#)
- [Configurator](#)
- [KeyShot Viewer](#)
- [Virtual Reality](#)
- [KeyShot Cloud](#)
- [Network Rendering](#)
- [Preferences](#)
- [End-User License Agreement](#)

- [Installation](#)
- [Liquid](#)
- [Scattering Medium](#)
- [What's New](#)

[KeyShot Plugins](#)

Other Resources

[KeyShot Quick Tips](#)

[KeyShot Tutorials](#)

What Is KeyShot?



KeyShot is a stand-alone, real-time ray tracing and global illumination program used to create 3D renderings, animations and interactive visuals. With its CPU-based architecture, photorealistic real-time rendering can be achieved on both Mac and PC, even on laptops, without the need for high-end graphics cards.

KeyShot supports more 3D file formats than any other rendering software, importing over 25 different file types. It has a simple user interface with drag-n-drop material and environment presets, interactive labeling, texture mapping, physical lighting, animation and much more.

KeyShot is...

Fast

Everything inside KeyShot happens in real-time. KeyShot uses unique rendering technology which makes it possible to see all changes to materials, lighting, and cameras instantly.

Easy

You don't have to be a rendering expert to create photorealistic images of your 3D models. Simply import your data, assign materials by dragging and dropping them onto the model, adjust the lighting, and move the camera. Done.

Accurate

KeyShot is the most accurate rendering solution for your 3D data. KeyShot is built on Luxion's internally developed, physically correct render engine based on research in the areas of scientifically accurate material representation and global illumination.

What's New

KeyShot 8 is focused on delivering a tighter workflow inside KeyShot with an emphasis on flow and less on work. KeyShot 8 requires less switching between other apps, giving you more time to create. KeyShot 8 provides the advanced features and flexibility to boost your workflow, enhance your visuals, elevate your experience, and extend your reach.

Explore Feature Highlights

Boost Your Workflow

Bring your custom assets into KeyShot 8 faster with the Migration Assistant. Control all aspects of your Studio setup. Find and apply KeyShot Cloud resources from within KeyShot. Move faster through your workflow with tighter menus, more visible resources, and improved scene tree filtering.

Elevate Your Visuals

KeyShot 8 presents new ways to display and manipulate light, materials, and texture. Control lighting better with spotlights and IES light axis selection. Use cutaways to view assemblies in new ways. Add scattering volumes to scenes as quickly as any material. Then animate it all for unmatched realism and style.


Enhance Your Experience

KeyShot 8 introduces powerful capabilities for advanced texture and image creation. New features in the KeyShot Material Graph bring control over the very geometry itself to generate displacement or create flakes and bubbles. Create any number of Image Styles to adjust tone-mapping and control curve, color and image effects right inside KeyShot.

Extend Your Reach

The KeyShot Configurator and KeyShot Viewer offer more ways to visualize and share design variations. KeyShot 8 builds on this with new ways to generate studios and display material combinations in a touch-friendly environment. New Configurator and Presentation Mode updates, plus support for glTF/GLB output give you more ways to share and extend your reach.

In this section
• Feature Highlights • Additional Features • Product Updates • KeyShot Library Updates • User Interface Updates • Release Notes

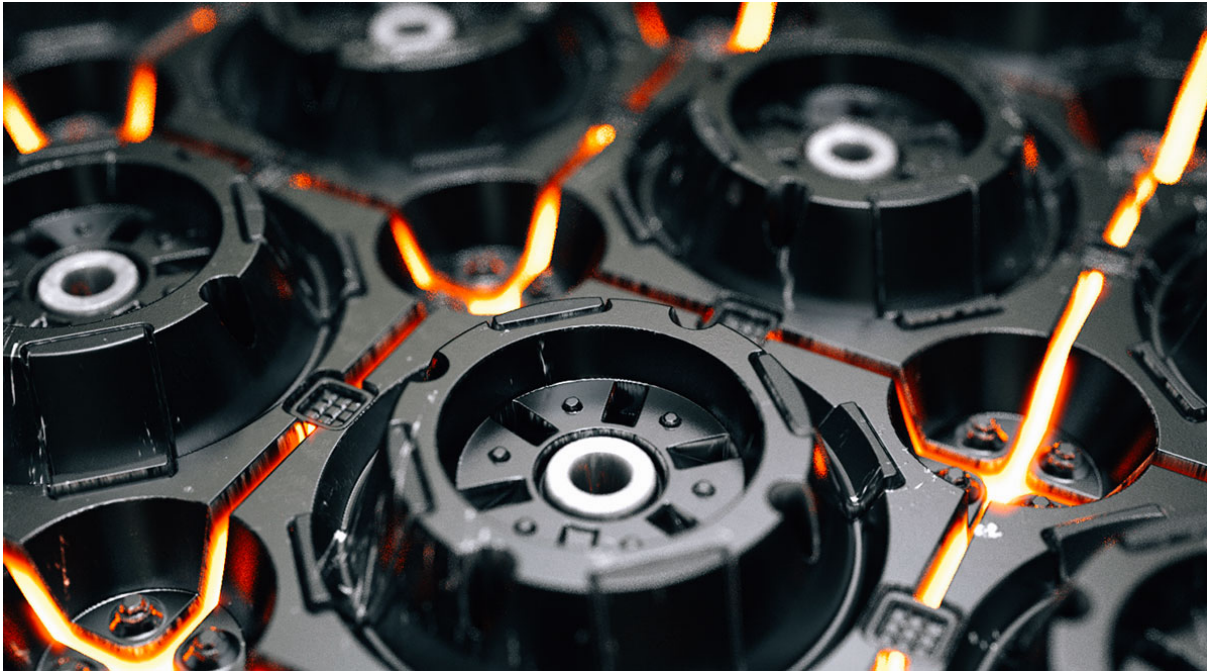

The new geometry displacement in KeyShot 8 - Rendered by John Seymour

Feature Highlights

KeyShot 8 brings usability improvements for increased workflow efficiency, new material types for more ways to visualize your products, powerful new tools that help you spend less time in other applications and more ways to share your scenes.

Feature Categories

- [Material and Volume](#)
- [Lighting and Optics](#)
- [Advanced Geometry](#)
- [Image and Output](#)
- [Collaboration](#)

Top Features

- Image Styles
- Cutaway
- Scattering Medium
- Geometry Shaders (PRO)
- KeyShot Viewer

Migration Assistant

To improve the upgrade process from KeyShot 7 to KeyShot 8 a new Migration Assistant is activated when a previous installation of KeyShot is found on the computer. The *Migration Assistant* will help you transfer your settings and resources to KeyShot 8. Learn more about the [Migration Assistant](#) in [KeyShot Installation](#).

How it Works

If you have KeyShot 7 installed, after installation of KeyShot 8, the Migration Assistant window will appear with options to migrate Settings, Resources or both. Select the preferred option and select OK, or select Cancel to bypass the migration of any settings or custom resources.

Integrated KeyShot Cloud

[KeyShot Cloud](#) now launches directly in the KeyShot user interface as a dockable window. Additionally, only resources compatible with the version of KeyShot being used are shown. With the latest release of KeyShot Cloud, there are updates that improve login, search, and download across all KeyShot versions. Learn more about all the new updates in the [KeyShot Cloud release notes](#).

How it Works

Select the KeyShot Cloud icon  from the Toolbar or select *Window, Cloud Library...* from the main menu. A new dockable window will appear. The KeyShot Cloud window may be docked to the left or right side of the KeyShot Real-time View.

Material and Volume

On this page:

- Feature Categories
- Top Features
- Migration Assistant
- Integrated KeyShot Cloud
- Material and Volume
 - Cutaway
 - Scattering Medium & VDB Support
 - Liquid Interfaces
- Lighting and Optics
 - Spotlight
 - IES Light Axis Selection
 - Multi-Layer Optics
- Advanced Geometry
 - Displace
 - Flakes
 - Bubbles
- Image and Output
 - Image Styles
 - Hex Color Codes
 - glTF/GLB Export
 - New Scripting Functions
- Collaboration
 - KeyShot Viewer
 - Studio Improvements
 - Configurator Improvements



Cutaway

The Cutaway feature in KeyShot 8 allows you to use geometry to cutaway other geometry by assigning the Cutaway material. The Cutaway material allows you to add and define the Cutaway Caps as a shaded color, the same material as the object being cut or a custom material. Learn more about Cutaway [here](#).

How it Works

Select the *Cutaway* as the option from the *Material Type* drop-down. Select the material and the object that should be used to cut.

In the Material Graph, a material node may be connected to the *Caps Material* input (try a Toon material for example). *Show Caps* needs to be checked for the material to be shown.

Show Caps is intended to be used together with fully closed surfaces (solids). Caps may show artifacts with non-closed geometry.

Caps may also show artifacts if two or more objects being cut have co-planar (touching) surfaces.

Scattering Medium & VDB Support

Scattering Medium is a new Material Type in KeyShot 8 that allows you to simulate particle scattering such as smoke and fog.

This can be useful for visualizing beams of light. Learn more about Scattering Medium [here](#).

How it Works

Select *Scattering Medium* as the material type for an object. Textures can be assigned to the *Density Texture* in the Textures tab. OpenVDB files can be loaded by selecting *Volume Map* from the *Texture* drop-down or via the Material Graph and applying the *Volume Map* to *Density Texture* on the Scattering Medium material node.

Liquid Interfaces

The approach to rendering liquids has been completely updated to support *nested dielectrics* and make rendering liquids much faster and easier. Previously, separate surfaces for the different liquid-glass and liquid-air interfaces were needed for accurate appearance. Now, separate surfaces for liquid-glass and liquid-air interfaces are no longer required. Learn more about the liquid material [here](#).

How it Works

To take advantage of the new support for nested dielectrics import your model with a single object for the liquid and a single object for the glass. The liquid should slightly overlap the glass for the best results.

Lighting and Optics



Spotlight

Spotlight is a flexible new light source Material Type that allows you to control the *Beam Angle* and assign a *Color Stencil Texture* to simulate a gobo.

How it Works

To use Spotlight, edit a material and change the type to *Spotlight*. The direction of the beam is in the -Y and can be adjusted using the Move Tool.

IES Light Axis Selection

You can now define the IES light direction based on the local axis of the object. This provides a solution that can eliminate the need to rotate light objects in a scene to achieve the desired projection direction.

How it Works

When editing the material properties of an IES light you will now see radio button selections for the different axis.

Multi-Layer Optics

This is a new Material Type for simulating high-end optics elements. It supports an arbitrary number of thin-films on top of a dispersive dielectric or metal.

How it Works

To build a Multi-Layer Optics material from scratch select *Multi-Layer Optics* from the material drop-down menu. If the original material is a dielectric based material (i.e. glass, gem, liquid) this will be set as the substrate. If it is not a dielectric based material click the add layer icon to add a Crown Glass substrate. Click the add layer button again to add thin-film layers. With a layer selected click the add button next to the Layer Material drop-down menu to change the material of the layer and populate the drop-down menu to be able to reuse it again for other layers. The folder button will allow you to import .ior files to use materials other than dielectric as thin-film layers.

Advanced Geometry

KeyShot 8 introduces an entirely new approach to working with geometry in KeyShot. Through the Material Graph, the advance material editor in KeyShot, you now have three new types of geometry nodes (shaders) to modify the geometry of an object with displacement, bubbles or flakes.



Displace (PRO)

Displace is a geometry shader that allows you to modify the polygons of an object through the use of displacement maps (textures). Displacement maps define the topology of a material similar to a bump map but instead of simulating the height of a surface it actually modifies it.

How it Works

In the Material Graph, there is a new section of nodes called *Geometry*. Add a *Displace* node and connect this to the *Geometry* input of the base material node. Assign any texture (procedural or image-based) to the node, adjust height, resolution, offset, or triangle count. A geometry node is not executed until you click the *Execute Geometry Nodes* button on the far right of the Material Graph toolbar or in the material properties window. It may take some time to execute the geometry shaders depending on the complexity. You must press the *Execute Geometry Nodes* button again for adjustments made to the Displace parameters to update.

Flakes (PRO)

Flakes is a geometry shader that modifies the polygons of an object. Flakes allow you to turn any object into a three-dimensional volume of square or spherical flakes.

How it Works

To use Flakes, add the node, select square or spherical flakes and execute. Make adjustments if desired and execute again.

The Flake node will randomly add flakes inside the volume of the geometry it is applied to. The geometry is assumed to be closed. The material of the flakes is defined by the material of the object. You will need to duplicate geometry if you want the flakes to be enclosed in an object. A texture can be used to define the density of the flakes.

Bubbles (PRO)

Bubbles is a geometry shader that modifies the polygons of an object. Bubbles will add spherical cavities within an object.

How it Works

To use Bubbles, add the node and execute. Make adjustments if desired and execute again. The bubbles node will randomly add spherical cavities inside the volume of the material of the base geometry. The geometry is assumed to be closed. A texture can be used to define the density of the bubbles.

Image and Output



Image Styles

Image Styles is a new feature that provides the ability to provide photographic adjustments to the KeyShot scene prior to or after rendering. Multiple Image Styles may be created and added to a list for a range of different styles that can be used in KeyShot Studios. The Photographic option includes adjustments for Tone-Mapping, Curve control, Color adjustments, Background color

override, and the ability to apply a Frontplate. See [Image Styles](#) for more information.

How it Works

From Project > Image tab, you can find an Image Styles list similar to Cameras and Environments. You can copy an Image Style by clicking on the first button and add a new 'Basic' style. The basic style is similar to the one used in KeyShot 7 and earlier.

The Photographic style allows for additional non-destructive manipulations of the real-time image while also applying a tone-mapping procedure which more accurately emulates how light is transferred to film-cameras and is able to provide a more photographic look. Bright colors will be desaturated and colors do not burn out the same way.

The Photographic style also allows inserting a full-frame Frontplate and overriding the background color with a solid color. This is particularly useful when in need of a pure white background when using the Photographic style.

All changes are non-destructive, i.e. settings can be changed without the render resetting to a noisy image.

Hex Color Codes

When changing colors using the RGB color space, the ability to set colors using RGB Hex codes is now possible. The hex code is a six-digit hexadecimal alpha-numeric code used in HTML, CSS, SVG, and other computing applications to quickly represent colors. Along with this, whenever a Color is applied from the KeyShot Color Library, the corresponding Hex code will appear in the Color Picker. Learn more about the Hex Color Code on the [Color Picker](#) page.

How it Works

The Hex color code can be found in the Color Picker for the RGB color space below the Red, Green, Blue sliders. To apply or change color using the Hex color code, click any *Color* property to activate the *Color Picker*. Ensure *RGB* is selected from the color space drop-down menu.

glTF/GLB Export (PRO)

This new export option provides a way to share your KeyShot scenes to other platforms. Export as GLB can then be posted to your Facebook feed or added to a PowerPoint presentation on Windows.

How it Works

The File > Export menu now has an option for GLB/GLTF. The format is selected in the native OS save dialog. Textures must be UV mapped to appear correct in the exported file. Basic materials and colors are maintained.

New Scripting Functions (PRO)

New Scripting Functions include:


- `lux.importFile()` returns a dictionary of added/updated nodes.
- `lux.renderXR()` takes `opts` argument as an instance of `lux.RenderOptions`.
- `lux.getLibraryMaterials()`, `lux.getLibraryEnvironments()`, `lux.getLibraryBackplates()`, `lux.getLibraryTextures()` have the new `filter` argument.
- `lux.getActiveEnvironment()` returns an instance of `lux.Env` that has several functions to manipulate the environment.
- `lux.getRenderLayers()` returns the list of all known render layers in the scene.
- `lux.exportFile()` makes it possible to export scenea to file.

- `lux.SceneNode.setName()`
- `lux.SceneNode.centerAndFit()`
- `lux.SceneNode.snapToGround()`

How it Works

- Get/set multiple model sets at the same time
- Support for renaming nodes via scripting
- Filtering of materials, environments, backplates, textures via scripting
- Unset node's render layer for unspecified or empty name argument
- Create/change render layer for node
- Get render layer of scene node
- Get globally defined render layers
- Scripting checks that max time and send-to-network options cannot be set simultaneously
- Get/manipulate environment: brightness, size, height, rotation, backplate, lighting environment, background color, ground shadows, occlusion ground shadows, ground reflections, flattening of ground, ground size
- Get node transform via scripting
- Fixed dark style and scripting console object name
- Yield exception if trying center-and-fit with locked active camera via scripting

Collaboration

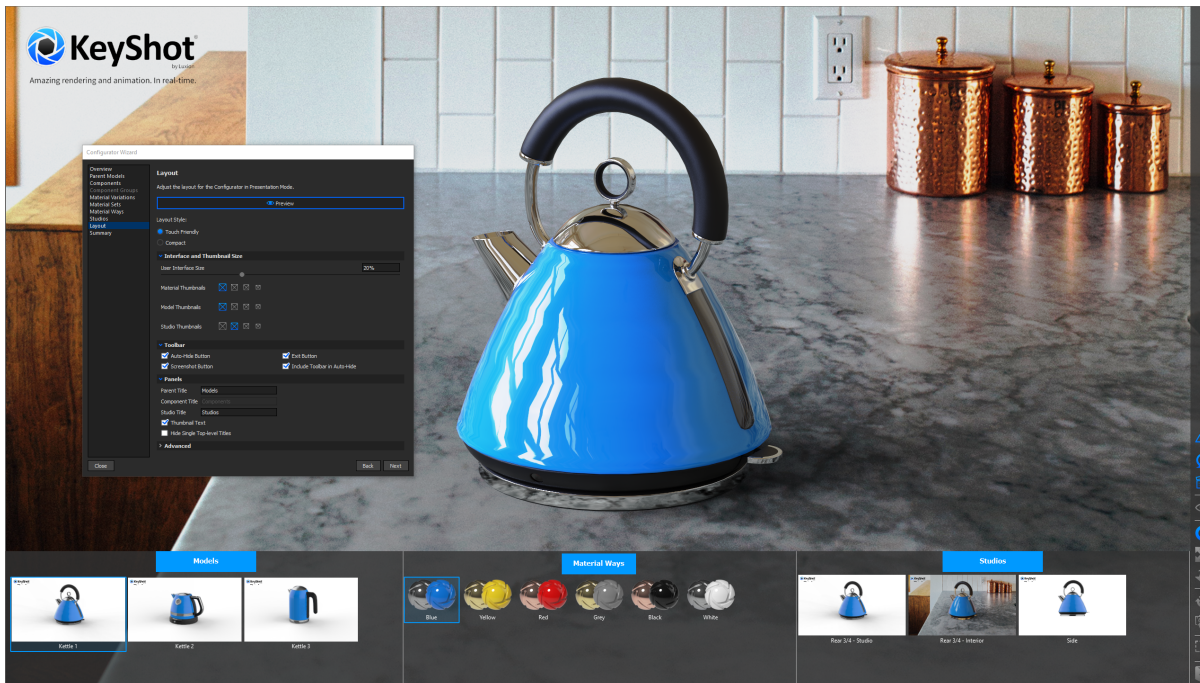

KeyShot Viewer

KeyShot Viewer is a new, feature-rich application to compliment your design review, presentations, and collaboration. With it, you can open, view and interact with a KeyShot scene in real-time using mouse, touch, pen or stylus to explore the scene or change materials and lighting. Learn more in the manual [here](#).

How it Works

After [downloading](#) and installing, KeyShot Viewer can be used to open any KeyShot Package file (.ksp) to interact with the scene. When you move the camera view or make changes the scene will update instantly. Users of KeyShot Pro can use the Configurator to include Studio, Model, and Material variations, which will be available when KeyShot Viewer is in full-screen presentation mode.

Studio Improvements **(PRO)**

Studios now come with custom thumbnails and provide the ability to re-order the Studios list by drag-and-drop. Studios also have the ability to include Image Styles. See [Studios](#) for more information.

How it Works

Select *Window, Studios...* from the main menu or hit the *U-key* to show the Studios panel. Thumbnails will now be automatically generated when a Studio is created based on what is visible in the real-time view at that time. You can re-render a thumbnail and adjust thumbnail settings in the gear icon menu. To adjust the order of Studios in the list simply drag-and-drop.

Configurator Improvements **(PRO)**

Updates include:

- Material Ways (To "sync" sub-materials across Multi-materials for concurrent changes).
- Layout page UI update.
- Presentation Mode UI update.
- Interactive Preview mode for adjusting UI.
- Studio creation included in Configurator Wizard.

How it Works

The Configurator Wizard can be accessed from the Ribbon. Learn more about KeyShot Configurator [here](#).

Additional Features

The additional features and updates are also included in KeyShot 8:

Rhino 6 Support - Direct import for Rhino 6 on Mac and Windows is now supported.

Inventor 2019 Support - Direct import of Autodesk Inventor 2019 on Windows is now supported.

Scene Tree Filtering - Filter Scene Tree by Hidden Items.

New Screenshot Preferences - Option to Include Alpha (Transparency) with PNG screenshot output. Save metadata option for *XMP* or *Simple (.meta)* output (PRO)

Bloom Threshold - Allows you to clamp bloom by pixel brightness.

Material Graph Root Node - The Material Graph now shows a root node where the Surface material (base material), Label Materials and Geometry Nodes will be connected to. Scenes from KeyShot 7 and earlier will automatically reflect this restructuring when opened in KeyShot 8.

Product Updates

With KeyShot 8, we have the following product updates:

KeyShot Cloud Re-integration

With KeyShot 8, KeyShot Cloud has been re-integrated back into the KeyShot user interface as a dockable window. In addition, login is no longer required to browse and download KeyShot resources. See [KeyShot Cloud Release Notes](#) for more information on new features and improvements.

On this page
• KeyShot Cloud Re-integration

KeyShot Library Updates

Below is a summary of changes made to the KeyShot 8 Library. All new additions to the Library can be found in the KeyShot 8 Favorites folder.

New Materials

- **Cutaway**
 - Cutaway Basic Red Caps.mtl
 - Cutaway Cross-Hatching Lines Caps.mtl
 - Cutaway Hatching Double Lines Caps.mtl
 - Cutaway Hatching Lines Caps.mtl
 - Cutaway Inherit Caps.mtl
 - Cutaway No Caps.mtl
 - Cutaway Paint Gloss Red Caps.mtl
- **Light**
 - **Advanced**
 - **Flakes**
 - Area Light Fireflies Blue Flakes Sphere.mtl
 - Area Light Fireflies Green Flakes Sphere.mtl
 - Area Light Fireflies Red Flakes Sphere.mtl
 - Emissive Fireflies Blue Flakes Sphere.mtl
 - Emissive Fireflies Green Flakes Sphere.mtl
 - Emissive Fireflies Red Flakes Sphere.mtl
 - **Spotlight**
 - **Basic**
 - Spotlight 120 degrees 1200 Lumen Neutral.mtl
 - Spotlight 120 degrees 6000 Lumen Neutral.mtl
 - Spotlight 15 degrees 1200 Lumen Neutral.mtl
 - Spotlight 15 degrees 6000 Lumen Neutral.mtl
 - Spotlight 30 degrees 1200 Lumen Neutral.mtl
 - Spotlight 30 degrees 6000 Lumen Neutral.mtl
 - Spotlight 45 degrees 1200 Lumen Neutral.mtl
 - Spotlight 45 degrees 6000 Lumen Neutral.mtl
 - Spotlight 60 degrees 1200 Lumen Neutral.mtl
 - Spotlight 60 degrees 6000 Lumen Neutral.mtl
 - Spotlight 90 degrees 1200 Lumen Neutral.mtl
 - Spotlight 90 degrees 6000 Lumen Neutral.mtl
 - **Textured**
 - Spotlight 60 degrees 1200 Lumen Cellular.mtl
 - Spotlight 60 degrees 1200 Lumen Color Gradient.mtl
 - Spotlight 60 degrees 1200 Lumen Fractal Noise.mtl
 - Spotlight 60 degrees 1200 Lumen KeyShot Icon Color.mtl
 - Spotlight 60 degrees 1200 Lumen KeyShot Icon White.mtl
 - Spotlight 60 degrees 1200 Lumen Mesh Hexagon.mtl
 - Spotlight 60 degrees 1200 Lumen Mesh Lines.mtl
 - Spotlight 60 degrees 1200 Lumen Mesh Square.mtl
 - Spotlight 60 degrees 1200 Lumen Rings.mtl
- **Liquids**
 - **Basic**

On this page

- [New Materials](#)
- [New Backplates](#)

- Cloudy Blue Lagoon Cocktail.mtl
- Cloudy Energy Drink Lime.mtl
- Cloudy Mango Juice.mtl
- Cloudy Orange Soda.mtl
- Cloudy Tomato Juice.mtl
- Liquid Cola.mtl
- Liquid KeyShot Render Juice.mtl
- **Bubbles**
 - Cloudy Energy Drink Lime Bubbles.mtl
 - Cloudy Mango Juice Bubbles.mtl
 - Cloudy Orange Soda Bubbles.mtl
 - Cloudy Tomato Juice Bubbles.mtl
 - Liquid Beer Bubbles.mtl
 - Liquid Cola Bubbles.mtl
 - Liquid Water Bubbles.mtl
- **Displace**
 - Liquid Sea Water Ripples Displace.mtl
 - Liquid Water Ripples Displace.mtl
- **Metal**
 - **Aluminum**
 - **Displace**
 - Aluminum Rough Diamond Plate 01 Displace.mtl
 - Aluminum Rough Diamond Plate 02 Displace.mtl
 - **Anodized**
 - **Brushed**
 - Anodized Aluminum Brushed 90° Black.mtl
 - Anodized Aluminum Brushed Black.mtl
 - **Polished**
 - Anodized Aluminum Polished Black.mtl
 - **Rough**
 - Anodized Aluminum Rough Black.mtl
 - **Precious**
 - **Gold**
 - **Flakes**
 - Gold 24k Polished Flakes Sphere.mtl
 - Gold 24k Polished Flakes Square.mtl
 - **Stainless Steel**
 - Stainless Steel Polished.mtl
 - Stainless Steel Rough.mtl
 - **Steel**
 - **Displace**
 - Steel Rough 10mm Circular Mesh Displace.mtl
 - Steel Rough 10mm Hexagonal Mesh Displace.mtl
 - Steel Rough Diamond Plate 01 Displace.mtl
 - Steel Rough Diamond Plate 02 Displace.mtl
 - **Miscellaneous**
 - **Flakes**
 - Plastic Cloudy Shiny Red Flakes Sphere.mtl
 - Soap Bubble Flakes Sphere.mtl
 - **Multi-Layer Optics**
 - Anti-Reflex 500 nm.mtl

Dielectric mirror.mtl

- **Plastic**

- **Packaging**

- Plastic PET Shiny Blue 3mm.mtl

- Plastic PET Shiny Green 3mm.mtl

- Plastic PET Shiny White 3mm.mtl

- **Displace**

- Plastic Expanded Polystyrene Displace.mtl

- Translucent Expanded Polystyrene Displace.mtl

- **Rubber**

- Silicone Rubber White.mtl

- **Bubbles**

- Silicone Rubber White Bubbles.mtl

- **Scattering Medium**

- **Foam**

- Scattering Medium Open-Cell Foam Large Thick Grey.mtl

- Scattering Medium Open-Cell Foam Large Thin Grey.mtl

- Scattering Medium Open-Cell Foam Small Thick Grey.mtl

- Scattering Medium Open-Cell Foam Small Thin Grey.mtl

- Scattering Medium Sponge.mtl

- **Fog**

- Scattering Medium Fog Basic.mtl

- Scattering Medium Fog Textured.mtl

- **OpenVDB**

- Scattering Medium VDB Cloud Blue 100mm.mtl

- Scattering Medium VDB Cloud Pink 100mm.mtl

- Scattering Medium VDB Cloud White 100mm.mtl

New Backplates

- **Frontplates**

- KeyShot-Logo-Frontplate-Black-4k.png

- KeyShot-Logo-Frontplate-White-4k.png

- KeyShot-Logo-Watermark-Frontplate-Black-4k.png

- KeyShot-Logo-Watermark-Frontplate-White-4k.png

- **Backplates**

- Concrete Wall 1 - Rawpixel 16x9.jpg

- Concrete Wall 1 - Rawpixel 1x1.jpg

- Concrete Wall 2 - Rawpixel 16x9.jpg

- Concrete Wall 2 - Rawpixel 1x1.jpg

- Corridor 3 - Phil Desforges 16x9.jpg

- Corridor 3 - Phil Desforges 1x1.jpg

- Kitchen Counter - Charles Deluvio - 16x9.jpg

- Kitchen Counter - Charles Deluvio - 1x1.jpg

- Wood Table - Andrej Lisakov 16x9.jpg

- Wood Table - Andrej Lisakov 1x1.jpg

User Interface Updates

The KeyShot 8 user interface has been vastly improved to be more consistent and responsive.

Updates and improvements include the following:

- Icons have been added to context (right-click) menus
- Icons have been added to Texture/Label properties flip, repeat, two-sided and sync
- New icon for Render Region
- Render Region numeric size can be set directly from the Real-time View
- Library thumbnail names remain visible at smaller sizes
- Multi-material thumbnails are displayed with a label in Material Library and In-project Library
- Model Set thumbnails adapt to panel size
- Thumbnails have been added to Studios panel
- Image Styles have been added to Studios panel
- Undo/Redo list have been added to *Main Menu*, *Edit*, *Undo/Redo*
- Preferences dialog layout has been rearranged - *Advanced* tab settings added to *Interface* and *General* as applicable
- Clear Cache option added to *Preferences*, *General*, *KeyShot Cloud*
- *Include Alpha (Transparency)* option has been added to *Preferences*, *General*, *Screenshot*
- Metadata-output format selection has been added to *Preferences*, *General*, *Screenshot*.
- Hex color input is now available in *Color Picker* for RGB color space
- In Render Output Window, *Image Styles Panel* replaces *Effects Panel*

Release Notes

The following pages contain updates on the major releases for KeyShot 8. For an overview of major features, please see the [Feature Highlights](#).

In this section
- KeyShot 8.0 Release Notes - Limitations & Known Issues

Noteworthy KeyShot 8.0 Bug Fixes

- Fixed issue with locked orthographic cameras showing a stretched image.
- Fixed issue with emissive/area light visibility settings being respected by render output with alpha.
- Fixed issues with emissive/area light visibility settings being respected by render passes.
- Fixed issue with ground shadow visibility after saving with them disabled.
- Fixed issue that caused artifacts with a Threadripper CPU.
- Fixed issue with hot pixels caused by anisotropic materials in Product Mode.
- Fixed crash when updating geometry with deleted parts.
- Fixed negative pin brightness.
- Fixed issue with empty groups in .wire imports.
- Fixed discrepancy of Translucent Advanced between Interior Mode and Product Mode.
- Fixed issue with unlocking parts when the parent group is locked.
- Fixed issues with resolution/aspect ratio not being respected properly.
- Fixed fade animation in Interior Mode.
- Fixed shared folders in color library.
- Fixed visibility toggle for certain files.

Noteworthy KeyShot Network Rendering 8.0 Bug Fixes

- Fixed pausing slave via slave tray on Windows.
- Fixed "use all cores on sign out".

KeyShot 8.0 Release Notes

The following is a summary of new features and known issues for KeyShot 8.0.

Version: 8.0

Release Date: 10/02/2018

New Features

See [KeyShot 8 What's New - Feature Highlights](#)

Known Issues

See [Limitation & Known Issues](#)

On this page

- [New Features](#)
- [Known Issues](#)

Limitations & Known Issues

On this page you will find known issues and limitations that the development team is aware of, along with workarounds where applicable.

Rendering

Feature	Issue
Interior mode	Banding can occur on still-images in Interior Mode, when rendered with Network Rendering. ▼ Details and possible solution Region mismatches (brighter/darker) can happen when using Interior Mode for Network Rendering, especially for lower resolutions. Possible solution: Try to increase the resolution of the image.
	The Global Illumination sampling for Interior Mode has been improved for KeyShot 8 and may cause scenes to be brighter than KeyShot 7.
	Interior Mode does not support material samples.
Caustics	Caustics have a different appearance in the Real-Time View and rendered output. ▼ Details and possible solution The Real-Time View uses a slightly different approach from the Output window when rendering, this is especially apparent when dealing with caustics with Interior Mode. Possible solution: Try to increase the amount of samples.
	Caustics work inherently with volumes (e.g. scattering media), however, caustics will only be applied to light sources outside the volume and this is only supported in in interior mode.
Render Passes	Passes with Interior Mode are missing Specular Reflections of Light Source materials.
	Depth Pass has artifacts when rendering is stopped before finishing with Interior Mode.
	Opacity textures produce noise in Clown render pass in Product Mode.
	Opacity textures produce noise in Diffuse pass in Product Mode.
	Opacity textures are not supported by Shadow render pass in Product Mode.
	Opacity textures are not supported by Lighting render pass in Product Mode.
	Opacity textures are not supported by Depth render pass in Product Mode.
	Opacity textures are not supported by Refraction render pass in Interior Mode.

On this page
• Rendering • Interior mode • Caustics • Render Passes • Settings • Materials and Textures • Cutaway • Scattering Medium • Geometry nodes • Displacement • Area Light • Multi-Layer Optics • Importers • Creo • Plugins • NX • Rhino

	Bump textures are not supported by Render passes in Product Mode
Settings	Global Illumination quality slider for Custom Control has no effect when Global Illumination Cache is disabled.

Materials and Textures

Material	Issue
Cutaway	Opacity maps on cutaway caps are not supported
	Fade Animations are not supported with cutaway materials

Co-planar surfaces may produce artifacts with inherit/material caps

▼ [Details](#)

If you have two co-planar parts where one is excluded from the cutaway and you use inherit caps or material caps. Artefacts can occur on the surface of the excluded material.

Cutaway material may interfere with shadows on the environment ground

▼ [Details and workaround](#)

If the cutaway object touches the environment ground it will cut that just as it cuts into regular parts.

Workaround: Add a groundplane (*Edit > Add Geometry > Add Ground Plane*) and exclude it from the cutaway.

When the Camera is inside the cutaway object, Color caps and Material caps are not working as intended

▼ [Details](#)

If the camera is positioned inside the cutaway object, Color caps do not show.

When using material caps all objects in the scene will be displayed with the cap material.

Cutaway with inherit caps used on transparent materials may produce artefacts.

▼ [Affected materials](#)

Following materials are affected:

- Glass (solid)
- Translucent
- Dielectric
- Gem
- Multi-Layer optics
- Plastic (Cloudy)
- Plastic (Transparent)

Excluded objects in cutaway have incorrect reflections

▼ [Details](#)

Objects excluded by cutaway show reflections of the inside of the object being cut.

Bad shadows on excluded cutaway objects


▼ [Details](#)

The shadows on excluded objects appear as if the cut objects are still visible.

Basic Glass and **Thin Film** appear as metal when applied to an excluded cutaway object - Product mode only!

▼ [Details](#)

Basic Glass and Thin Film appear as metal (no transparency) when applied to an excluded cutaway object and cause the scene to become very slow. This only occurs in Product Mode

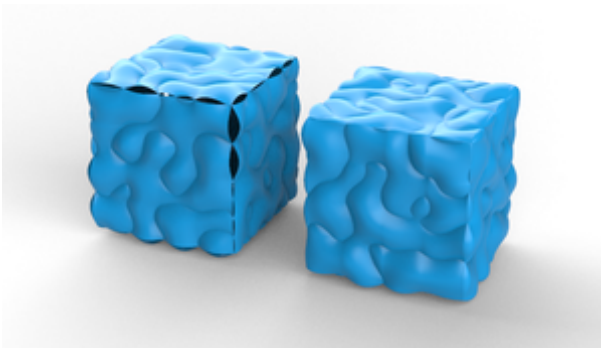	Wrong shading on Toon material when used for cutaway with inherit caps or as material caps. ▼ Details and workaround The cut will appear to have color caps instead of the desired Toon appearance. Possible workaround: Try to disable Material Contour in the Advanced settings of the Toon material.
Scattering Medium	Scattering Medium shows unusable Transmission Texture button in Texture tab.
Geometry nodes	Attaching a Curve Color Randomizer to a Geometry node causes crash. Some geometry may not show Flakes/Bubbles. ▼ Details Some CAD formats i.e. .3dm, .c4d may be imported as several triangle groups and then merged making the body unfit for Flakes/Bubbles. Workaround: Import with NURBS and Re-Tessellate. Geometry nodes don't respect disabled state.
Displacement	When applying Displacement to geometry with hard edges, these edges become split. ▼ Details  Hard model edges become split. Left cube is with hard edges, on the right the cube has a small fillet on the edges. Workaround: Applying blends in CAD usually solves the issue.
Area Light	ZSpheres transferred from ZBrush are not supported for Area Light
Multi-Layer Optics	Multi-Layer Optics do not support nested dielectrics/liquid interfaces.

Importers

from	Issue
Creo	Different units in the same model may cause issues with animation when importing into KeyShot. ▼ Details If the imported Creo assembly overall is in inches but one or more parts are in millimeters, animation on those parts might not act as expected in regards of size and position.

Plugins

from	Issue
NX	NX plugin always opens KeyShot 7 if installed. ▼ Details Workaround: Uninstall KeyShot 7, Export using NX plugin, or save scene from KeyShot 7 and open in KeyShot 8.
	NX plugin always opens new KeyShot session when clicking Update. ▼ Details Workaround: Export .bip from plugin and use Import > Update Geometry.
	NX plugin does not show progress dialog when sending to KeyShot 8.
Rhino	Rhino plugin always opens new KeyShot session when clicking Update. ▼ Details Workaround: Export .bip from plugin and use Import > Update Geometry.

Getting Started

How Easy is KeyShot?


KeyShot's drag and drop based workflow will have you rendering images in minutes. With a simple interface providing many advanced features and instant real-time feedback, you save time while focusing on your design.

Step 1: Import Your 3D Model

Launch KeyShot. Import your 3D model via *File, Import...* KeyShot supports over 20 3D file formats, including SketchUp, SolidWorks, Solid Edge, Pro/ENGINEER, PTC Creo, Rhinoceros, Maya, 3ds Max, IGES, STEP, OBJ, 3ds, Collada, and FBX. KeyShot also features many plugins with more features, including KeyShot BIP export and LiveLinking. [Learn More](#)


On this page

- [How Easy is KeyShot?](#)
- [Step 1: Import Your 3D Model](#)
- [Step 2: Assign Your Materials](#)
- [Step 3: Choose Your Environment](#)
- [Step 4: Adjust Your Camera](#)
- [Step 5: Enjoy the Perfect Image](#)

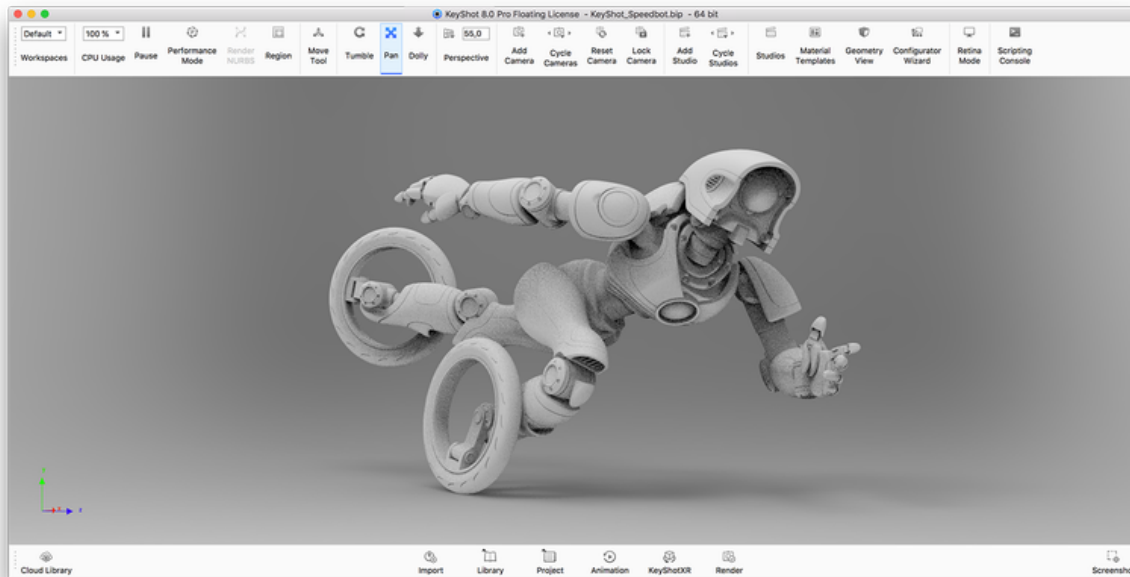


Step 2: Assign Your Materials

From the *Library* Window, select the *Materials* tab. Apply any of the 600+ scientifically accurate materials from the material library by simply dragging and dropping them onto your model in the *Real-time View*. Changes appear on your model instantly with accurate color and lighting under the current lighting conditions. [Learn More](#)

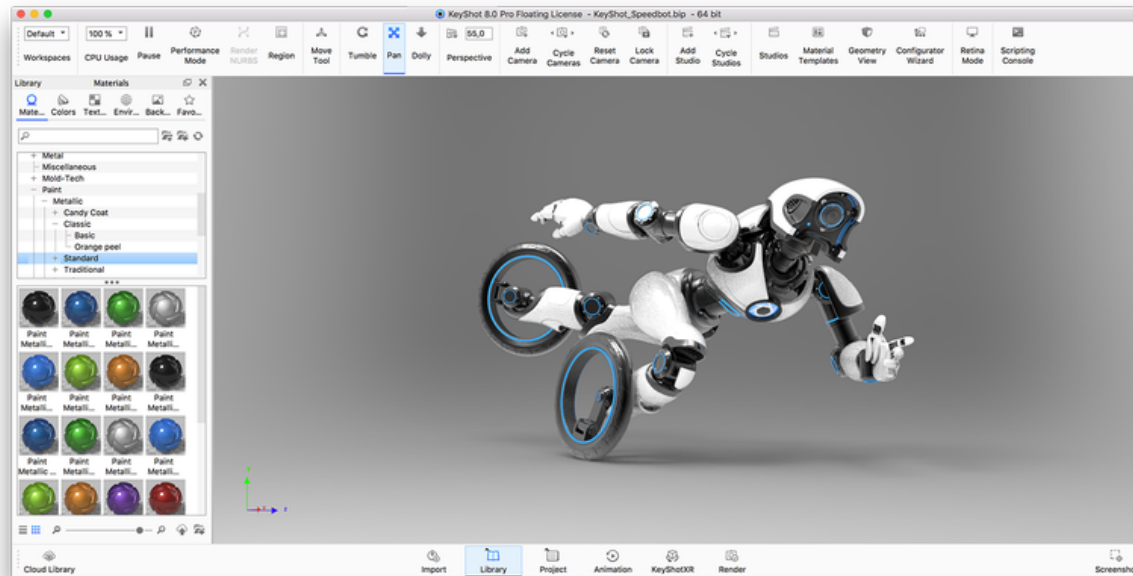


Step 3: Choose Your Environment

Now select the *Environment* tab. Drag and drop an Interior, Outdoor or Studio lighting environment (HDRI) into your scene. You will see the change in the scientifically accurate, real world lighting immediately and how it affects the appearance of your colors, materials and finishes.

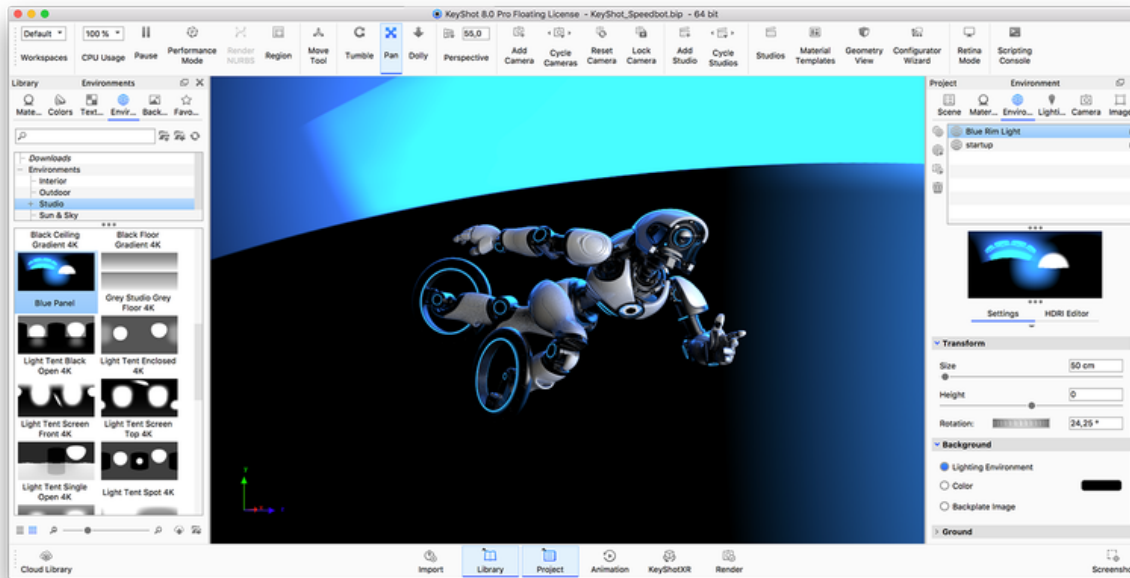

Step 4: Adjust Your Camera

Use your mouse to adjust the camera. Additional settings are available in the *Project, Camera* tab. Adjust the angle and distance, control perspective with focal length and field of view settings, and easily add depth of field to your scene. [Learn More](#)

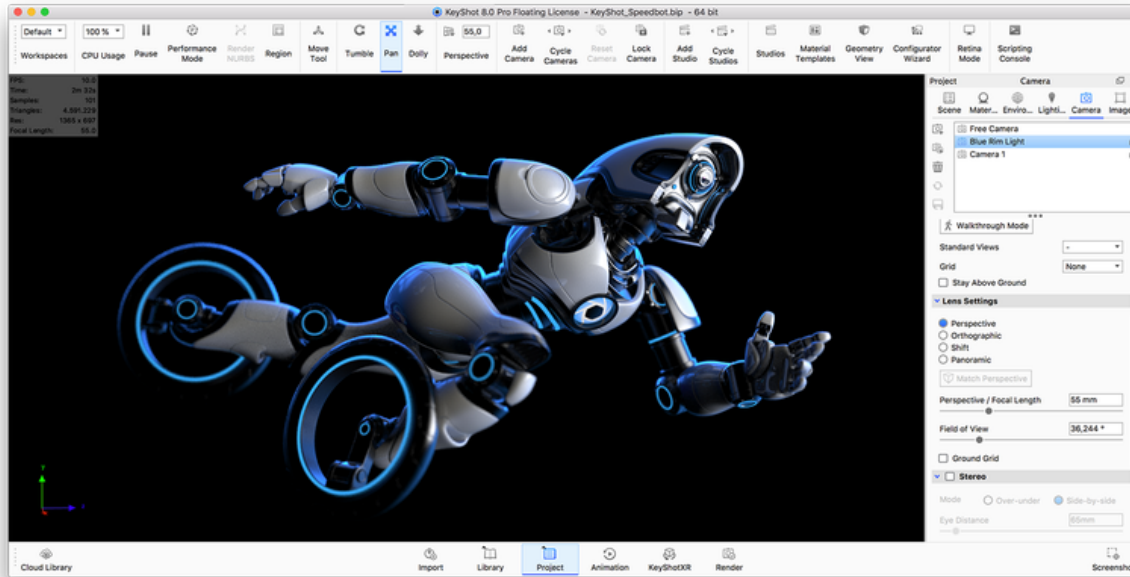

Step 5: Enjoy the Perfect Image

Hit *Render* on the main toolbar. Use the default setting or adjust the output options. Select the *Render* button to watch your image render right before your eyes. [Learn More](#)



Installation

System Requirements

Before installation, confirm that your system meets the necessary hardware and operating system requirements. You can [view the system requirements here](#).

Installing Your License

The standard node-locked license of KeyShot can only be active on one machine at a time. However, you can transfer your license repeatedly between up to three machines of mixed platforms.

Automatic Install

When you receive your *keyshot8.lic* file, save it to your computer. Next, start KeyShot, and select *Install a license file (*.lic)* and browse to the *keyshot8.lic* file. If your license fails to install, check to ensure you have full permissions set on your *KeyShot 8* resources folder.

Manual Install

When you receive your *keyshot8.lic* file, you can manually copy it to the *Keyshot 8* resources folder on PC or Mac.

Transferring Your License

During the license transfer process, an Internet connection is required. Once the license has been successfully transferred, KeyShot can run without being connected to the Internet.

How to Transfer Your License

To transfer your license, ensure you are connected to the Internet on the active machine.

1. Start KeyShot and go to *Help, Deactivate License on this Computer...*
2. Next, ensure the new machine is connected to the internet and KeyShot is installed. Start the software, fill out your information on the activation screen, and press *Next*.
3. On the following screen you will be asked for your KeyShot serial code. Type in your information and press *Next* to finalize the activation.

On this page

- [System Requirements](#)
- [Installing Your License](#)
 - [Automatic Install](#)
 - [Manual Install](#)
- [Transferring Your License](#)
 - [How to Transfer Your License](#)

Migration Assistant

If you have KeyShot 7 installed on your PC/Mac, when installing KeyShot 8 for the first time, the *Migration Assistant* will help you transfer your settings and resources to KeyShot 8. You can choose to migrate Settings, Resources or both.

Migrating Settings

Preferences

Any alterations you have made to the default *Preferences* setup will be transferred.

Workspaces

You won't have to re-create your favorite *Workspaces*.

Swatches saved in Color Picker

If you have added any color swatches to the the *Color Picker*, these will also be transferred.

License Information

- **Node Locked license:** Information about name, company etc. will be prefilled in the *Registration* dialog.
- **Floating license:** KeyShot 8 will connect to the same license server as you used in KeyShot 7. If there are no licenses for KeyShot 8 on the server all your information will be prefilled in the *Registration* dialog.

Migrating Resources

Library resources

All non-stock resources will be copied into the respective KeyShot 8 libraries. Here they will be located in the *Migrated* folder.

If you have customized the folder settings all KeyShot 8 resources will be added to your custom folders.

Material Templates


Any *Material Templates* you have created will be copied to KeyShot 8.

Scripts

All custom scripts will be copied into your scripts list where they will be located in the *Migrated* folder.

On this page

- Migrating Settings
 - Preferences
 - Workspaces
 - Swatches saved in Color Picker
 - License Information
- Migrating Resources
 - Library resources
 - Material Templates
 - Scripts

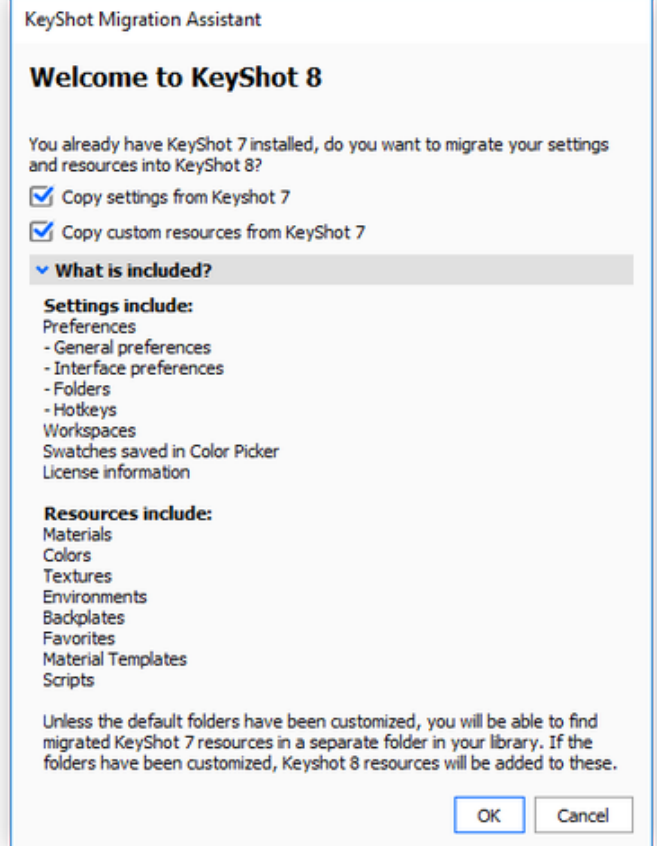

Resource Folder

KeyShot Resource Folder

Your KeyShot installation contains a folder of preset KeyShot resources (or assets). Resources such as materials, environments, and textures are stored here. When you open a .bip file, KeyShot references the KeyShot resources folder location and loads any files that apply to the scene. You can specify the location of the KeyShot resources folder under the *Folder Preferences* tab.

On Windows, you will find *Preferences* in the Main Menu under *Edit, Preferences* and on Mac in the Main Menu under *KeyShot, Preferences*.

The KeyShot resources folder contains the following sub-folders:

Animations

Animations will be saved to this folder by default. At render time, other locations can be specified in the Render Options window.

Backplates

The KeyShot Library loads backplates from the this location and saves imported backplates to this folder by default.

Colors

The KeyShot Library loads color library files from the this location and saves imported color library files to this folder by default.

Downloads

Resources downloaded from the KeyShot Cloud will be saved to this location.

Environments

The KeyShot Library loads environments from this location and saves imported environments to this folder by default.

Favorites

This folder is empty until a favorite list of resources is created. Once created, the favorite list is saved to this location as a XML file.

Materials

The KeyShot Library loads materials this location and saves imported materials to this location by default.

Material Templates

This folder is empty until a material template is created. Once created, the material template is saved to this location.

Models

On this page
• KeyShot Resource Folder • Animations • Backplates • Colors • Downloads • Environments • Favorites • Materials • Material Templates • Models • Renderings • Scenes • Scripts • Textures • PC Location • Setting Permissions • Mac Location • Setting Permissions

This folder contains standard primitives that you can import into KeyShot.

Renderings

Renderings will be saved to this folder by default. At render time, other locations can be specified inside the Render Options window.

Scenes

This folder contains sample scenes that you can only open with KeyShot. These scenes are saved as BIP files.

Scripts

This folder contains sample scripts that you can use with KeyShot.

Textures

The KeyShot Library loads textures from this location and saves imported textures to this folder by default.


PC Location

After KeyShot 8 is installed, a “KeyShot 8 Resources” shortcut will be created on your desktop. By default, this shortcut points to: *Documents/KeyShot 8*.

Setting Permissions

You must have read and write permissions for your KeyShot 8 folder in order to save renders, animations, and more. Here's how to set permissions:

- Right click the KeyShot 8 resources folder and select “Properties”.
- Go to the Security tab and highlight your group or user name.
- Click the “Edit” button.
- Set permissions to “Full Control.”
- Click “Apply” and “OK.”

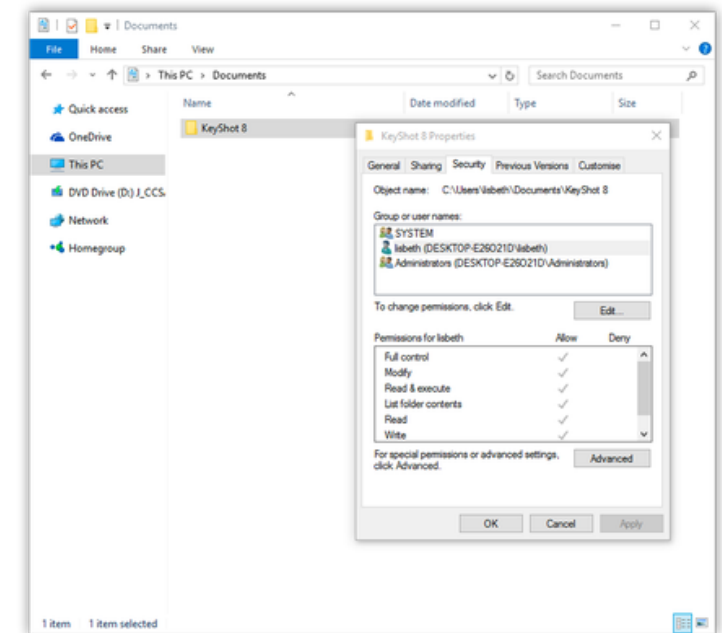


Mac Location

On a Mac, your KeyShot 8 resources folder is saved inside the “Application Support”: */Library/Application Support/KeyShot8*

Setting Permissions

You must have read and write permissions to your KeyShot 8 folder in order to save renders, animations, and more. Here's how to set permissions:


1. Right click the KeyShot 8 resources folder and select "Get Info."
2. Expand "Sharing & Permissions" and unlock access.
3. Change all privileges to "Read & Write."
4. Click the settings button and select "Apply to enclosed items..."
5. Click "OK" and close the window.

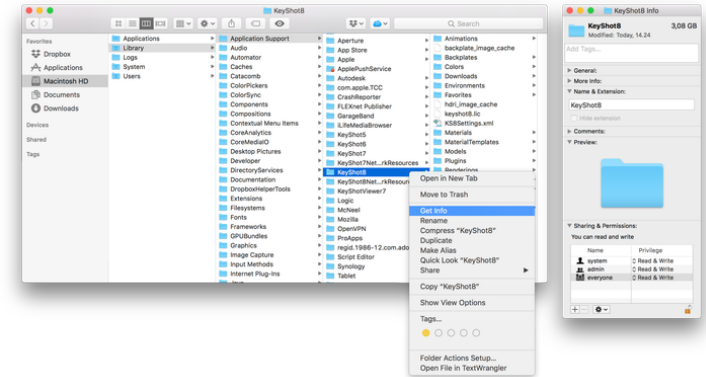

Pro Floating Installation

Welcome to the KeyShot Pro Floating Installation Guide! This guide will walk you through the installation process starting with the license management application: Luxion License Server (Windows & Mac) or Imgrd (Linux). You will then install and configure the client application: KeyShot! We have also included a list of features and add-ons, a troubleshooting guide, and licensing terminology with definitions.

Server Setup

	<i>Luxion License Server</i> Luxion License Server is the license management application for Mac and Windows Requires: Windows Server 2008 and later. Mac OS X 10.10 and later		<i>Imgrd (Linux)</i> The <i>Imgrd</i> (Unix executable file) is the license management process for Linux.
---	---	---	--

You can also visit the [Pro Floating Advanced Setup](#) pages for help with manual setup.

All license management applications utilize the latest [FlexNet licensing](#) tools by Flexera Software LLC. KeyShot Pro Floating and Luxion License Server are both provided by Luxion Inc.

Client Setup

	<i>KeyShot 8 Floating Installation</i> Amazing Rendering and Animation in real-time • Download KeyShot 8
--	---

In this section

- [Pro Floating Quick Start Setup](#)
- [Luxion License Server Installation](#)
- [License Server Installation \(Linux\)](#)
- [KeyShot Pro Floating Installation](#)
- [Pro Floating Troubleshooting](#)
- [Pro Floating Advanced Setup](#)
- [Floating License Definitions](#)

Pro Floating Quick Start Setup

KeyShot Pro Floating - Server Installation

All license management applications utilize the latest FlexNet licensing tools by Flexera Software LLC. KeyShot Pro Floating and KeyShot License Manager are both provided by Luxion Inc. Please follow the instructions below to install the license server and have your license file issued.

During license setup, you will install the server on a single computer in your network. This computer will host your license file and will be referred to as the license server. *Note: The server must be a local central server - a dedicated machine for the FlexNet server software to be installed on and powered on and connected to the network at all times.*

Before You Begin

Your KeyShot Pro Floating license will be sent via email. If you have a previous installation, please save the license file to your license server folder (e.g. *C:\FlexLM* on Windows) overwriting the previous file. If you changed the port number in the original file, please make sure your new license reflects that. It is important to note that the latest client software installation requires the latest KeyShot license server software. Without the latest license server software, KeyShot will display an "unknown error".

1. Download the license server software

[KeyShot License Server - Windows](#)

[KeyShot License Server - MacOS](#)

[KeyShot License Server - Linux](#)

2. Install the license server

1. Download and unpack the server software on the machine that will host the licenses.
2. Start the server software.
3. The server software will automatically provide the *Host Name* and the *Host ID*.
4. Send the following information to license@luxion.com.
 - Company name
 - Serial code
 - Computer Host name
 - Computer MAC Address

How to Restart a Windows Server

1. Go to the server's *C:\FlexLM* folder
2. Launch *LMTools.exe*
3. Go to the START/STOP/REREAD tab
4. Enable Force Server Shutdown
5. Click Stop Server and wait for the server to stop
6. After a minute, click Start Server

The service will restart. Client computers will be able to connect as usual.

How to Restart a Mac Server

1. Launch KeyShot License Manager.app
2. Make sure to select Install License File
3. Click Browse and browse to your new license file
4. Click Stop
5. Click Start/Restart

On this page

- [KeyShot Pro Floating - Server Installation](#)
- [KeyShot Pro Floating - Client Installation](#)

The service will restart. Client computers will be able to connect as usual.

How to Restart a Linux Server

Using the command line on a Windows system running the FlexLM license server:

1. Stop server: Enter
lmutil lmdown -c [path to license file]
2. Start server: Enter
lmutil lmgrd -c [path to license file]

The service will restart. Client computers will be able to connect as usual.

How to move the license server

Should you need to move the KeyShot Floating license server to a new computer, please follow the following instructions to ensure you are up and running quickly.

1. Follow the steps above for installing the license server on the new machine.
2. Send the following information to license@luxion.com.
 - Old license file
 - New Computer Host name
 - New Computer MAC Address
 - Letter on company letterhead stating the old license server will be removed.

We will usually send your license file within 24 hours during business days (Mon-Fri). Should you have any questions please contact us at license@luxion.com.

KeyShot Pro Floating - Client Installation

1. Gather Server Information

Before installing, make sure that the KeyShot Floating license server has been installed on a computer in the network and gather the following information from that computer:

- Computer Host name
- Computer IP Address

2. Install KeyShot Pro Floating

Install the KeyShot Pro Floating (FL) client software on all the user's computers. You may download the KeyShot Floating client application here:

[KeyShot Pro Floating - Windows](#)

[KeyShot Pro Floating - MacOS](#)

3. Enter Server Information

When first installed, the KeyShot Floating client application will ask you to *Specify the License Server System*.

Windows - Enter the *Computer Name* at the first prompt

Mac - Enter *[port number]@[server's IP address]* (e.g. 27000@192.168.1.123)

KeyShot Pro Floating will remember the server location from now on. For more information please refer to the relevant section for your installation in the [Pro Floating Installation manual](#).

Should you have any questions, please contact us at license@luxion.com.

Luxion License Server Installation

The instructions below will walk you through a typical first-time license service setup. Our licensing team will provide you with a license file and the appropriate software links. You may reach our licensing team at license@luxion.com.

1. Install Server

Install Luxion License Server. Our licensing team will provide software download links once your purchase has been processed.

2. Request License

Click on the Request License tab to generate a request-message for our licensing team.

1. Name: Enter your name
2. Company Name: Enter your company name
3. Serial: Enter the 20 character serial code that was provided to you by our licensing team
4. Hostname: Is pre-filled with your computers information.
5. MAC address: Is pre-filled with your computers information.
6. Message: The information entered above will be combined into the message for our licensing team.
7. Email: this will send the request by email to license@luxion.com
8. Copy to clipboard: allows you to easily copy the entire message.

On this page:

- 1. Install Server
- 2. Request License
- 3. Install License
- 4. Status - available/used licenses
- 5. Set Server Ports
- 6. License Folder

Luxion License Server

Request License Install License

Please fill in your information and email your request to license@luxion.com.
You will receive a license file within 24 hours.

1 Name: Your name

2 Company Name: Your Company

3 Serial: xxxxxxxxxxxxxxxxxxxxxx

4 Hostname: Lisbeths-MacBook-Pro.local

5 MAC: xxxxxxxxxxxxxx

6 CUSTOMER Your Company
SERIAL xxxxxxxxxxxxxxxxxxxxxx
SERVER Lisbeths-MacBook-Pro.local xxxxxxxxxxxxxx
VENDOR LUXION

Requested by Your name

7 Email 8 Copy to Clipboard


Close

3. Install License

Click on the install License Tab to install the .lic file you have received from our licensing team.

1. Click the *Install License* button.
2. Locate and select the .lic file in the explorer/finder window.
3. The *License info* is displayed.
4. Check that the service is started.
5. The Luxion License Server window can now be closed, it is not necessary to keep it open for the floating licenses to be available,

they can be accessed as long as the server is online, and the service is not stopped.

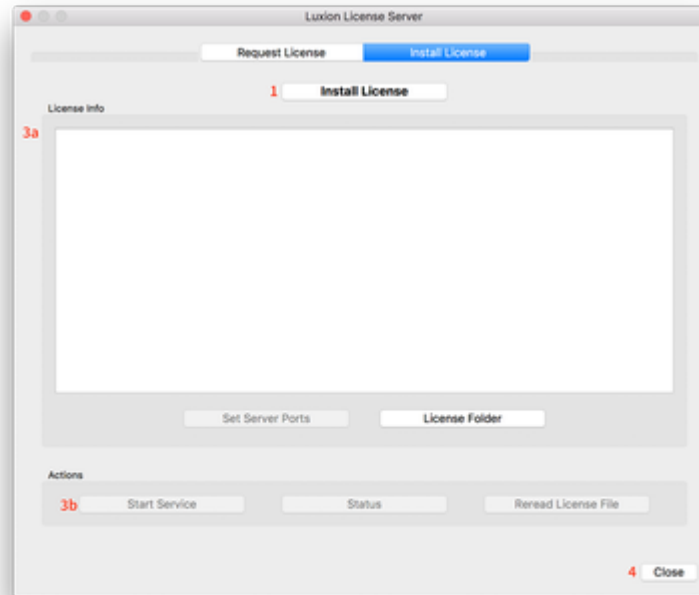


4. Status - available/used licenses

To monitor available/used licenses:

1. Click *Status* button to trigger the status window
2. The Status window will display the types of licenses available and how many are in use.

Notice that "keyshot2" are Floating pro licenses and "keyshot_vr" are the XR add-on licenses.

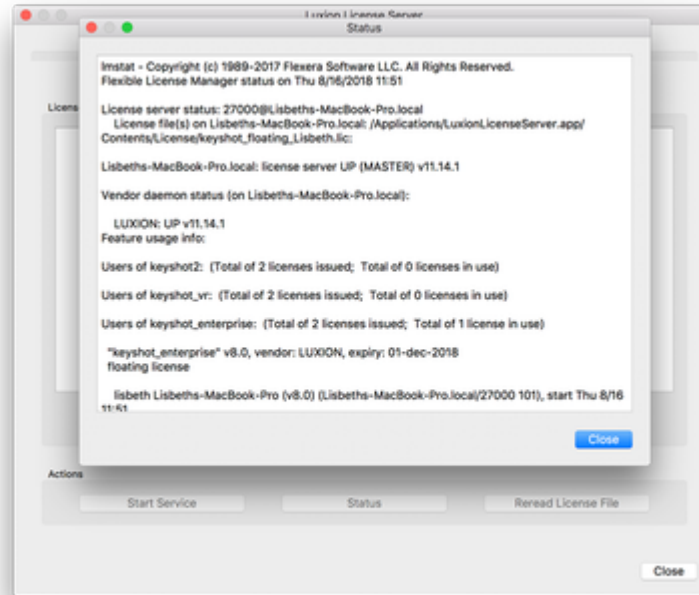

5. Set Server Ports

If you have a Firewall or have other License servers running on the same machine you may need to change the Server Ports, this can be done by clicking the *Server Ports* button.

- **FlexLM Port:** Change this to avoid port conflicts If you have other License servers - the default is 27000
- **Deamon Port:** This is only used for network setups with a Firewall. If a Firewall is used, both ports need to be set and opened in the Firewall.

6. License Folder

The *License Folder* button is mainly present for support purposes, It leads to the *License Folder* where log files, etc. regarding the License Server are stored.

Default locations for the License folder are.

- **Windows:** C:\ProgramData\Luxion\License
- **Mac:** /Applications/LuxionLicenseServer.app/Contents/License

Related

- [KeyShot Pro Floating Installation](#)
- [Changing Server Connection.](#)

License Server Installation (Linux)


The instructions below will walk you through the typical first-time license service setup on Linux. Our licensing team will provide you with a license file and the appropriate software links. You may reach our licensing team at license@luxion.com.

License Server Setup Instructions

If you are running RedHat Linux skip steps 3, 4 and 5.

1. Download and unzip the "[KeyShot_Floating_License_Server_Linux.zip](#)" file into the your home folder ("/home/<your username>" or "~/")
2. Open the terminal (usually *Ctrl* + *Alt* + *T*) and change your current directory to the *luxion_flexlm* folder ("~/luxion_flexlm")

```
cd luxion_flexlm/
```

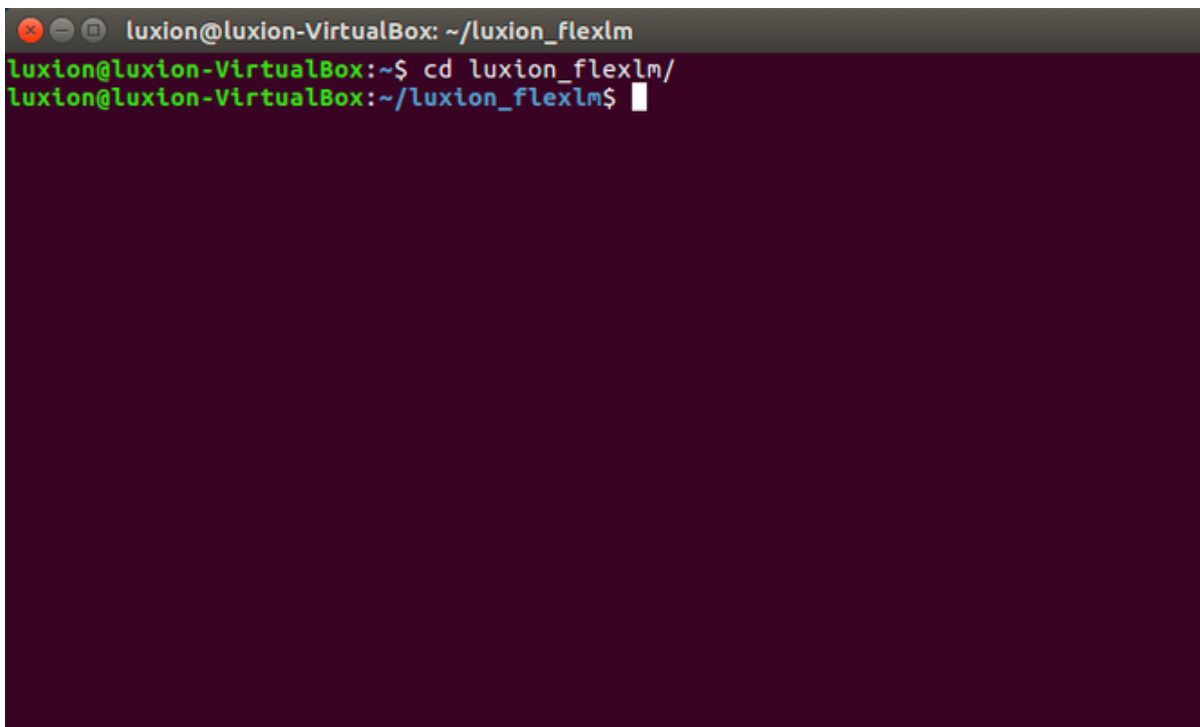A screenshot of a Linux terminal window. The title bar shows 'luxion@luxion-VirtualBox: ~/luxion_flexlm'. The terminal has a dark purple background. The prompt is 'luxion@luxion-VirtualBox:~\$'. The user enters 'cd luxion_flexlm/' and the prompt changes to 'luxion@luxion-VirtualBox:~/luxion_flexlm\$' with a cursor at the end.

```
luxion@luxion-VirtualBox: ~/luxion_flexlm
luxion@luxion-VirtualBox:~$ cd luxion_flexlm/
luxion@luxion-VirtualBox:~/luxion_flexlm$
```


If you are running RedHat Linux skip the next 3 steps.

On this page

- [License Server Setup Instructions](#)

3. Run the following command:

```
ls -l /lib64/ld*
```

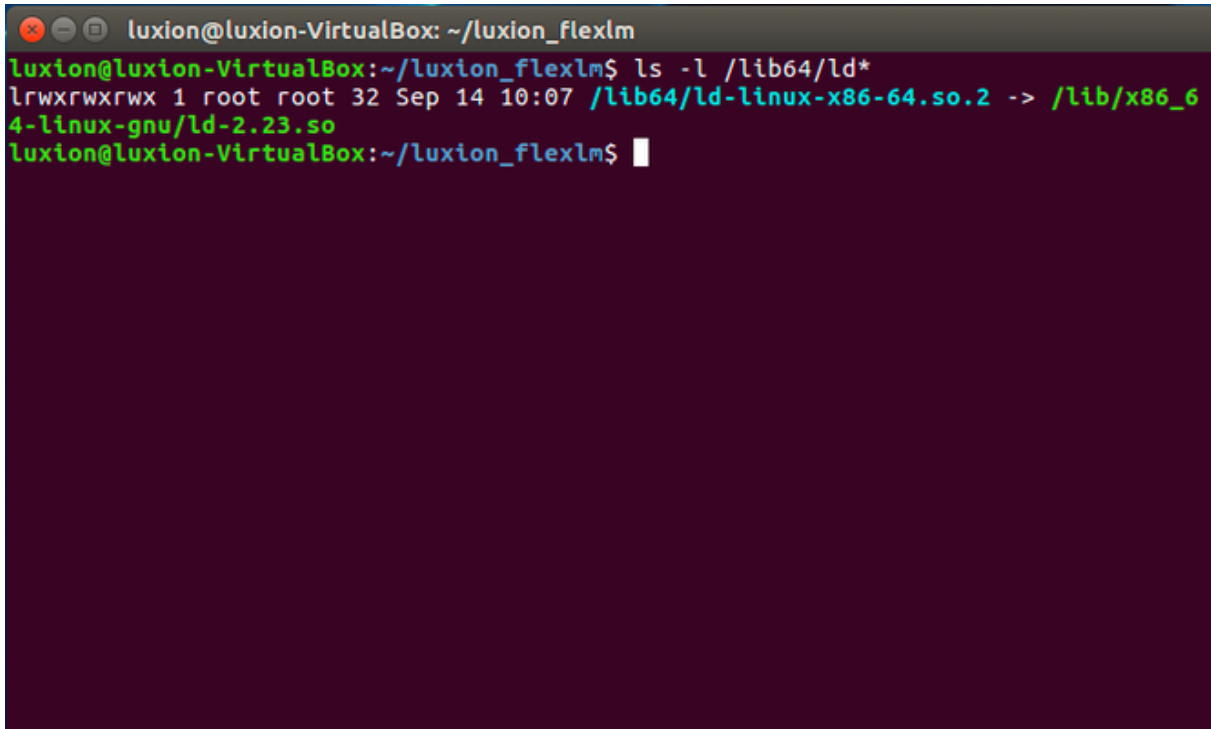A terminal window titled 'luxion@luxion-VirtualBox: ~/luxion_flexlm' shows the command 'ls -l /lib64/ld*' being executed. The output is 'lrwxrwxrwx 1 root root 32 Sep 14 10:07 /lib64/ld-linux-x86-64.so.2 -> /lib/x86_64-linux-gnu/ld-2.23.so'. The return value '2' before the arrow is highlighted in green. The prompt 'luxion@luxion-VirtualBox:~/luxion_flexlm\$' is visible at the bottom.

```
luxion@luxion-VirtualBox: ~/luxion_flexlm
luxion@luxion-VirtualBox:~/luxion_flexlm$ ls -l /lib64/ld*
lrwxrwxrwx 1 root root 32 Sep 14 10:07 /lib64/ld-linux-x86-64.so.2 -> /lib/x86_6
4-linux-gnu/ld-2.23.so
luxion@luxion-VirtualBox:~/luxion_flexlm$
```

4. Take note of the return value before the arrow (highlighted in the picture).

5. Run the following command where <value from step three before the arrow> is the value from step 3 before the arrow.

```
sudo ln -s <value from step 3> /lib64/ld-lsb-x86-64.so.3
```

```
luxion@luxion-VirtualBox: ~/luxion_flexlm
luxion@luxion-VirtualBox:~/luxion_flexlm$ ls -l /lib64/ld*
lrwxrwxrwx 1 root root 32 Sep 14 10:07 /lib64/ld-linux-x86-64.so.2 -> /lib/x86_64-linux-gnu/ld-2.23.so
luxion@luxion-VirtualBox:~/luxion_flexlm$ sudo ln -s /lib64/ld-linux-x86-64.so.2 /lib64/ld-lsb-86-64.so.3
[sudo] password for luxion:
luxion@luxion-VirtualBox:~/luxion_flexlm$
```

6. Move your license file to your luxion_flexlm folder, where your file would have your computer name instead of *MyCompany*.

```
mv ~/Desktop/keyshot_floating_MyCompany.lic ~/luxion_flexlm/
```

```
luxion@luxion-VirtualBox: ~/luxion_flexlm
luxion@luxion-VirtualBox:~/luxion_flexlm$ mv ~/Desktop/keyshot_floating_MyCompany.lic ~/luxion_flexlm/
luxion@luxion-VirtualBox:~/luxion_flexlm$
```

7. Run the following command to star the service, where your file would have your computer name instead of *MyCompany*.

```
./lmgrd -C keyshot_floating_MyCompany.lic
```

```
luxion@luxion-VirtualBox: ~/luxion_flexlm
luxion@luxion-VirtualBox:~/luxion_flexlm$ ./lmgrd -C keyshot_floating_My_Company
.lic
14:51:33 (lmgrd) -----
14:51:33 (lmgrd) Please Note:
14:51:33 (lmgrd)
14:51:33 (lmgrd) This log is intended for debug purposes only.
14:51:33 (lmgrd) In order to capture accurate license
14:51:33 (lmgrd) usage data into an organized repository,
14:51:33 (lmgrd) please enable report logging. Use Flexera Software LLC's
14:51:33 (lmgrd) software license administration solution,
14:51:33 (lmgrd) FlexNet Manager, to readily gain visibility
14:51:33 (lmgrd) into license usage data and to create
14:51:33 (lmgrd) insightful reports on critical information like
14:51:33 (lmgrd) license availability and usage. FlexNet Manager
14:51:33 (lmgrd) can be fully automated to run these reports on
14:51:33 (lmgrd) schedule and can be used to track license
14:51:33 (lmgrd) servers and usage across a heterogeneous
14:51:33 (lmgrd) network of servers including Windows NT, Linux
14:51:33 (lmgrd) and UNIX.
14:51:33 (lmgrd) -----
14:51:33 (lmgrd)
14:51:33 (lmgrd)
14:51:33 (lmgrd) Server's System Date and Time: Fri Sep 30 2016 14:51:33 PDT
```

8. Run the following command to check the service status:

```
./lmstat -a
```

The lmstat output will confirm that the license server is up. The output message will also show you how many license seats are issued (available).

KeyShot Pro Floating Installation

Now that your server is up and running, you are ready for the client setup on your computer. The instructions below will walk you through the registration process for floating licenses.

KeyShot Pro Floating Setup Instructions

1. Download and install the KeyShot Pro Floating application. To download KeyShot, click [here](#).
2. Launch KeyShot 8.
3. Select *Floating License* and click *Continue*

If you are currently in demo mode, open the registration wizard from


- Windows: *Help > Register License*
- Mac: *KeyShot > Register License (Mac)*

On this page


- [KeyShot Pro Floating Setup Instructions](#)




4. Enter the hostname of your license server. If the server uses another FlexLM port than the standard (27000) you need to specify the port number, followed by the "@" sign and the server's hostname (for example, 27000@KeyShotServer.local). Click *Connect*.

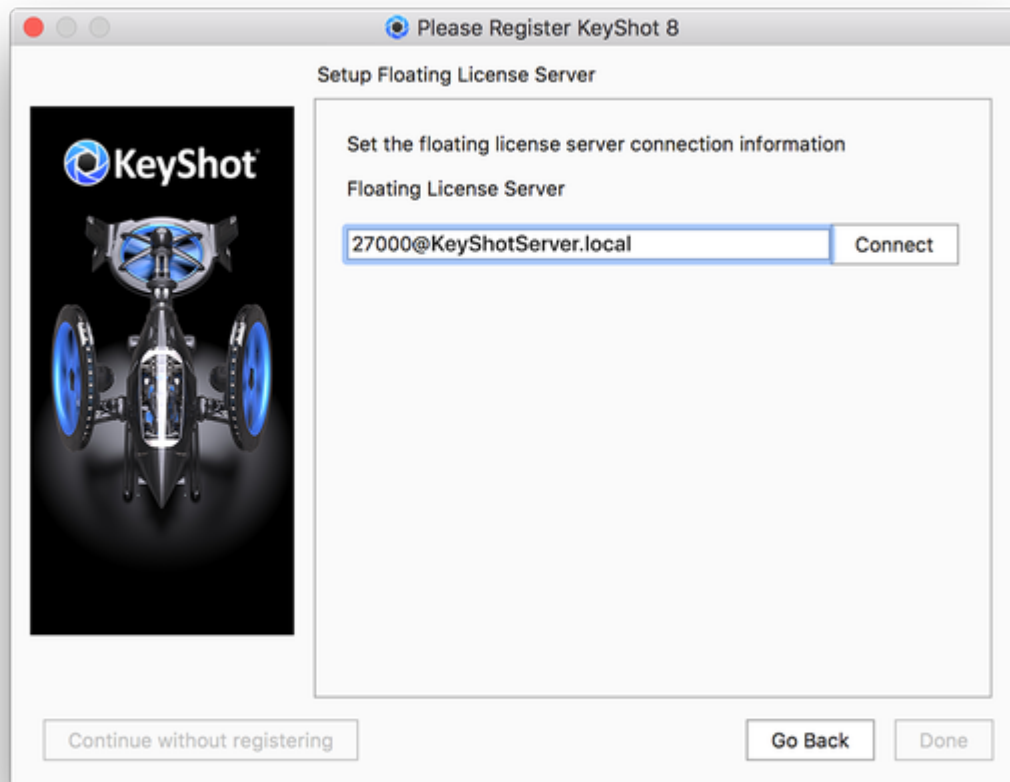

You may also use the server's IP Address (use the IP Address if your license server is a PC). For example, *27000@192.168.1.1*
23. Click *Connect*.

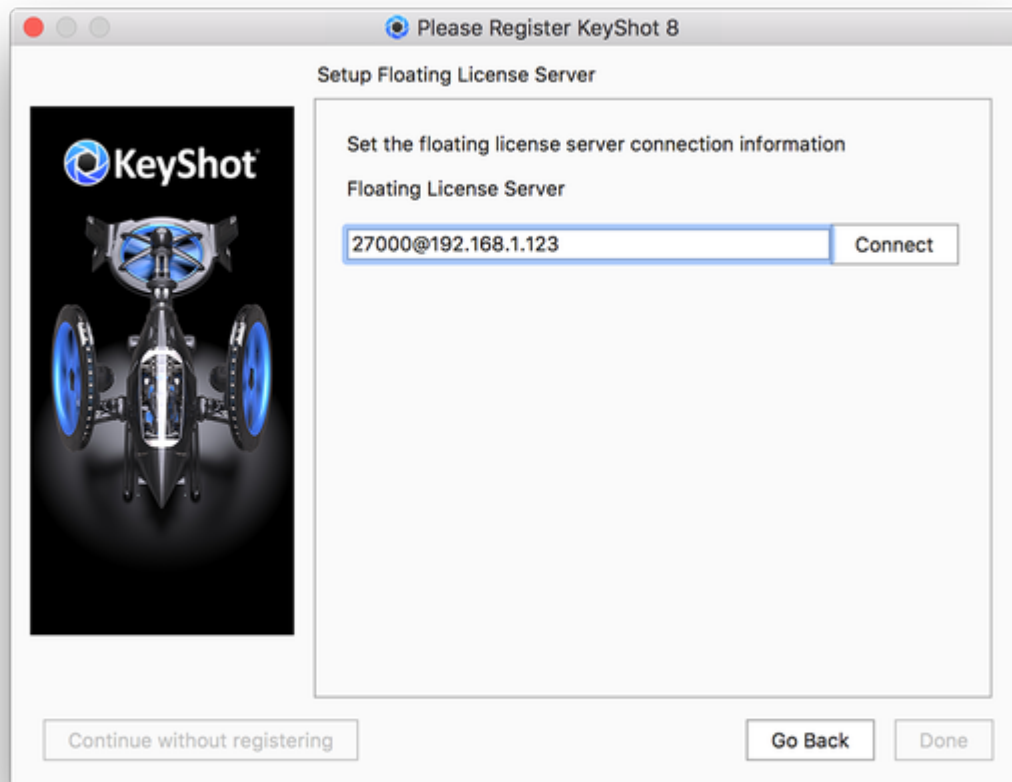

4. Review your license features, select the type of license you want to use and if you need KeyShot XR and Click *Done*.

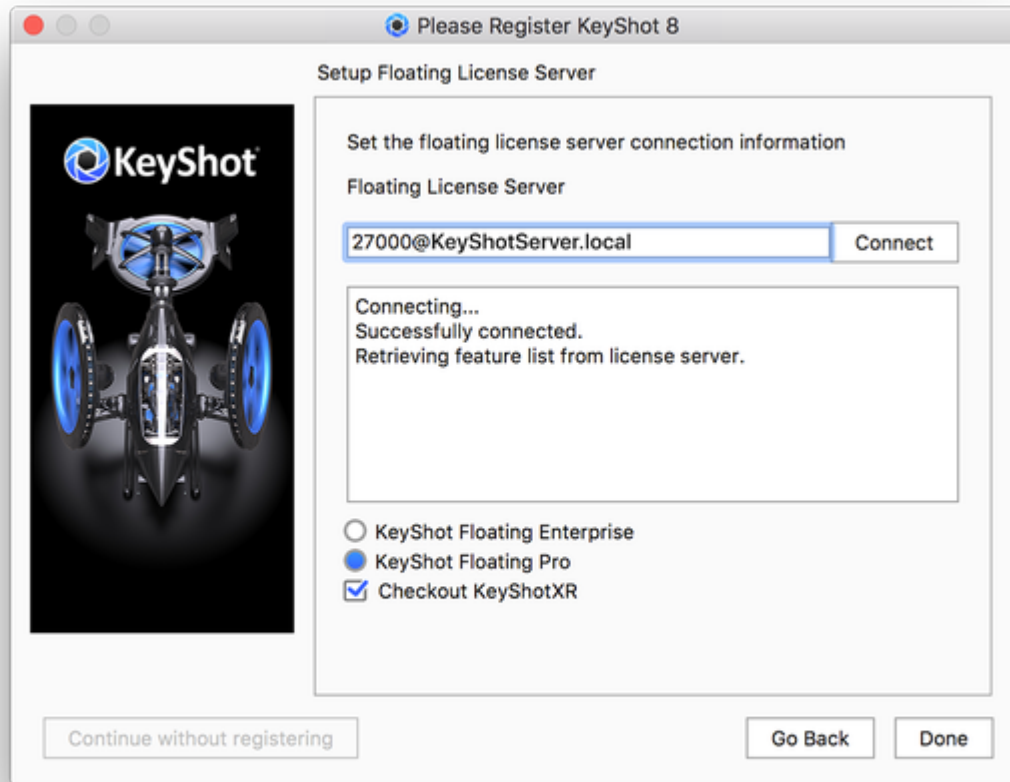

KeyShot Pro Floating will start. From now on, KeyShot will remember the server information. You will be able to check out the license as long as your system can connect to the computer acting as the license server.

Technical Tip: If your service status window does not look similar to the above image or if you are getting an error message when you start the server, you can use the [troubleshooting guide](#) for diagnosis. You may also contact Luxion Customer Support at support@luxion.com for assistance.


Borrowing A License

As you know, to check out a KeyShot Pro Floating license, your computer must be connected to the license server. To continue using KeyShot Pro Floating, the connection must be maintained at all times. But what if you want to work from a remote location and take KeyShot with you? Well, then you borrow the license.

The client and server must be connected during the borrowing process. Once you've borrowed the license, you can take your laptop and KeyShot anywhere for up to 30 days. Educational license holders must submit a request with their IT staff to activate this feature.


How To Borrow A License

1. Ensure that your client computer can connect to the server,
2. Open KeyShot Pro Floating.
3. **Windows:** In the Main menu click *Help, Borrow Floating License*.
Mac: In the Main menu click *KeyShot, Borrow Floating License*.
4. Select a return date and click *OK*.
5. You will receive a confirmation message. Click *OK*

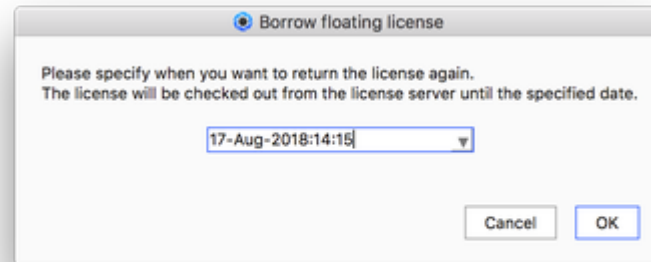

How To Return A Borrowed License

1. Ensure that your client computer can connect to the server (otherwise, this will not work).
2. Open KeyShot Pro Floating.
3. **Windows:** In the Main menu click *Help, Return Borrowed Floating License*.
Mac: In the Main menu click *KeyShot, Return Borrowed Floating License*.
4. You will be asked to confirm this action. Click *Yes*.
5. You will receive a confirmation message. Click *OK*

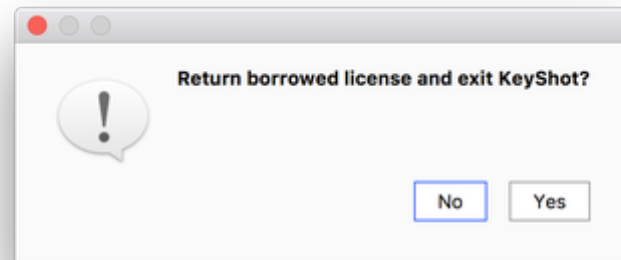

On this page

- [How To Borrow A License](#)
- [How To Return A Borrowed License](#)

Note: Other clients cannot checkout or borrow a license seat that has already been borrowed. The borrowed license seat remains with the client that borrowed it until the return date expires or until the client manually returns the license seat. If your license server holds more than one license seat, the remaining seats can still be checked out normally.

Changing Server Connection

For larger companies, there may be more than one KeyShot license server at the same or multiple locations.

KeyShot allows you to choose between different license servers. Below you will find instructions for changing the license server connection within KeyShot.

Please contact your IT department for VPN connection instructions when trying to connect to a remote license server.

How To Change Your License Server Connection

1. Ensure that your client computer can connect to the current server.
2. Open KeyShot Pro Floating.
3. **Windows:** Go to the main menu and click *Help, Change Floating License Server*.
Mac: Go to the main menu and click *KeyShot, Change Floating License Server*.
4. Change the port number and the hostname/IP address as needed. Click *OK*.

Technical Tip

Please refer to the included [troubleshooting](#) section if you are unable to establish your new client-server connection.

Enabling KeyShotXR

KeyShotXR is included with your [KeyShot Enterprise](#) license. Otherwise, it is sold separately as an [add-on](#).

KeyShotXR allows you to create interactive (touch-enabled) visuals for your website. Please refer to the [KeyShotXR section](#) for additional information regarding KeyShotXR features.

How To Enable KeyShotXR

1. Windows: Go to the main menu and click *Help, Select Floating License Type*.
Mac: Go to the main menu and click *KeyShot, Select Floating License Type*.
2. Enable *Check out KeyShotXR feature from license server*.
3. Click *OK*. KeyShot will restart and KeyShotXR will be enabled.

Note

If your license does not contain the KeyShoXR feature, then KeyShot will tell you that there are "no additional options available".

On this page

- [How To Enable KeyShotXR](#)

Pro Floating Troubleshooting

This troubleshooting guide will help you diagnose the cause of an error message and assist you in finding a solution. Below, we list errors under two main categories: server errors and client errors. Errors inside KeyShot License Manager are server errors. Errors from KeyShot Pro Floating are client errors. Please find your error in the categories shown below.

In this section

- Server Error: Invalid Hostname (unpublished)
- Server Error: Invalid Mac Address (unpublished)
- Server Error: Expired License (unpublished)
- Server Error: Cannot Connect (unpublished)
- Server Error: Unknown Hostname (unpublished)
- Server Error: License File Not Found
- Client Error: Looping Prompt
- Client Error: No Licenses Available
- Client Error: Unsupported KeyShot Version
- Client Error: Unknown Error

Server Error: License File Not Found

Reason: The licensing software (lmgrd) is unable to read the license file in your FlexLM folder.

How To Fix It:

1. Browse to *C:\ProgramData\Luxion*.
2. Right-click the License folder and select Permissions.
3. Select "Properties"
4. Disable "Read only"
5. Go to the Security tab
6. Click the Edit button. Ensure that all users have read and write permissions
7. Click Apply and OK
8. Click Apply and OK once more.
9. Once all users have read and write permissions into the License folder and its contents, re-start the license service from LMTools.

Technical Tip: You may also contact Luxion Customer Support at support@luxion.com for assistance.

Client Error: Looping Prompt

Reason: This means that KeyShot is unable to connect to KeyShot License Manager on your license server.

Please check

Server status

Is your license server running properly? You can check the service status within the LUXION.log file (found inside your [License Folder](#)). If you find any problems, see server errors for troubleshooting.

Computer connection

Make sure that your client computer can ping the license server and that your client computer can “see” the server in your office network. Contact your IT department if you are using a VPN connection.

Server Ports

Remember that KeyShot uses port number 27000 by default. It is possible that another application in your computer is using this port. You can try to change the port number in the license first and then inside KeyShot Pro Floating. Please refer to instructions on how to [change the port number](#).

Firewall/Anti-virus settings

Turn off the firewall on the server and the client. If this is already the case, then you can try to add LUXION.exe and Imgrd.exe to the list of programs allowed through the firewall and through the anti-virus. Please consult your IT representative for further assistance with firewall/anti-virus settings.

Client Environment Variable/Registry

Depending on your system’s restrictions, it is possible that KeyShot is unable to save the Server information. If so, you can manually edit this:

- PC: [registry entry](#)
- Mac: [environment variable](#).

In this section

- [Edit Registry \(PC\)](#)
- [Environment Variable \(Mac\)](#)

Technical Tip: If results are not consistent with the above, please reference other possible solutions in the [troubleshooting guide](#). You may also contact Luxion Customer Support at support@luxion.com for assistance.

Edit Registry (PC)

Earlier you learned [how to connect KeyShot Pro Floating](#) to the license server system. When you specify the server name in KeyShot, a registry entry is created. Depending on your system's restrictions, it is possible that KeyShot is unable to write into the Windows registry. If so, you can manually edit this registry entry.

How To Edit The Registry Entry

1. Make sure that the KeyShot application is closed. Then, click the Windows Start button and search for "regedit.exe".
 2. Launch the *Registry Editor* (*regedit.exe*)
 3. Go to *HKEY_CURRENT_USER > Software > FlexLM License Manager*.
 4. While the *FlexLM License Manager* key is selected you will see a string called *LUXION_LICENSE_FILE*. If you don't see this string, then create a new string. You can go to *Edit > New > String Value* and name it *LUXION_LICENSE_FILE*.
- Note:** You may also create the *FlexLM License Manager* key inside *HKEY_CURRENT_USER, Software* (i.e. *Edit > New > Key*)
.
5. Right-click the *LUXION_LICENSE_FILE* string and select "Modify".
 6. Change the *Value data* to the correct port number at the server's IP Address (e.g. 27000@192.168.1.123). Click *OK*, then close the *Registry Editor*.
 7. You may now open KeyShot on your client computer.

Environment Variable (Mac)

Earlier, you learned how to connected [KeyShot Pro Floating](#) to the license server system. When you specify the server name in KeyShot, an environment variable is created. Depending on your system's restrictions, it is possible that KeyShot is unable to write into the environment variable. If so, you can manually edit this file.

How To Edit The Environment Variable

1. Open up the terminal. Make sure you are in the home directory.
2. Type the following command to open the environment variable in vim (text editor): `vim .flexlmrc`
3. Press *Enter*.
4. Press the *"i"* key to start insert mode.
5. Change the IP Address or hostname to the correct server location (e.g. 27000@192.168.1.123). Once done, Press *ESC* on your keyboard to exit insert mode.
6. Hold *Shift* and press the *semicolon/colon* key.
7. Type the following command to write and quit: `wq`
8. Press *Enter*. You will be brought back to the screen shown in **step 2** above.
9. You may now open KeyShot on your client computer.

Client Error: No Licenses Available

Reason: There are no more licenses available on the server. This means that the license server has issued all the available license seats to other clients in your office network.

How To Fix It:

1. Close KeyShot Pro Floating on one of your other clients.
2. Re-open KeyShot Pro Floating on the desired client.

Technical Tip: If results are not consistent with the above, please reference other possible solutions in the [troubleshooting guide](#). You may also contact Luxion Customer Support at support@luxion.com for assistance.

Client Error: Unsupported KeyShot Version

Reason: Your current floating license does not support the version of KeyShot that you are trying to open.

How To Fix It:

1. Send an email to license@luxion.com describing the error message. You will want to attach the *Luxion.log* and your current license file found in the [License folder](#).
2. Once you receive your new license file, follow the [license replacement](#) instructions.
3. If KeyShot is not connecting to the server automatically, change the Server information manually:
 - PC: Editing the [registry entry](#)
 - Mac: Editing the [environment variable](#).

Technical Tip: If results are not consistent with the above, please reference other possible solutions in the [troubleshooting guide](#). You may also contact Luxion Customer Support at support@luxion.com for assistance.

Client Error: Unknown Error

Reason: The Unknown Error error means that your license server is running outdated software.

How To Fix It:

1. Download the latest Luxion License Server update.
 - [Luxion License Server - Windows](#)
 - [Luxion License Server - Mac OS X](#)
2. Run the installer file and follow the prompts on the installation wizard.
3. Launch the *Luxion License Server* application and click *New License* to reload the license.
4. It is also a good idea to update KeyShot itself. You can check for updates from the Help menu inside KeyShot.
5. Once your server is up to date and running, KeyShot will start properly.

Pro Floating Advanced Setup

FlexNet licensing tools and methods are commonly utilized in the software industry. This licensing method includes a myriad of different advanced features. In fact, there is an entire [FlexNet licensing manual](#) on the web. In this section, you will find definitions to common terminology and useful information for your advanced IT specialist.

In this section

- [License Server Installation \(PC\) - Custom](#)
- [License Server Installation \(Mac\) - Custom](#)
- [Replace License File](#)

License Server Installation (PC) - Custom


The *Floating License Configurator* application automatically creates a service in *LMTools*. But what if you wish to create a custom license service? Then, you will need to understand *LMTools* in greater detail. The instructions below will walk you through creating your very own custom license service. Our licensing team will provide you with a license file and the appropriate software links. You may reach our licensing team at license@luxion.com. If you already have a license server set up you can then [make changes](#).

Custom License Server Setup Instructions

1. Download and run the "keyshot_floating_license_server.exe" installer. Follow the prompts and make sure that "Run KeyShot Floating License Server 1.0" is disabled. Click Finish.


On this page

- [Custom License Server Setup Instructions](#)
 - [Setting The License server up with a Fire-Wall:](#)

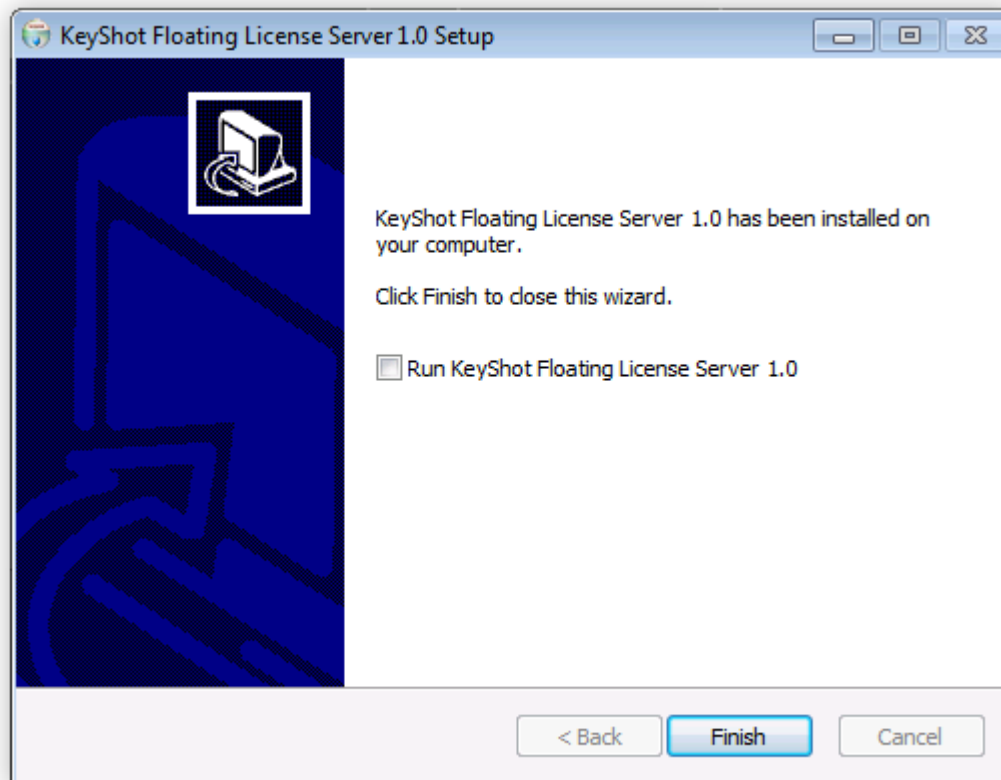


2. Launch the *LMTools* application (found inside *C:\FlexLM*) and go to the Config Services tab.


3. Write a new service name.

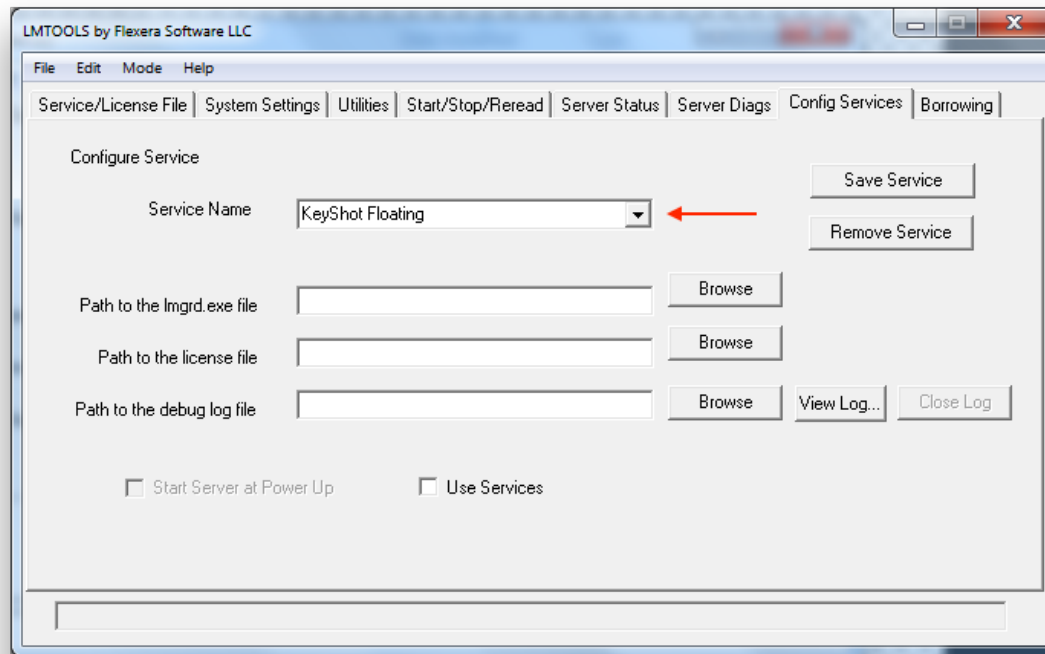


4. Browse to the *lmgrd.exe*, license (*.lic*), and *debug.log* files. You should be able to find all of these files in your *C:\FlexLM* folder. Note that the *debug.log* is created after you start the service. For now, you can simply specify the correct path: *C:\FlexLM\debug.log*

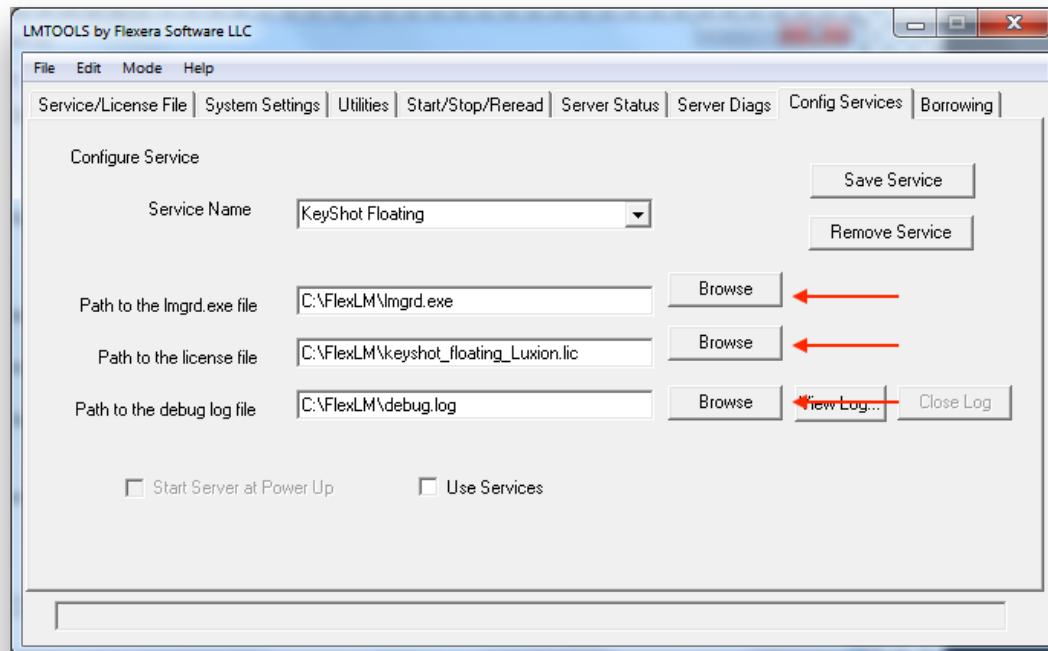


5. Enable *Start Server at Power Up* and *Use Services*. Then click *Save Service* and confirm.

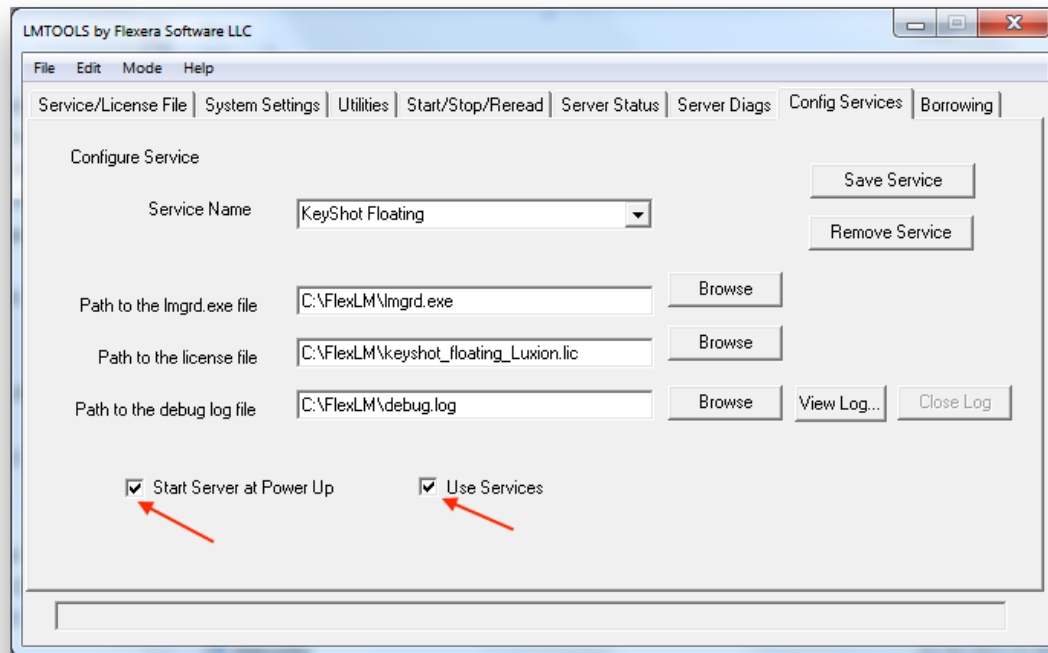


6. Launch *LMTools* and go to the *Start/Stop/Reread* tab. Enable *Force Server Shutdown* and click *Stop Server*. You may also stop the *KeyShot Floating* service within the *Windows Services* dialog (*services.exe*).

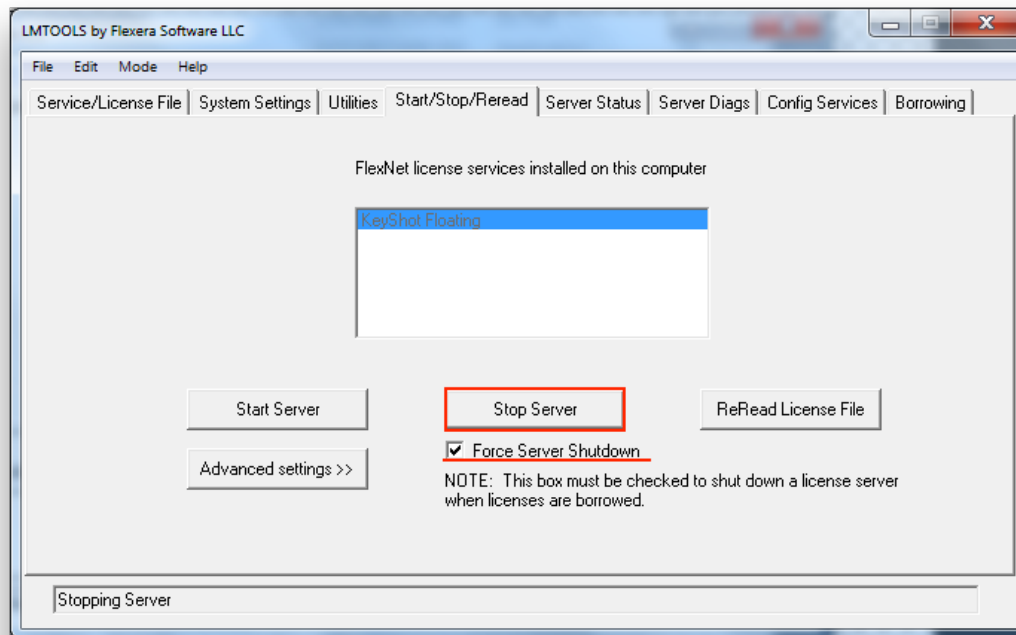

7. Click *Start Server*. You may also start the *KeyShot Floating* service within the *Windows Services* dialog (*services.exe*).

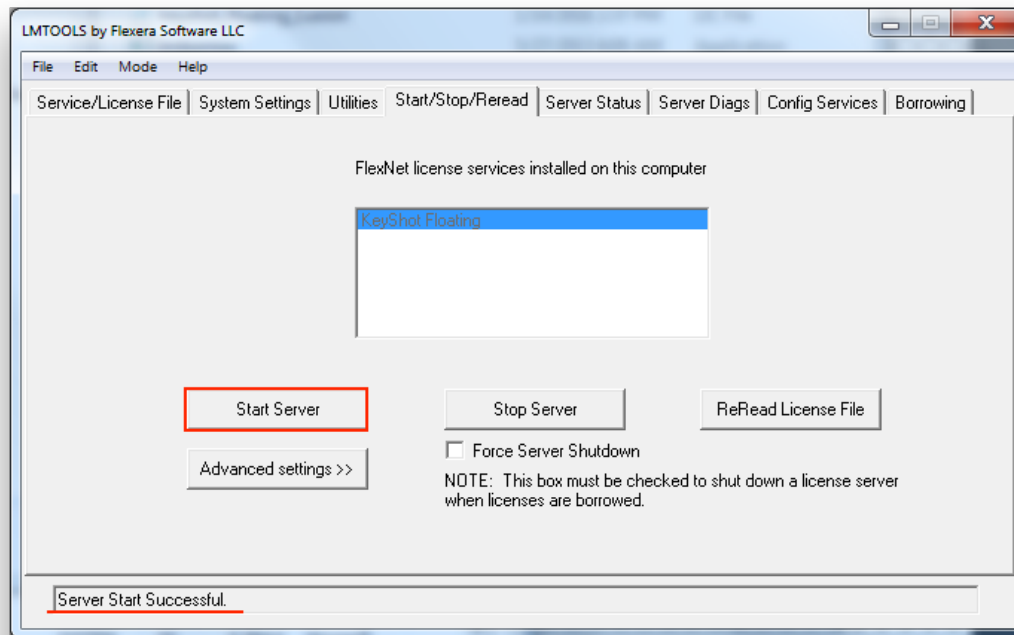

8. Open the *debug.log* file inside your *C:\FlexLM* folder (this folder contains the licensing software). The debug log will reference your license file and tell you that the server started on your computer system.

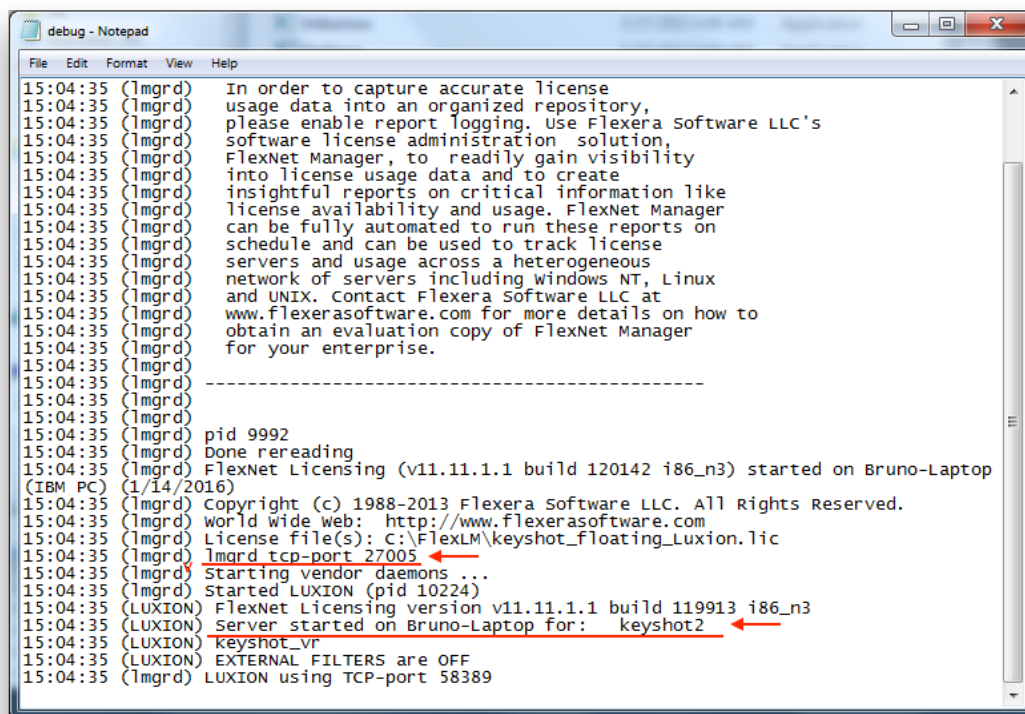

```
debug - Notepad
File Edit Format View Help
15:04:35 (lmgrd) In order to capture accurate license
15:04:35 (lmgrd) usage data into an organized repository,
15:04:35 (lmgrd) please enable report logging. Use Flexera Software LLC's
15:04:35 (lmgrd) software license administration solution,
15:04:35 (lmgrd) FlexNet Manager, to readily gain visibility
15:04:35 (lmgrd) into license usage data and to create
15:04:35 (lmgrd) insightful reports on critical information like
15:04:35 (lmgrd) license availability and usage. FlexNet Manager
15:04:35 (lmgrd) can be fully automated to run these reports on
15:04:35 (lmgrd) schedule and can be used to track license
15:04:35 (lmgrd) servers and usage across a heterogeneous
15:04:35 (lmgrd) network of servers including windows NT, Linux
15:04:35 (lmgrd) and UNIX. Contact Flexera Software LLC at
15:04:35 (lmgrd) www.flexerasoftware.com for more details on how to
15:04:35 (lmgrd) obtain an evaluation copy of FlexNet Manager
15:04:35 (lmgrd) for your enterprise.
15:04:35 (lmgrd) -----
15:04:35 (lmgrd) pid 9992
15:04:35 (lmgrd) Done rereading
15:04:35 (lmgrd) FlexNet Licensing (v11.11.1.1 build 120142 i86_n3) started on Bruno-Laptop
15:04:35 (lmgrd) (IBM PC) (1/14/2016)
15:04:35 (lmgrd) Copyright (c) 1988-2013 Flexera Software LLC. All Rights Reserved.
15:04:35 (lmgrd) world wide web: http://www.flexerasoftware.com
15:04:35 (lmgrd) License file(s): C:\FlexLM\keyshot_floating_Luxion.lic
15:04:35 (lmgrd) lmgrd tcp-port 27005
15:04:35 (lmgrd) Starting vendor daemons ...
15:04:35 (lmgrd) Started LUXION (pid 10224)
15:04:35 (LUXION) FlexNet Licensing version v11.11.1.1 build 119913 i86_n3
15:04:35 (LUXION) Server started on Bruno-Laptop for: keyshot2
15:04:35 (LUXION) keyshot_vr
15:04:35 (LUXION) EXTERNAL FILTERS are OFF
15:04:35 (lmgrd) LUXION using TCP-port 58389
```

Setting The License server up with a Fire-Wall:

It is important to note that FlexLM uses 2 Ports for the license server the LMGRD port(27000 by default) and the LUXION Vendor Daemon Port(assigned randomly unless Fixed in the License file).

These ports can be set in the License File.

- The lmgrd Port is set after the Computers Mac Address on the "SERVER Line".
- The vendor daemon port is set on the "VENDOR Line" after the Vendor Name using the syntax: port=<your port>

Below is an example, for the ports 27000 and 27010:

```
SERVER Hostname ffffffff 27000
VENDOR LUXION port=27010
FEATURE keyshot2 LUXION 7.0 permanent 2 DUP_GROUP=UHD BORROW=720 \
SIGN="XXXX XXXX XXXX XXXX XXXX XXXX XXXX XXXX XXXX XXXX \
XXXX XXXX XXXX XXXX XXXX XXXX XXXX XXXX XXXX XXXX XXXX \
XXXX XXXX XXXX XXXX XXXX XXXX XXXX"
```

In the given example you will have to open the ports 27000 and 27010 in the firewall for the server to function.


Technical Tip: If your debug log does not look similar to the above image or if you are getting an error message inside *Floating License Configurator*, then you can use the [troubleshooting guide](#) for guidance. You may also contact Luxion Customer Support at support@luxion.com for assistance.

License Server Installation (Mac) - Custom

The *KeyShot License Manager* application is just a graphical user interface to FlexNet licensing tools. KeyShot License Manager is great for quick setups. However, for better troubleshooting and customization your IT department may prefer to have direct access to the license manager (*lmgrd*) and the license manager status application (*lmstat*). In that case, you can create your license service manually.

Custom License Server Setup Instructions

1. Launch the Activity Monitor.app. Organize your processes by name. Find the *lmgrd* process and click *Force Quit* (click the crossed-stop-sign button). This will stop any existing license services.

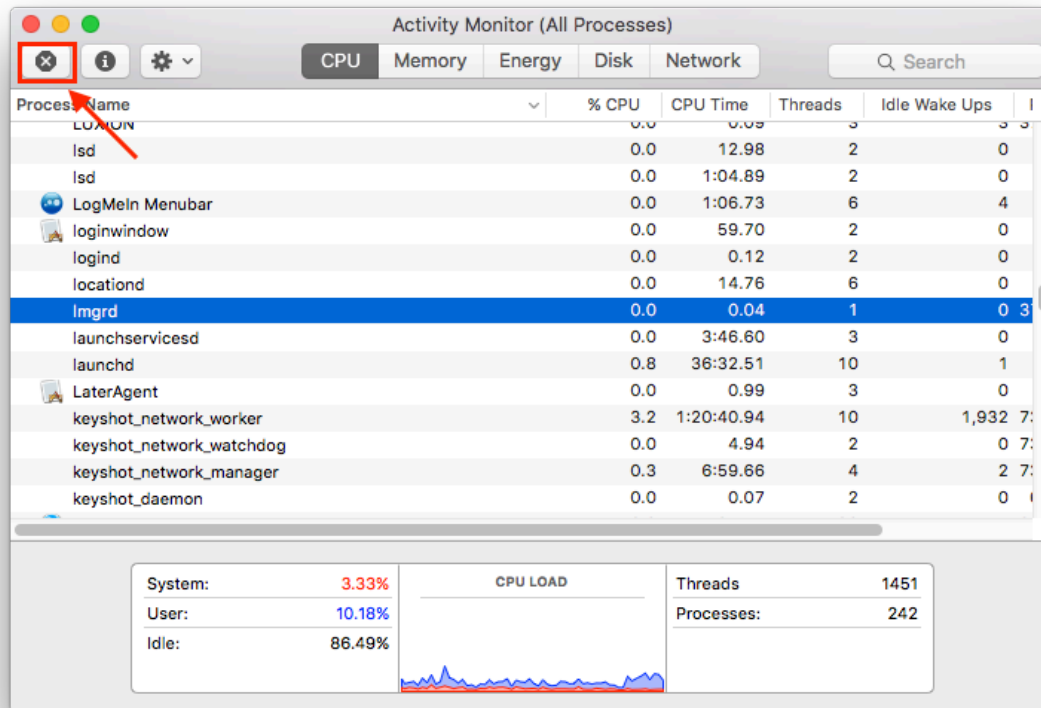


2. Download the latest FlexLM license server update from [here](#).


3. Once downloaded, move the FlexLM.zip file to your Applications folder and unzip it. Your FlexLM folder contains the main license management application, *lmgrd* and other useful applications that help you check the status of your service such as *lmstat*. Inside the FlexLM folder you will also be able to find the installation guide PDF.

On this page


- [Custom License Server Setup Instructions](#)

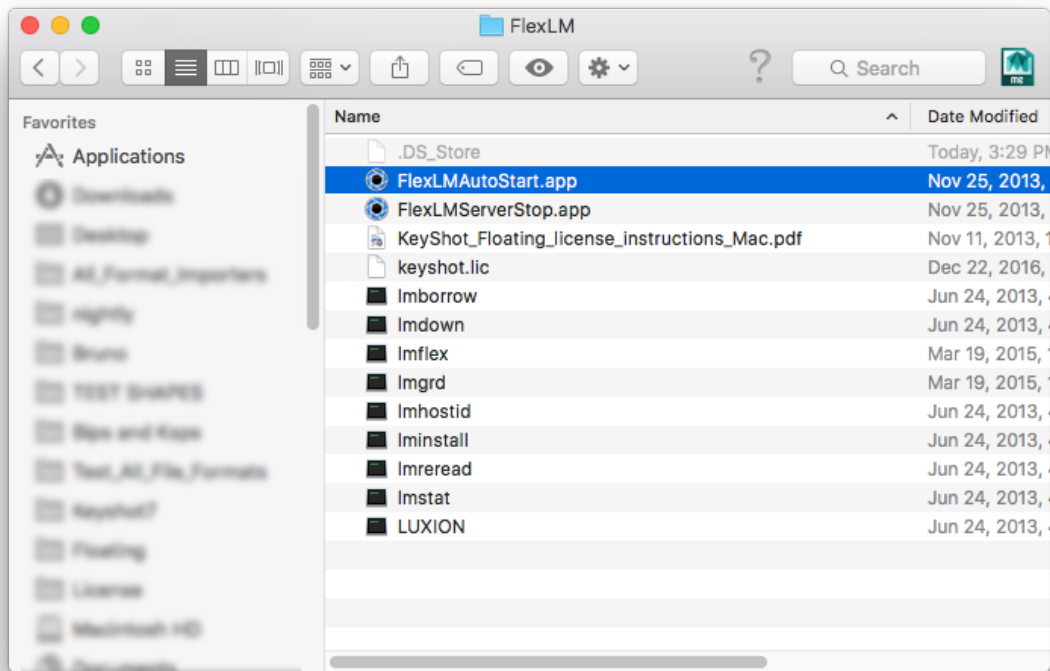

4. Rename your KeyShot license file to "keyshot.lic" and move it into the FlexLM folder. This is very important.

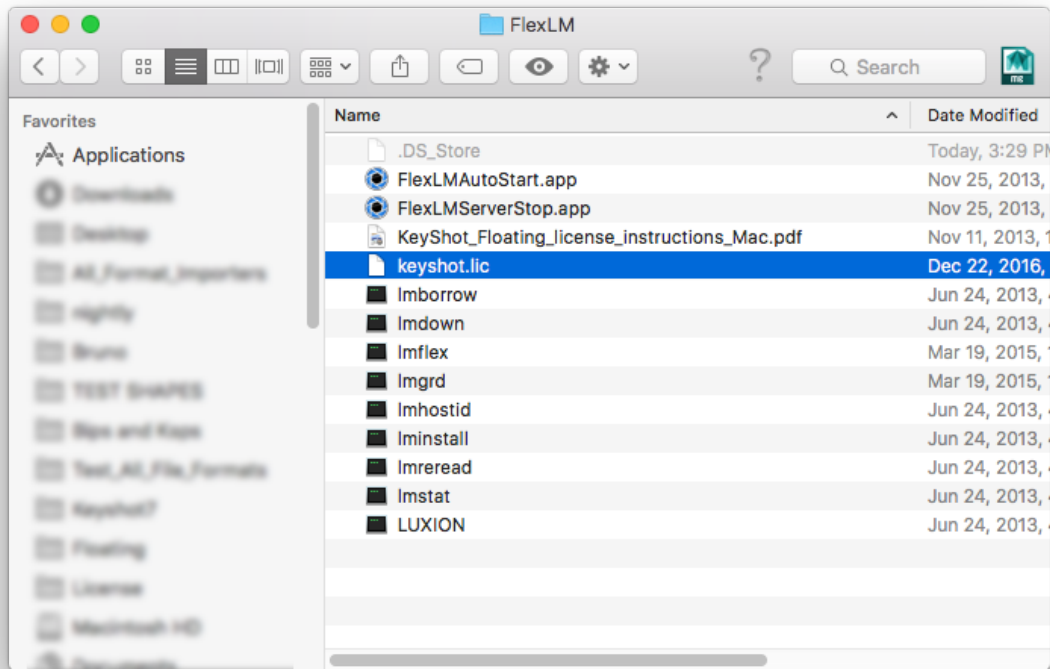

5. Right-click the FlexLMAutostart.app and select *Open*. If you are asked to confirm, then click Open once more. Your KeyShot license service will start right up.

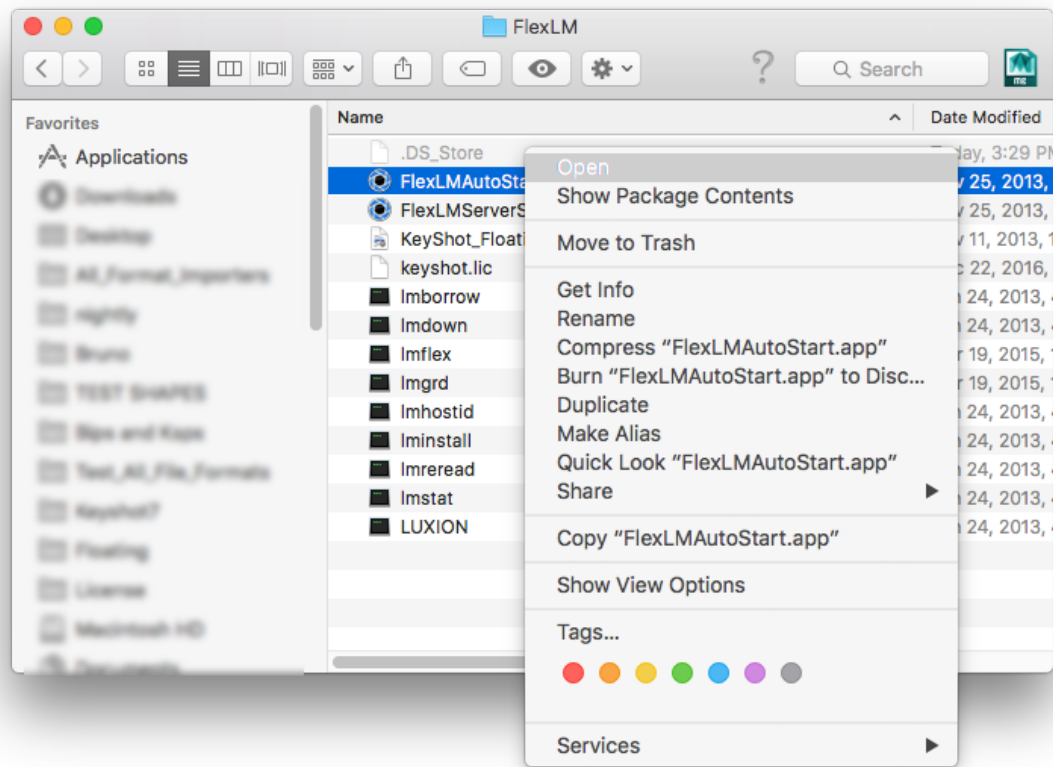

6. To confirm that your service is up and running, you can run the *Imstat* application inside the FlexLM folder.


Launch Terminal.app and change the directory to /Applications/FlexLM :

```
cd /Applications/FlexLM
```

Press *Enter*. Then, type:

```
sudo ./Imstat -a
```

Press *Enter* and type your password (no characters will appear as you type). If you think you made a mistake, simply delete and start over.

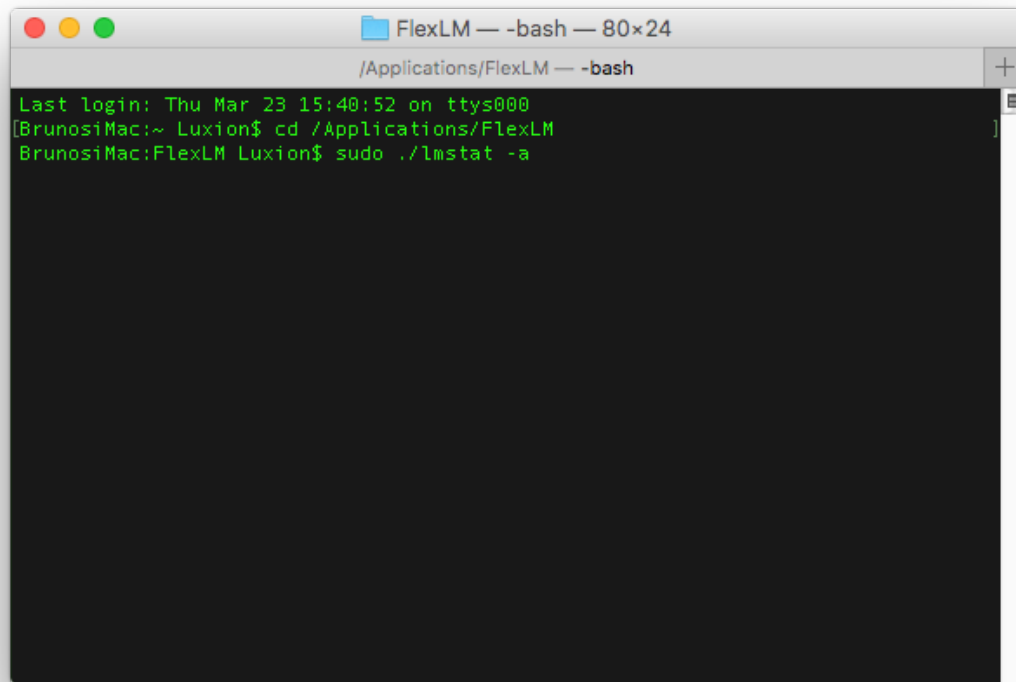A screenshot of a macOS terminal window. The title bar shows 'FlexLM — -bash — 80x24'. The terminal content shows a login message, a directory change to /Applications/FlexLM, and the execution of the 'lmstat -a' command. The output of the command is not visible in the screenshot.

```
FlexLM — -bash — 80x24
/Applications/FlexLM — -bash
Last login: Thu Mar 23 15:40:52 on ttys000
[BrunosiMac:~ Luxion$ cd /Applications/FlexLM
BrunosiMac:FlexLM Luxion$ sudo ./lmstat -a
```

Presse Enter one more time. If your service is running, *lmstat* will return a message stating that the “license server is UP (MASTER)...” and it will tell you the number of license issued as well as the number of licenses in use. Otherwise, please send a screenshot of the *lmstat* output to support@luxion.com for further assistance.

```
FlexLM — -bash — 85x35
/Applications/FlexLM — -bash
Last login: Thu Mar 23 15:40:52 on ttys000
[BrunosiMac:~ Luxion$ cd /Applications/FlexLM
[BrunosiMac:FlexLM Luxion$ sudo ./lmstat -a
[Password:
lmstat - Copyright (c) 1989-2013 Flexera Software LLC. All Rights Reserved.
Flexible License Manager status on Thu 3/23/2017 15:41

License server status: 27000@BrunosiMac.local
  License file(s) on BrunosiMac.local: /Applications/FlexLM/keyshot.lic:

BrunosiMac.local: license server UP (MASTER) v11.13
Vendor daemon status (on BrunosiMac.local):

  LUXION: UP v11.11
Feature usage info:

Users of keyshot2: (Total of 2 licenses issued; Total of 1 license in use)

  "keyshot2" v6.0, vendor: LUXION
  floating license


    Luxion BrunosiMac (v6.0) (BrunosiMac.local/27000 101), start Thu 3/23 15:36
Users of keyshot_vr: (Total of 2 licenses issued; Total of 1 license in use)


  "keyshot_vr" v6.0, vendor: LUXION
  floating license

    Luxion BrunosiMac (v6.0) (BrunosiMac.local/27000 201), start Thu 3/23 15:36

BrunosiMac:FlexLM Luxion$
```

7. To ensure that your license service starts every time that you restart your computer, open your System Preferences.app and go to Users&Groups > Login Items. Click the Add button (+) and browse to your Applications/FlexLM folder. Select the FlexLMAutostart.app and click Add.

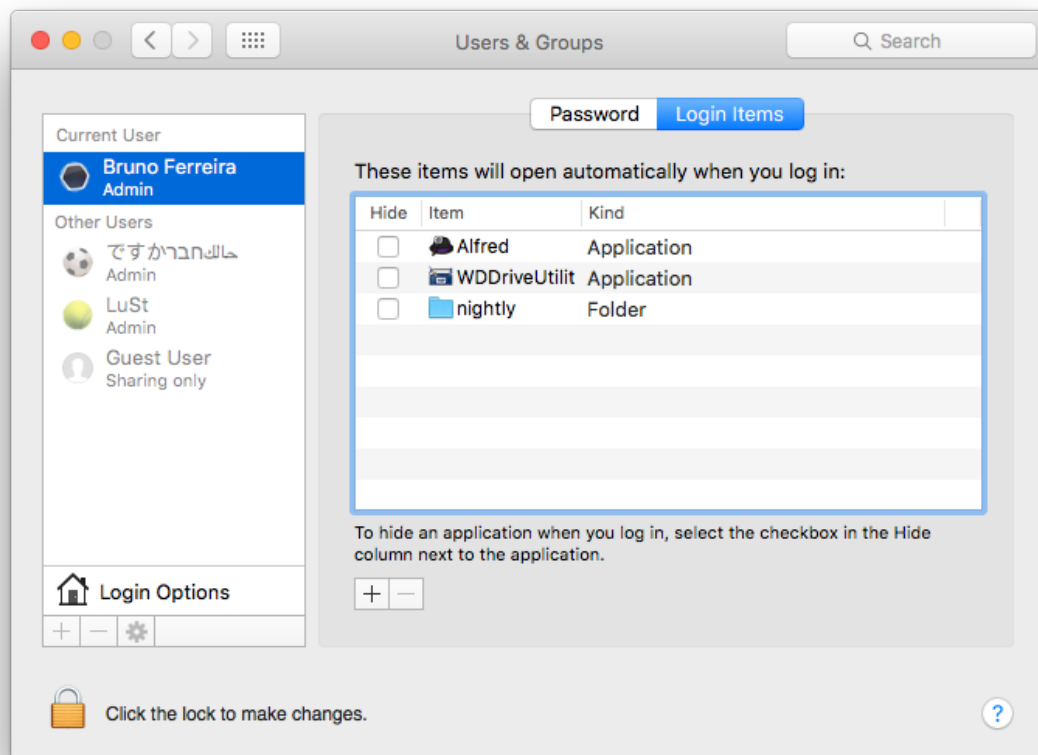

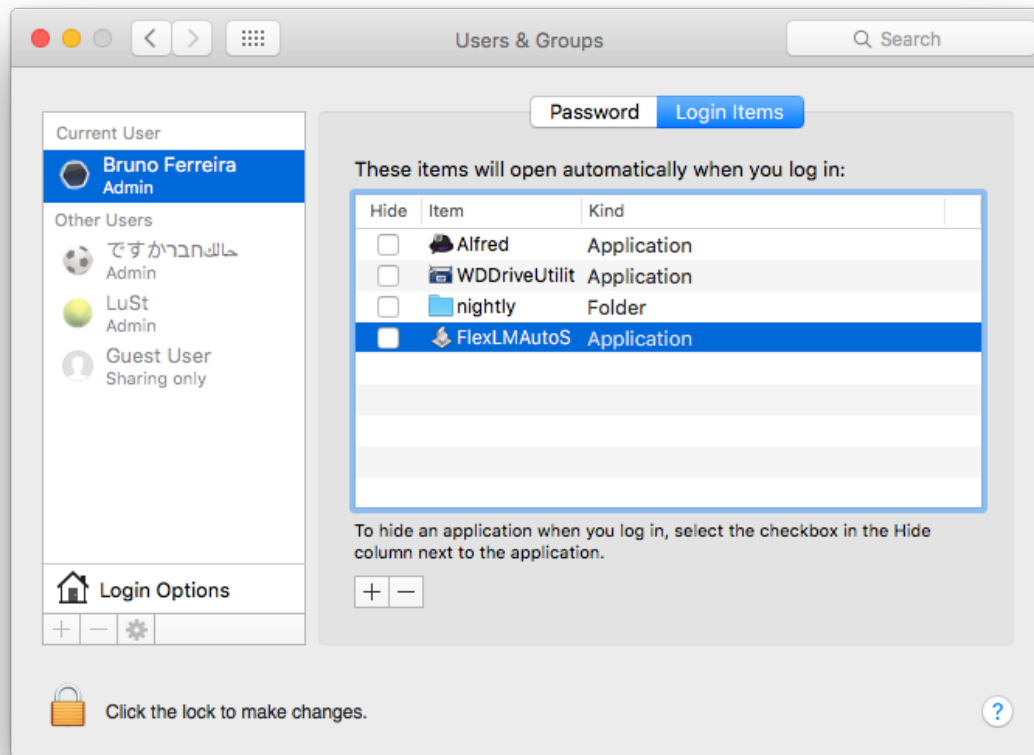

8. Close System Preferences.app. You can now launch KeyShot and point it to the server as outlined in the [KeyShot Pro Floating Installation](#).

Replace License File

If you've received a new license file from us, you can easily replace the old license and update the license server.

How To Replace The License File:

1. Save the license file to your computer.
2. Launch the Luxion License Server
3. Go to the _Install License_ tab
4. Click *New License*
5. Browse to the License file.
 - The Server should now Load the License file and restart.
 - If you changed the port number in the original file, Click *Set Server Ports* and make sure the ports are set.

Client computers will be able to connect as usual.

Technical Tip: If results are not consistent with the above, please reference other possible solutions in the [troubleshooting guide](#). You may also contact Luxion Customer Support at support@luxion.com for assistance.

Floating License Definitions

Floating License: This is a type of license that can be accessed by various computer systems. The actual license file is saved on the license server system. Your license file is an encoded text file that tells the license server which port to use, how many seats are available for checkout, and when will the license expire.

Seat: The number of seats in a license file tells the license server how many client computers can check out the floating license at the same time. This number is displayed and encoded in the license file.

License Server: The computer that hosts and manages the license file. Any Windows PC or Mac computer can be a license server. We recommend that you select a desktop computer in your office network that your design team can access during regular business hours or later if needed.

Client: In this manual, we refer to any computer in which KeyShot Pro Floating is installed as the client. If KeyShot Pro Floating is installed on your license server, then your license server computer is also a client.

Server Host Name: This is the name of your computer as listed under your computer network. The host name is a label used for identification.

Server MAC Address: Your computer has various ways to connect to other computers on your network and to the internet. The most common connections are the ethernet adapter and the wireless adapter. Each of your adapters has a unique physical address also known as the mac address. The KeyShot Pro Floating license is tied to your server's MAC address.

Silent Install (PC)

You or your IT department may wish to run the KeyShot Installer for PC* as a silent installation. The KeyShot installer takes the following arguments:

Commands

/S – for a silent installation.

/AllUsers – installs for all users with shortcuts in start menu.

/USERNAME=somepath – changes the destination folder for the KeyShot Resources folder.

/FLEXLM=27000@myserver – set the FlexLM server's port and hostname. Only use this command if you have a [floating license](#) for multiple computers.

/D=C:\Program Files\KeyShot 8 – set the program files destination. This must be placed at the end of the command line.

/FloatingFeature=feature – set the feature to check out (if more than one is available): keyshot2, keyshot_enterprise, or keyshot_base.

/NO_AUTOUPDATE – disable updates.

/NO_CLOUD – disable KeyShot Cloud Library.

Examples

KeyShot HD/Pro

keyshot_w64_8.x.x.exe /S /USERNAME=C:\Users\Luxion\Documents /D=C:\Program Files\KeyShot 8

KeyShot Pro Floating

keyshot_w64_8.x.x.exe /S /USERNAME=C:\Users\Luxion\Documents /FLEXLM=27000@myserver /D=C:\Program Files\KeyShot 8

Unattended Uninstall

C:\Program Files\KeyShot 8\uninst.exe /S _?=C:\Program Files\KeyShot 8

*Silent install commands for Mac are currently not available.

User Interface

This section provides information on the KeyShot user interface and its elements (windows, menus and commands). Its purpose is to explain

1. the location of elements
2. purpose of elements
3. menus and commands
4. customization.

Information on the function of elements and how they work are located in the latter sections.

KeyShot is a single interface built around the Real-time View of your scene. The docking windows allow scene authoring capabilities while the floating windows contain setting and output options.

You can customize and save the interface to suit your workflow with [Workspaces](#).

Main Interface	Docking Windows	Floating Windows	Extras
• Real-time View • Main Menu • Toolbar • Ribbon	• Library Window • Project Window • Animation Timeline • Geometry View • Material Templates • Studios • Cloud Library	• Preferences • Render • Output Window • HDRI Editor • Material Graph (Pro Only)	• Welcome Window • Hotkeys • Multi-Touch • Workspaces

Real-time View

Real-time View

The KeyShot *Real-time View* is the main viewport in the KeyShot user interface. All real-time rendering of your 3D model will occur here. You can navigate your scene using the camera controls, multi-select objects and right-click directly on your model or in the area around it to view more options.

Heads Up Display

For information concerning the *Real-time View* you can turn on the *Heads-Up Display* via the Main Menu under *View > Heads-Up Display*.

The Heads-Up Display will be located in the top left corner of the *Real-time View*. It shows frames per second, time and number of samples the *Real-time View* has been rendering, the amount of triangles and NURBS in the scene, the *Real-time View* resolution, and the current focal length of the camera.

Coordinate Legend

To help orientate in the *Real-time View* you can turn on the *Coordinate Legend*. This will show the X,Y and Z axis of the current view. Turn on the *Coordinate Legend* via the Main Menu under *View > Coordinate Legend*.


Docking windows

Windows with resources and editing options (see which [here](#)) can be docked inside the Real-time View. You can dock windows on the sides and in the bottom of the view - and in multiple columns/rows if desired. to dock a window drag it by the title-bar towards the middle of the edge you want to dock it to, when a grey docking area is expanded, simply drop the window there. To undock drag the window, by the title bar, away from the dock area.

The Real-time View will respect the resolution/aspect ratio set in the [Image tab](#) and docked windows can only be resized accordingly.

On this page

- [Real-time View](#)
 - [Heads Up Display](#)
 - [Coordinate Legend](#)
 - [Docking windows](#)

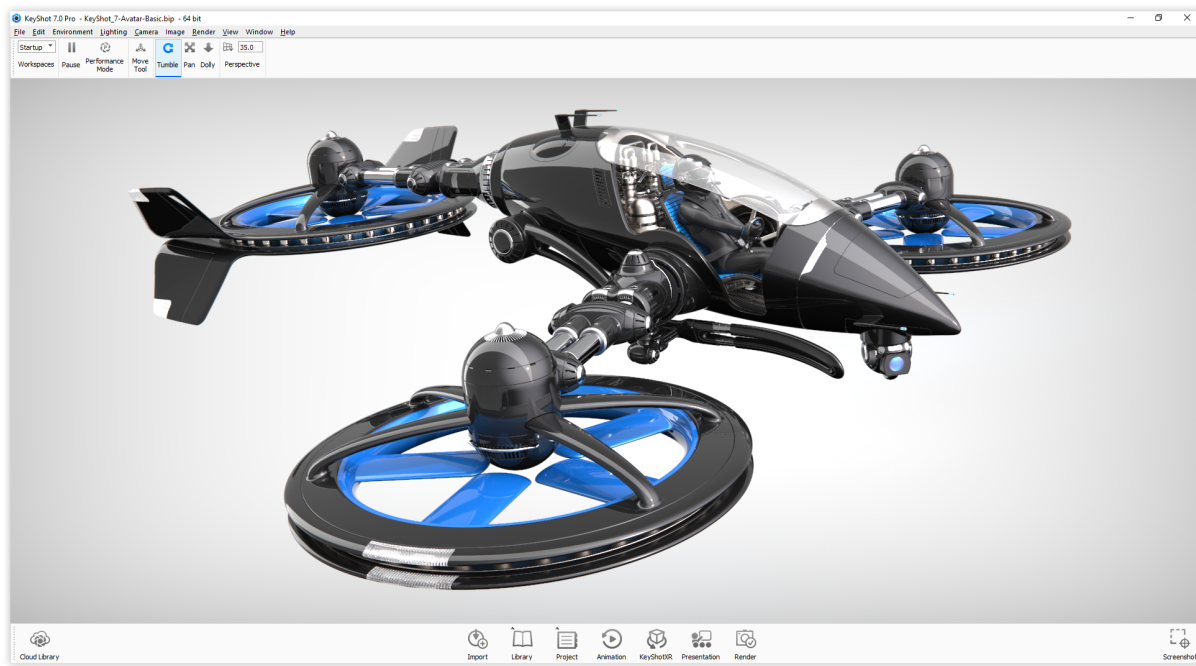

Main Menu

File

- **New...**
Open a new blank scene in KeyShot.
- **Import...**
Import a 3D file into an open or new scene. See Importing section for more details.
- **Open...**
This will open a KeyShot scene, or opens the import panel.
- **Open Recent**
KeyShot lists the last 10 scenes that were opened/saved so you can quickly open them.
- **Save**
Save the currently open scene in KeyShot (.bip).
- **Save As...**
Save the current scene in Keyshot (.bip) with the option to change the name of the file.
- **Save Package...**
Save a KeyShot Package (.ksp) which includes the model, materials, environments, textures, cameras, and backplates used in a given scene.
It is very important to use this saving method when sharing or moving a scene across different computers.
- **Save for KeyShot Viewer...**
Save a KeyShot Package (.ksp) for viewing in KeyShot Viewer. The file can be Password protected and you can choose to show the KeyShot logo and/or watermark.
- **Save Active Model Sets...**
Save only the Model Set(s) displayed in order to share Model Sets with non-Pro users.
- **Revisions Manager...**
Opens [Revision Manager](#) to preview, revert to or delete revisions. This is not enabled by default. To enable the Revision Manager, enable *Backup Revisions* under *Edit > Preferences > General (PC)* or *KeyShot > Preferences > General (Mac)*.
- **Export (Pro only)**
Export model file to OBJ, FBX, GLTF, STL, and ZPR file formats.
- **Connect to Onshape...**
Launch the Onshape integration dialog. Plugin and Onshape and account are required. The plugin can be downloaded [here](#).
- **Exit** (PC only - On Mac *Quit* is located under *KeyShot* in the Main Menu)
Quit and leave KeyShot.

Edit

- **Undo**
Undo previous actions.
- **Redo**
Redo an action that was undone.
- **Add Geometry**
Add pre-installed primitives into your scene. You can also place commonly used models into the “Models” folder in your KeyShot Resources directory.
- **Edit Geometry**
Opens the Geometry Editor. See [Geometry Editor](#) for more details.
- **Clear Geometry**
Clears all geometry in the scene.

On this page

- [File](#)
- [Edit](#)
- [Environment](#)
- [Lighting](#)
- [Camera](#)
- [Image](#)
- [Render](#)
- [View](#)
- [Window](#)
- [Help](#)

- **Set Scene Units**
Change the set units used in the scene. For accurate results, use the same units the model was created in.
- **Preferences** (PC only - On Mac *Preferences* are located under *KeyShot* in the Main Menu)
Set KeyShot preferences. See [Preferences](#) for more details.

Environment

- **Background**
Toggle background mode between Lighting Environment, Color, and Backplate image.
- **Ground Shadows**
Toggle Ground Shadows on and off.
- **Occlusion Ground Shadows**
Toggle Occlusion Ground Shadows on and off. Ground Shadows must be enabled for this option to be available.
- **Ground Reflections**
Toggle Ground Reflections on and off.
- **Flatten Ground**
Toggle Flatten Ground on and off.

Lighting

- **Performance Mode**
Toggle the performance mode on/off.
- **Basic, Product, Interior, Jewelry, Custom**
Choose a lighting preset that best suits your scene. if you have a created a custom preset, this option becomes available under *Custom*.
- **Self Shadows, Global Illumination, Ground Illumination, Caustics, Interior Mode**
Toggle these settings on/off. See [Lighting](#) for more information.

Camera

- **Cameras**
Choose a saved camera. Cameras that are saved from your list of saved cameras is populated here.
- **Lock Camera**
Lock the camera in the Real-time View.
- **Add Camera**
Add a Camera to your saved camera list.
- **Tumble/Pan/Dolly**
Toggle the default left mouse button action.
- **Perspective/Orthographic/Shift**
Toggle camera lens settings. See [Lens Settings](#) for more information.
- **Standard Views**
Choose from the preset orthographic camera views.
- **Stay Above Ground**
Toggle camera to stay above ground.
- **Grid**
Enable grid.
- **Ground Grid**
Enable ground grid.

- **Match Backplate Perspective**
Enable the match backplate tool.
- **Walkthrough Mode**
Adds a new camera and enables *Real-time View* navigation controls.
- **Enable VR**
When you have a VR headset connected to your computer the *Enable VR* option enables the *Head Mounted Display* option in the *Stereo* section of the *Project, Camera* tab and adds a *Panoramic* camera to the *Camera List*. See the [Virtual Reality](#) section to learn more.
- **Adaptive Performance mode**
Toggle the use of performance mode if FPS is lower than 20 in the *Real-time View*.

Image

- **Resolution Presets**
Select from a list of *Real-time View* Resolution Presets.
- **Lock Aspect**
Toggle Lock Aspect of the *Real-time View*.
- **Lock Resolution**
Toggle Lock Resolution of the *Real-time View*.

Render

- **Pause Real-time Render**
Toggle pause of the *Real-time View*.
- **Render NURBS**
Toggle on/off the display of NURBS in the *Real-time View*.
- **Motion Blur**
Toggle on/off the display of Motion Blur when animations are present in the scene.
- **Save Screenshot**
Create an image file of the current *Real-time View*.
- **Add to Queue**
Create a render job in the *Render Queue* using the current Render Options.
- **Render**
Open the *Render Options* window.

View

- **Model Sets**
Cycle Model Sets or select a specific Model Set from the list.
- **Show Fullscreen**
Toggle fullscreen mode.
- **Presentation Mode**
Toggle presentation mode.
- **Retina mode** (Mac only)
Toggle Retina mode.
- **Heads-Up Display**
Hide or show the Heads-Up Display which contains frames per second, time and number of samples the *Real-time View* has been rendering, the amount of triangles and NURBS in the scene, the *Real-time View* resolution, and the

- current focal length of the camera.
- **Show Coordinate Legend**
Hide or show the coordinate legend on the lower left corner of the real-time render window.
- **Selection Outlines**
Toggle selection outlines to be shown.
- **Show Light Sources**
Hide or show physical light sources.

Window

- **Toolbar**
Hide or show the *Toolbar*.
- **Ribbon**
Hide or show the *Ribbon*.
- **Cloud Library...**
Hide or show the *Cloud Library* window.
- **Library**
Hide or show the *Library* window.
- **Project**
Hide or show the *Project* window.
- **Animation...**
Hide or show the *Animation* window.
- **KeyShotXR...**
Open the *KeyShotXR* wizard (only available with applicable licenses).
- **Show Geometry View**
Hide or show the *Geometry View* window.
- **Material Templates...**
Hide or show the *Material Templates* window.
- **Studios**
Hide or show the *Studios* window.
- **Configurator Wizard**
Hide or show the *Configurator Wizard*.
- **Scripting Console...**
Hide or show the *Scripting* console window.
- **Enable Docking**
Toggle to allow window docking in the Real-time View.
- **Dock Windows**
Auto-docks all open windows to default locations.
- **Restore Tab Order**
Restores the default tab order for the Library and Project windows.

Help

- **Help...**
Loads <https://help.keyshot.com/> for quick access to the Luxion Support staff, FAQs, Troubleshooting and more.
- **Manual...**
Loads the KeyShot online manual, which also contains links to download the PDF manual.
- **Hotkeys Overview...**
Displays the KeyShot hotkeys panel (or toggle off/on using the *K-key*).

- **Welcome Dialog...**
Displays the Welcome Window for access to the latest learning and 'What's New' content along with recent and demo scenes.
- **Learning**
Opens the "Keyshot Learning" page for tutorials, webinars and quick tips.
- **Register License...** (PC only - On Mac *Register License...* is located under *KeyShot* in the Main Menu)
Opens the KeyShot license registration window.
- **Activate KeyShotXR...**
If you have purchased the KeyShotXR add-on separately, click here to activate it.
- **Deactivate License on this Computer...** (PC only - On Mac *Deactivate License on this Computer...* is located under *KeyShot* in the Main Menu)
Deactivate your license so it can be used on a different computer.
- **Show License Information...** (PC only - On Mac *Show License information...* is located under *KeyShot* in the Main Menu)
Shows KeyShot version and active licenses.
- **Disclaimers...**
Opens disclaimers pertaining to KeyShot partners.
- **Check for Updates...** (PC only - On Mac *Check for Updates...* is located under *KeyShot* in the Main Menu)
Checks online for the latest version of KeyShot. Requires an internet connection.
- **Log...**
Opens log window to view the source of any errors.
- **About...** (PC only - On Mac *About...* is located under *KeyShot* in the Main Menu)
Displays the KeyShot About window, including KeyShot version number and link to Disclaimers


Related pages:

There are no related labels.

Toolbar

KeyShot Toolbar

The Toolbar provides quick and easy access to the most common windows and features in KeyShot. The center grouping of icons provides a general order of operations when working in KeyShot from Import to Render. You can right-click on the Toolbar for icon size options and the ability to disable text. Click and drag on the handle on the left side of the Toolbar to tear it off from the main window to leave it floating or to dock along the top or either side.



Cloud Library

Opens the Cloud Library window. See [Cloud Library](#) for more details.

Import

Opens the browse to file dialog to import scenes and 3D data into KeyShot. See [Working With Models](#) for more details.

Library

Opens the Library window. See [Library Window](#) section for more details.

Project

Opens the Project window. See [Project Window](#) for more details.

Animation

Opens the Animation Timeline and Animation Properties window. See [Animation Timeline](#) for more details.

KeyShotXR

Opens the KeyShotXR Wizard. See [KeyShotXR](#) for more details.

Presentation

Enters full-screen Presentation Mode. This button is only displayed on the Toolbar for KeyShot Pro users, if the Configurator has been set up in the scene. See [Configurator](#) for more details.

Render

Opens the Render window. See [Render](#) for more details.


Screenshot

Takes a Screenshot of the real-time view and saves it to your Renderings [resources folder](#).

Ribbon

The KeyShot Ribbon

The Ribbon provides quick access to commonly used settings, tools, commands, and windows in KeyShot.

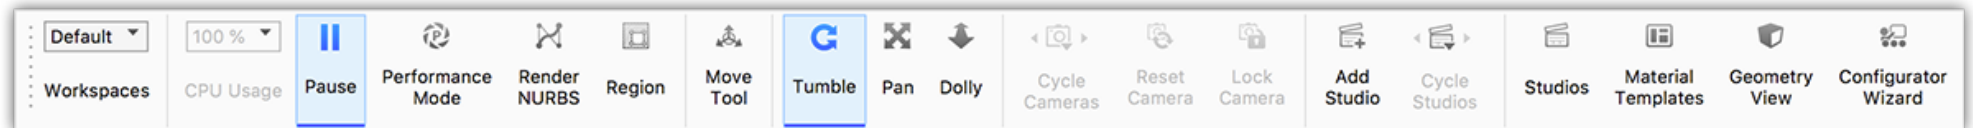

Workspaces

Select a predefined [Workspace](#), create and manager your own, or select between the Light and Dark theme interface.

CPU Usage

Select the number of cores used for the real-time render window.

Pause

Pauses real-time rendering.

Performance Mode

Toggle on to lower real-time render settings for faster performance. Performance Mode is also accessible via the Lighting tab.

NURBS Mode (Pro Only)

Enables NURBS Data to be rendered in the realtime rendering window.

Region (Pro Only)

Enables Region rendering.

Move Tool

Enables the Move Tool and prompts to make a selection if nothing is already selected.

Tumble, Pan, Dolly Camera

Select the default left mouse button behavior. This is especially helpful when working on a laptop with only a trackpad.

Perspective

Quick access to the Camera Perspective value.

Add Camera

Add a new Camera to your saved Camera list.

Cycle Cameras

Cycle through saved Cameras.

Reset Camera

Reset the current Camera to its saved state.

Lock Camera

Lock the properties of the current Camera.

Add Studio

Add a new Camera to your saved Camera list.

Cycle Studios

Cycle through saved Studios.

Studios

Show/hide the [Studios](#) window.

Material Templates

Show/hide the [Material Templates](#) window.

Geometry View

Show/hide the [Geometry View](#) window.

Configurator Wizard

Opens [Configurator Wizard](#).

Workspaces

Workspaces allow you to select preset user interface (UI) arrangements or save your own custom arrangements of the KeyShot UI to best suit the way you work. Workspaces remember window dock state, position and size, Library and Project tab order, tab visibility, torn-off tab state, Toolbar and Ribbon position and Ribbon icon visibility.

Using Workspaces

The *Ribbon* at the top of the KeyShot UI now contains a dropdown menu at the far left where you can select, add, and manage Workspaces. To create your own custom Workspace make adjustments to any of the items mentioned above, click the *Workspaces* dropdown and select *Add...* to launch a name entry field and save. To save changes to an existing Workspace click *Apply Changes...* To adjust display order, import, export, or delete Workspaces click *Manage...*

Theme Options

KeyShot has both light and dark theme options. From the *Workspace* dropdown, select *Light Theme* or *Dark Theme*.

On this page

- [Using Workspaces](#)
- [Theme Options](#)

Library Window

The KeyShot Library has stock materials, colors, textures, environments, and backplates that you can use in your scenes.

Files in the Library are stored locally on your computer and they are read from your KeyShot resources folder by default. To pull resources from a different folder, you can point to it from Keyshot [Preferences](#) > *Folders*. More Materials, Textures, Environments, and Backplates are available for download from the [Cloud Library](#).


In this section

- [Materials Tab](#)
- [Colors Tab](#)
- [Environments Tab](#)
- [Textures Tab](#)
- [Backplates Tab](#)
- [Favorites Tab](#)

Materials Tab

The *Materials* tab in located in the *Library* window and contains all the preset and saved materials in your library.

1. **Search**
Type in any keyword to search for a material by name.
2. **Add Folder**
Click this button to add custom material folders.
3. **Import**
Import a KMP material file.
4. **Refresh**
Refresh material list if any changes were made.
5. **Folder Tree**
Contains the folder structure of the material folders.
6. **Material Thumbnails**
Mat ball swatches of materials within the selected folder.
7. **List/Thumbnail Toggle**
Switch displaying the materials with thumbnails and in a list view.
8. **Zoom Slider**
Slide to change the size of the thumbnails. You can also use +/- to change in steps.
9. **Upload to Cloud Library**
Click this button to upload a custom material to the Cloud Library.
10. **Export**
Export a saved material as a KMP file.

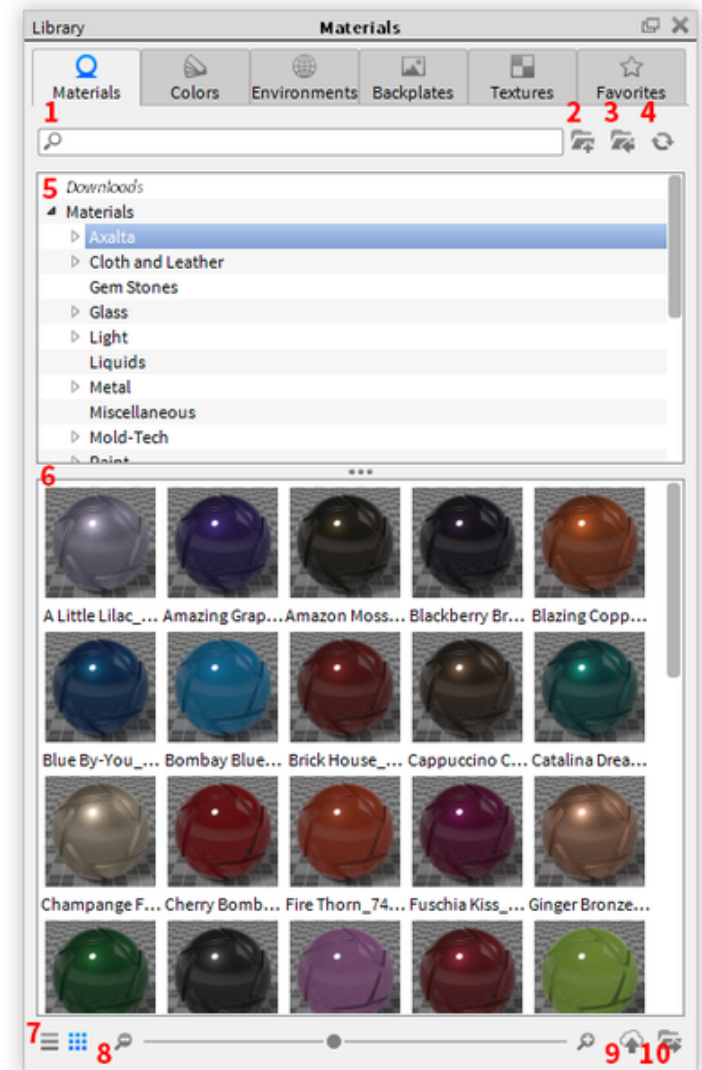


Colors Tab

The *Colors* tab contains all preset color libraries and saved colors.

1. **Search**
Type in any keyword to search for a color by name.
2. **Add Folder**
Click this button to add custom color folders.
3. **Import**
Import a KCP or CSV color file.
4. **Refresh**
Refresh color list if any changes were made.
5. **Color Search**
Opens color picker panel to search by closest color match.
6. **Folder Tree**
Contains the folder structure of the color folders. It contains folders for RAL and Pantone Color Libraries.
7. **Color Swatches**
Displays color swatches within the selected folder.
8. **List/Thumbnail Toggle**
Switch between displaying the color with thumbnails and in a list view.
9. **Zoom Slider**
Slide to change the size of the thumbnails. Use +/- to change in steps
10. **Export**
Export a KCP color file.


See the [Color Library](#) page for more info.

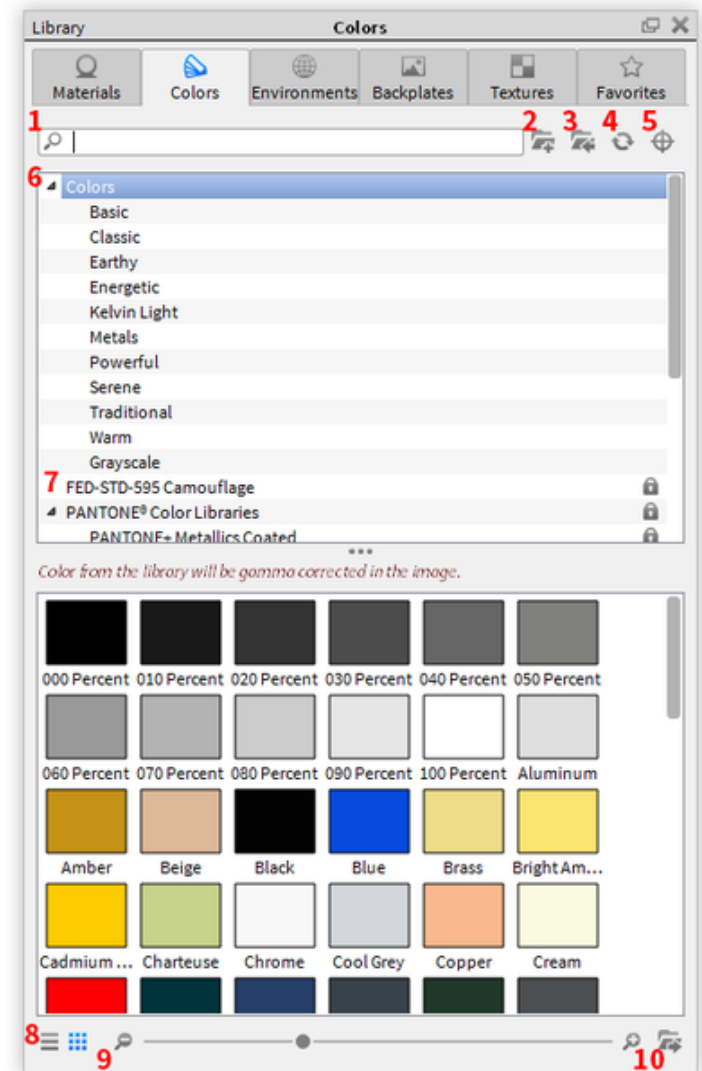

Environments Tab

The *Environments* tab contains all preset environments and any saved environments in your library.


1. **Search**
Type in any keyword to search for an environment by name.
2. **Add Folder**
Click this button to add custom environments folders.
3. **Import**
Import a HDR, HDZ, EXR, DDS file.
4. **Refresh**
Refresh environments list if any changes were made.
5. **Folder Tree**
Contains the folder structure of the environment folders.
6. **Environment Thumbnails**
Thumbnails of environments within the selected folder.
7. **List/Thumbnail Toggle**
Switch displaying the environments with thumbnails and a list view.
8. **Zoom Slider**
Slide to change the size of the thumbnails. Use +/- to change in steps.
9. **Upload to Cloud Library**
Click this button to upload a custom environment to the Cloud Library.
10. **Export**
Export environment file.

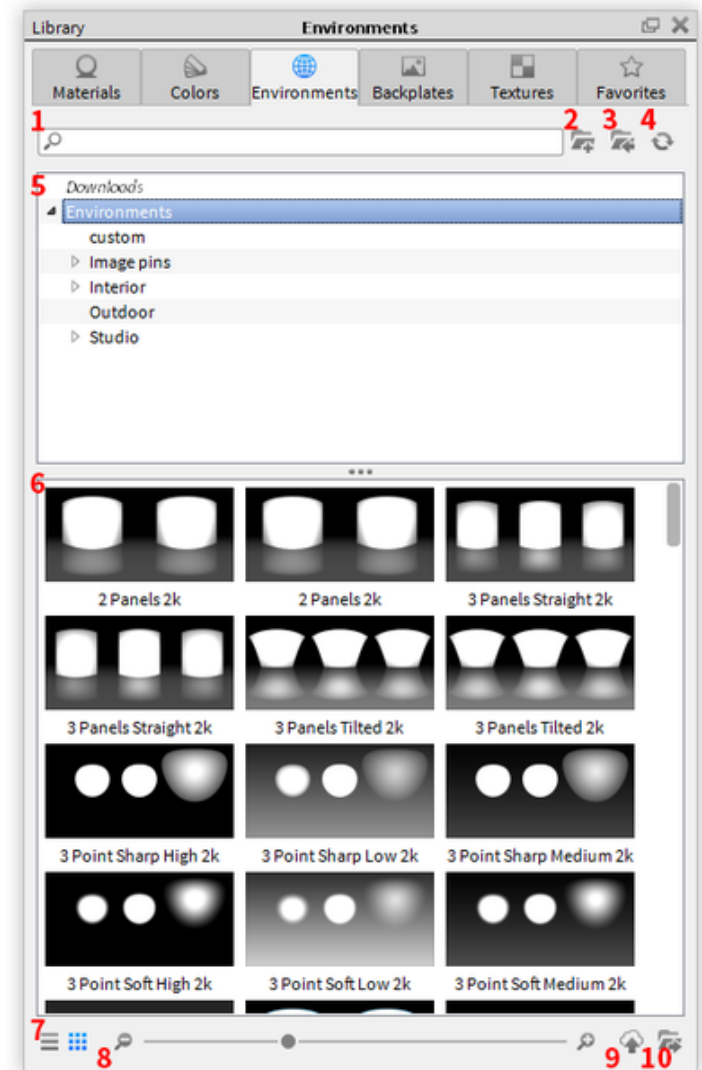

Textures Tab

The *Textures* tab contains all preset and saved textures in your library.


1. **Search**
Type in any keyword to search for a texture by name.
2. **Add Folder**
Click this button to add custom texture folders.
3. **Import**
Import an image file.
4. **Refresh**
Refresh texture list if any changes were made.
5. **Folder Tree**
Contains the folder structure of the texture folders.
6. **Texture Thumbnails**
Thumbnails of textures within the selected folder.
7. **List/Thumbnail Toggle**
Switch between displaying the textures with thumbnails, or a list view.
8. **Zoom Slider**
Slide to change the size of the thumbnails use +/- to change in steps.
9. **Upload to Cloud Library**
Click this button to upload a custom texture to the Cloud Library.
10. **Export**
Export an image file.

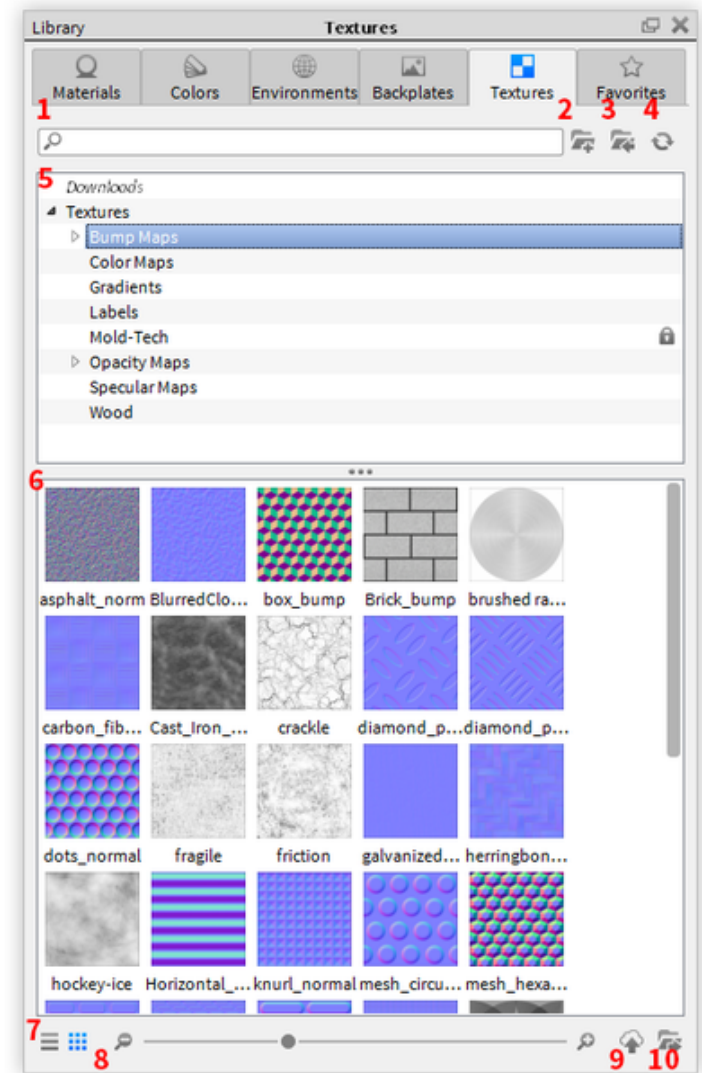

Backplates Tab

The *Backplates* tab contains all preset or saved backplates in your library.


1. **Search**
Type in any keyword to search for a backplate by name.
2. **Add Folder**
Click this button to add custom backplate folders.
3. **Import**
Import an image file.
4. **Refresh**
Refresh backplate list if any changes were made.
5. **Folder Tree**
Contains the folder structure of the backplate folders.
6. **Backplate Thumbnails**
Thumbnails of backplates within the selected folder.
7. **List/Thumbnail Toggle**
Switch between displaying the backplates with thumbnails, or a list view.
8. **Zoom Slider**
Slide to change the size of the thumbnails use +/- to change in steps.
9. **Upload to Cloud Library**
Click this button to upload a custom backplate to the Cloud Library.
10. **Export**
Export an image file.

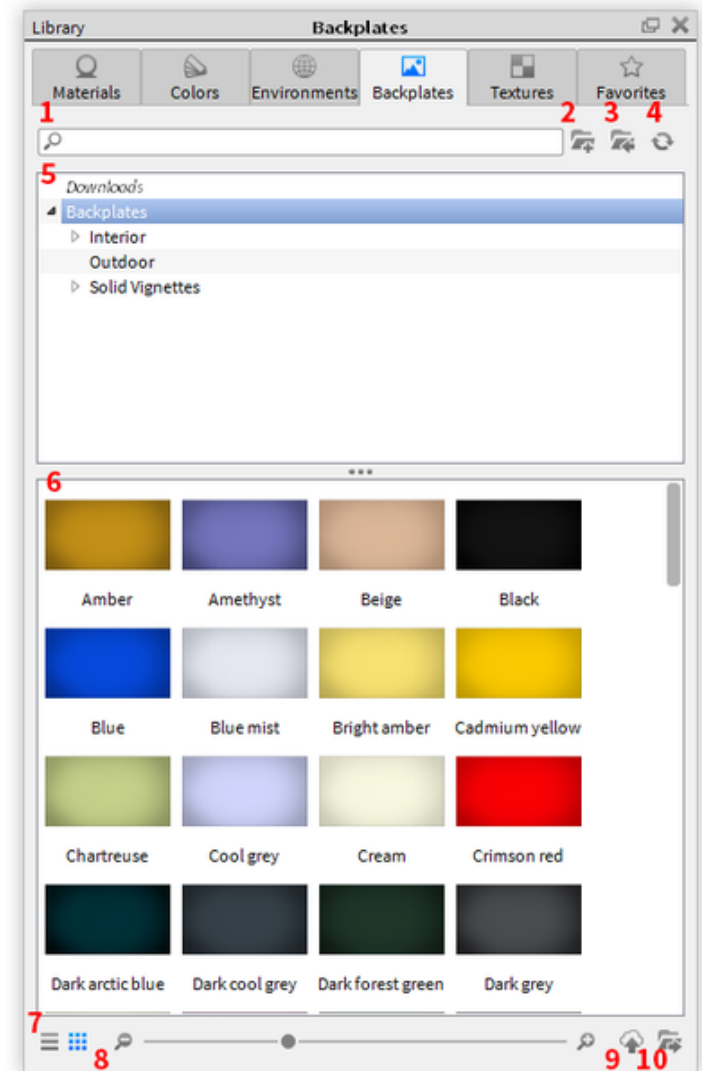

Favorites Tab

The *Favorites* tab allows you to organize commonly used resources into collections for a faster workflow. Right-click a resource in your library, select *Add to Favorite*, and select the folder you would like to add the resource to or select *Add to new Favorite* to create a new collection.

1. **Search**
Type in any keyword to search for a resource by name.
2. **Add Folder**
Click this button to add a favorites folders.
3. **Refresh**
Refresh favorites list if any changes were made.
4. **Folder Tree**
Contains the folder structure of the favorites folders. Each favorites folder contains categories for backplates, colors, environments, materials, and textures.
5. **Favorites Thumbnails**
Thumbnails of resources within the selected folder.
6. **List/Thumbnail Toggle**
Switch between displaying the favorites with thumbnails, or a list view.
7. **Zoom Slider**
Slide to change the size of the thumbnails use +/- to change in steps.

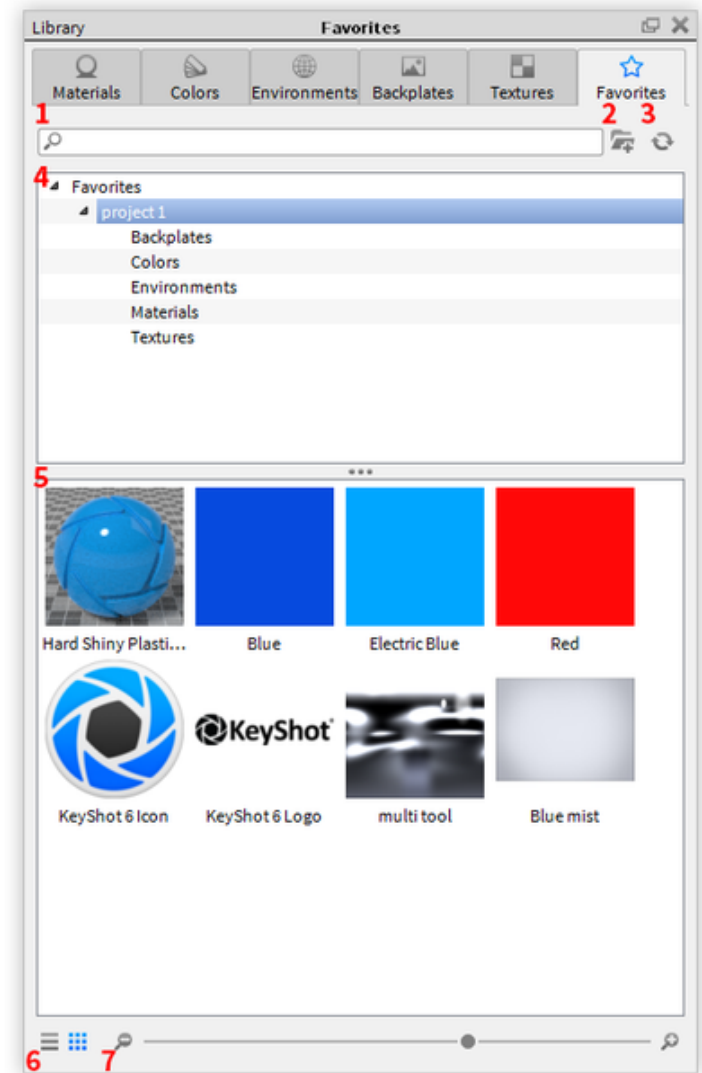

Project Window

The *Project* window contains all the setup and setting for everything in your scene, organized into six tabs: *Scene*, *Material*, *Environment*, *Lighting*, *Camera* and *Image*.

You can show/hide the Project window via the Toolbar or with the Space bar.

In this section

- [Scene Tab](#)
- [Material Tab](#)
- [Environment Tab](#)
- [Lighting Tab](#)
- [Camera Tab](#)
- [Image Tab](#)

Scene Tab

The *Scene* tab contains all the items in your scene:

1. Scene tree

The hierarchy of elements in your scene, Models > Groups > Parts, Animations (Pro Only) and Cameras.
See [Working With Models > Scene Tree](#) for more details.

2. Model Sets (Pro only)

With Model Sets you can have several independent Scene Tree variations within your file, making it easier to handle product variations.
See [Working With Models > Model Sets](#) for more detail.

3. Properties


Properties of the currently highlighted Model Set or item in the Scene Tree.

4. Position

Here you can set the size/position of the selected Model, Group or Part.
Also see [Working With Models > Moving Models and Parts](#).

5. Materials

this is the *In-Project library* which lists all materials in the current scene.

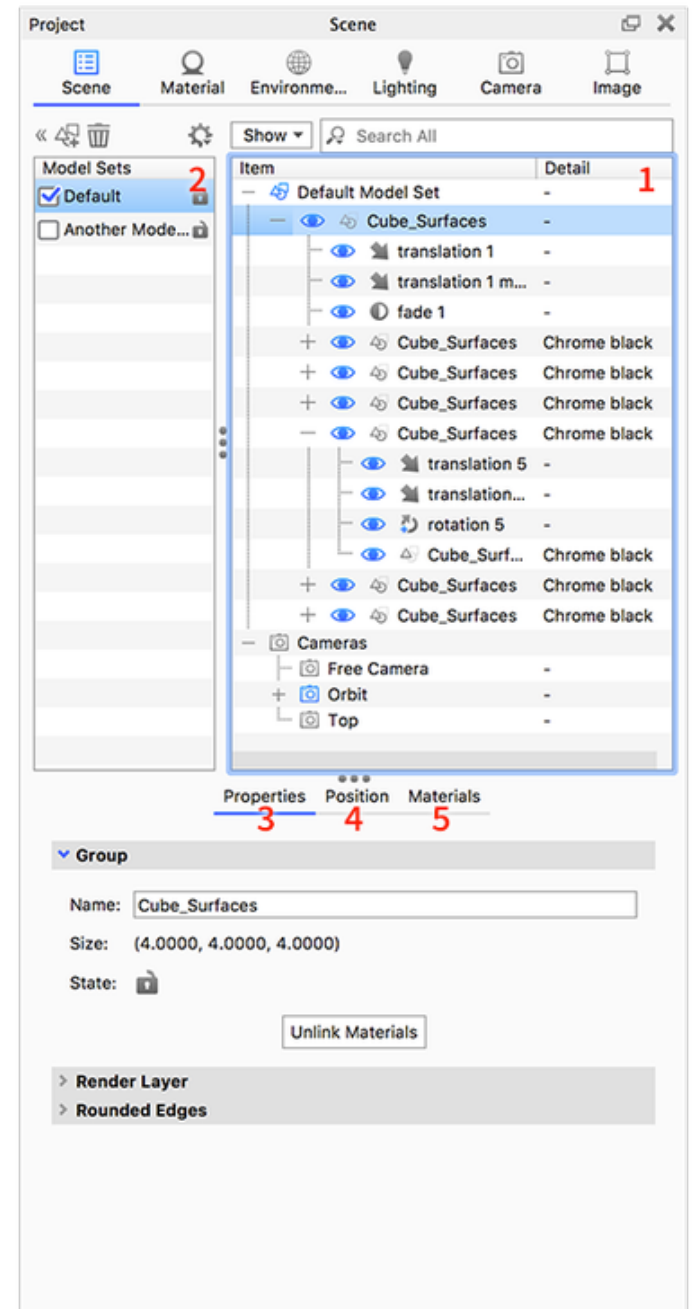

Material Tab

The *Material* tab is where you can edit the properties of your material such as changing the roughness, adding textures or labels.

1. Material Name

The name of the material as it appears in the *In-Project library* - if the project has multiple instances of the same material (unlinked) a number will be appended to the materials.

2. Save

Saves a copy of the material in the *Material Library*

3. Preview

Preview of the current material. The current material can be replaced by dragging another material from the *Material Library* onto the preview.

4. Material Graph (Pro Only)

The Material Graph opens in a separate window and displays materials, textures, labels and more as nodes in a graph view to visualize connections and relationships within complex materials. See the [Material Graph](#) section for more details.

5. Multi-Material (Pro Only)

Any material can be turned into a Multi-Material to facilitate non-destructive material swapping, variations or color studies. The Multi-Material allows you to cycle through a variety of materials within a single "container" material. See [Multi-Materials](#) section for more details.

6. Type

Here you can change the type of material on the selected part. See [Material Types](#) for description of the types available. When changing material types KeyShot will transfer any properties that can be translated between the types.

7. Properties/Textures/Labels

Each type of material has a set of [properties](#) that can be adjusted as well as the option to add [labels](#) and [textures](#).


The texture icon  denotes settings that are able to have textures applied.

8. In-Project Library

Lists all materials in the current scene. See the [In-Project Library](#) section for more details.

9. Material View

Tree-view showing all Labels/textures ect. (nodes) of the current material.

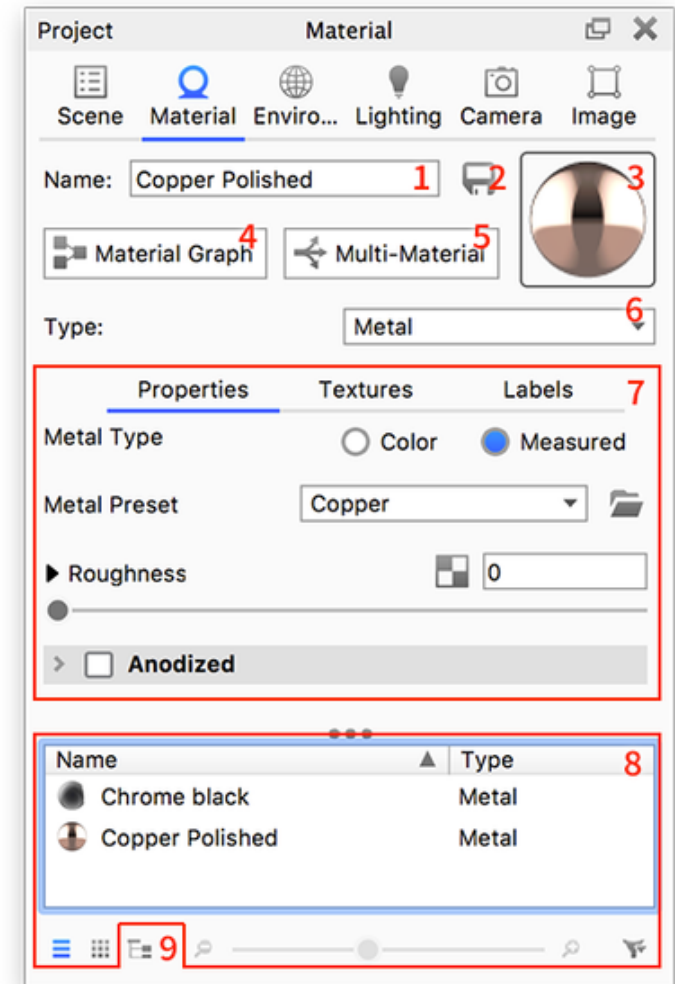

Environment Tab

The *Environment* tab is located in the *Project* window and is where you can add and edit the HDR lighting of your scene as well as the background and ground properties.

1. Environment List

With the *Environment List* you can set up and easily toggle between multiple environments in your project.

2. HDRI Preview

Preview of the HDRI. In the Pro version light pins can be adjusted here as well as in the HDRI Editor Canvas


3. Settings

The *Settings* tab located below the *Environment List* and HDRI preview allows you to control the properties of the selected Environment.

See [Adjusting Environments](#) for more details.

4. HDRI Editor **(PRO)**

The *HDRI Editor* tab located below the *Environment List* and HDRI preview allows you to edit the selected HDRI, add light pins and change background options. See [HDRI Editor](#) for more details.

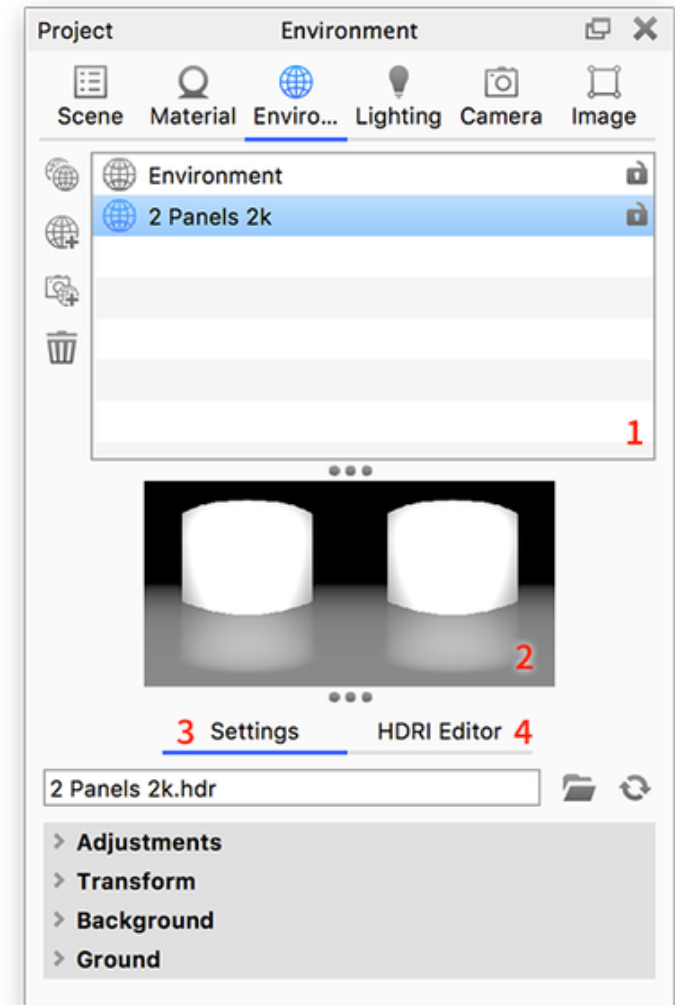

Lighting Tab

In the *Lighting tab* you can control the interpretation of lighting in your scene. The actual light sources are set up via [Lighting Environments](#) and [Light Source materials](#).

1. Lighting Presets

KeyShot comes with 5 *Lighting Presets* which make applying global light settings faster. You can find the description of each preset in the [Lighting](#) Section


2. Custom

Here you can access your own custom presets.

To add a new preset, adjust the settings, select the '+' symbol.

3. Lighting settings

This allows complete control over lighting options. Learn more about the individual settings on the [Custom Lighting Preset](#) page.

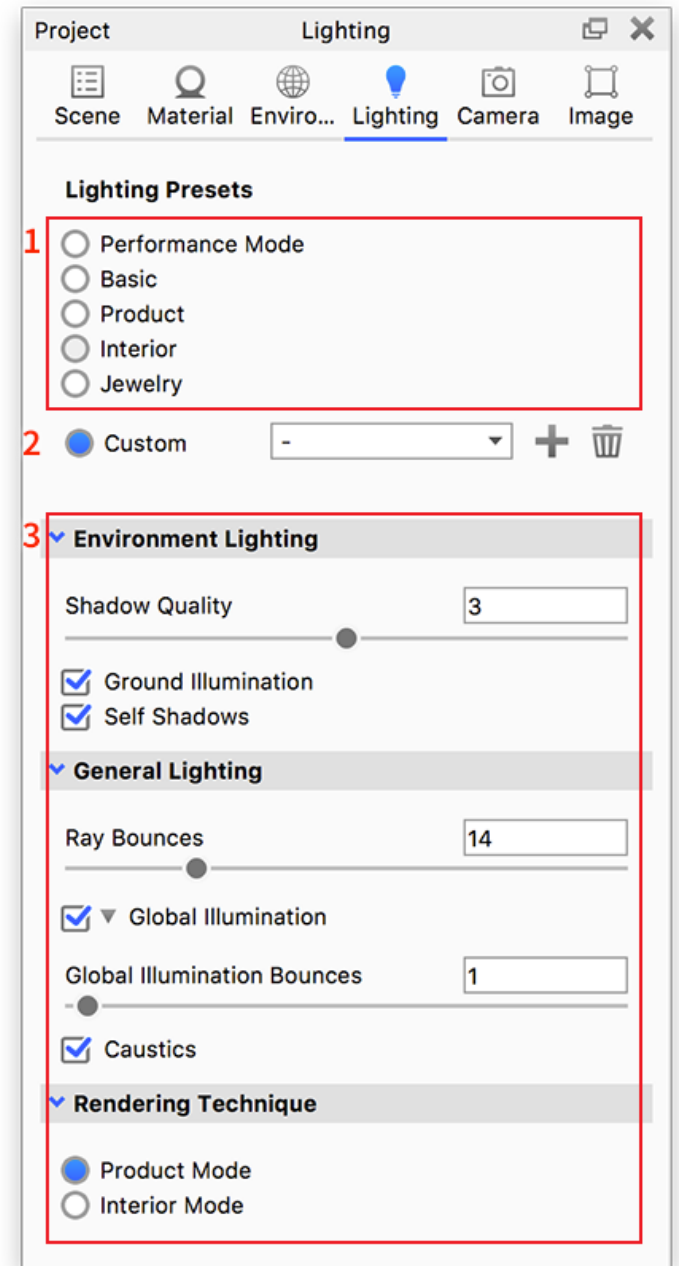

Camera Tab

The *Camera* tab is used to create cameras to capture the desired area of your project as well as various effects to enhance your camera view.

1. Camera List

With the Camera List you can set up/save multiple cameras in your scene. This facilitates cameras to be re-used, modified, animated or used in [Studios](#).

In the camera list, the *Free Camera* is always available and cannot be locked or overwritten, it can always be selected and remains independent of camera animations.

Go to the [Camera List](#) section for more details.

2. Position and Orientation

While the camera position can be changed by clicking and dragging the scene, this section will give you a more precise way of positioning the camera and allows you to set the camera target.

See the [Position and Orientation](#) section to learn more.

3. Lens Settings

As the title indicates, this section allows you to change the camera lens settings.

- [Perspective](#)
- [Orthographic](#)
- [Shift](#)
- [Panoramic \(pro only\)](#)


4. Stereo

The *Stereo* mode will allow you to either render a VR-ready image that can be viewed through a head-mounted VR display or to see the scene in real-time through a VR headset such as the Oculus Rift or the HTC vive. See the [Stereo \(VR\)](#) page and the [Virtual Reality](#) section for more information.

5. Depth of Field

Depth of Field allows you to set the focus distance and the f-stop of the camera just like you would with a regular camera.

See the [Depth of Field](#) section for more details

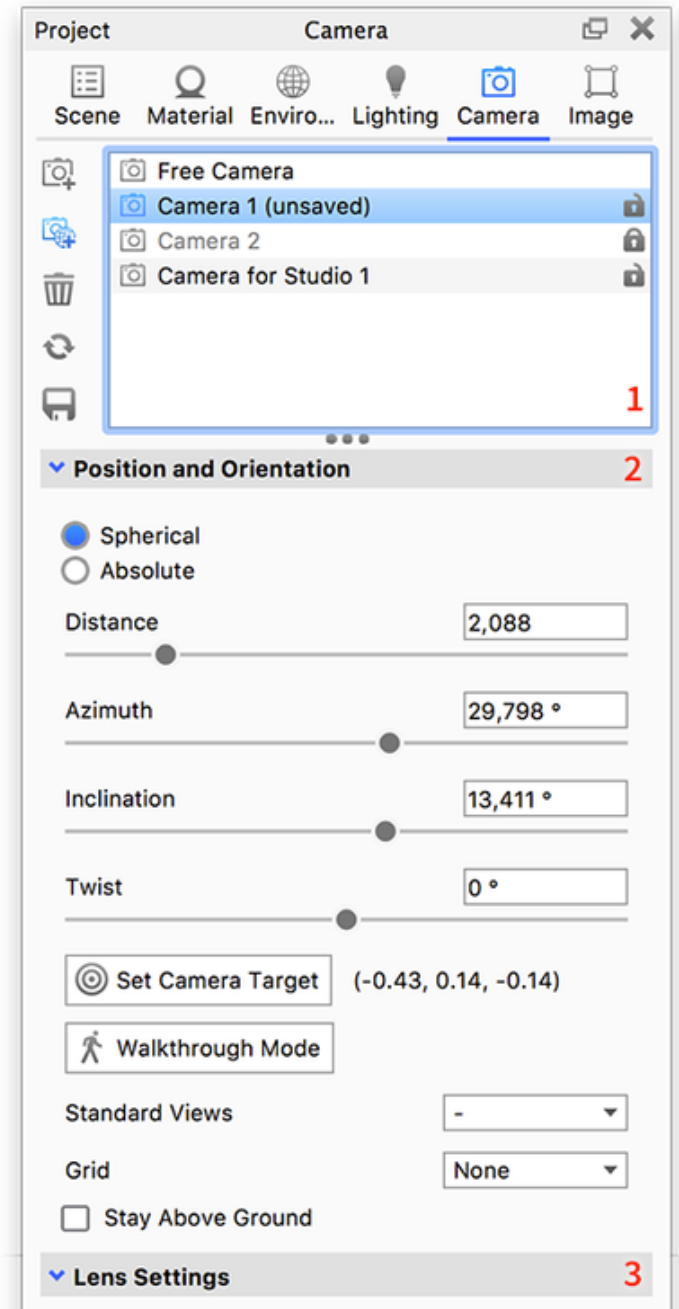

- ☒ Perspective
- ☐ Orthographic
- ☐ Shift
- ☐ Panoramic

 Match Perspective

Perspective / Focal Length

Field of View

☐ Ground Grid

▼ ☐ Stereo 4

Mode ☐ Over-under ☐ Side-by-side

Eye Distance

 Head-Mounted Display ▼

▼ ☐ Depth of Field 5

 Select Focal Point

Focus Distance

F-stop

Image Tab

Resolution

The Resolution can be set in specific pixels or with a fixed ratio. You can also choose from a number of standard presets - and even add your own presets to suit your workflow.

The [Resolution](#) page offers more details.

Image Styles

Image Style List

The Image Style List allows you to create multiple Image Styles in the same scene.



Add Image Style - Adds a new Image Style to the list.



Duplicate Image Style - Adds a copy of the current Image Style to the list.



Delete Image Style - Deletes the current Image Style.

Image Style type



Basic - Almost identical to the Image Adjustments and Image Effects options in previous versions of KeyShot. If you open a legacy scene with Image Adjustments/Effects they will be added as a Basic Image Style.



Photographic - Offers more versatile adjustments e.g via *Tone Mapping* and *Curves*. See the


Properties

This is where you set up the current Image Style - Learn more in the [Image Styles](#) section.

On this page:

- [Resolution](#)
- [Image Styles](#)
 - [Image Style List](#)
 - [Image Style type](#)
 - [Properties](#)

Note: In KeyShot 8 the Region Rendering settings have been moved from the *Image tab* to the *Ribbon* - see more on the [Render Region](#) page.

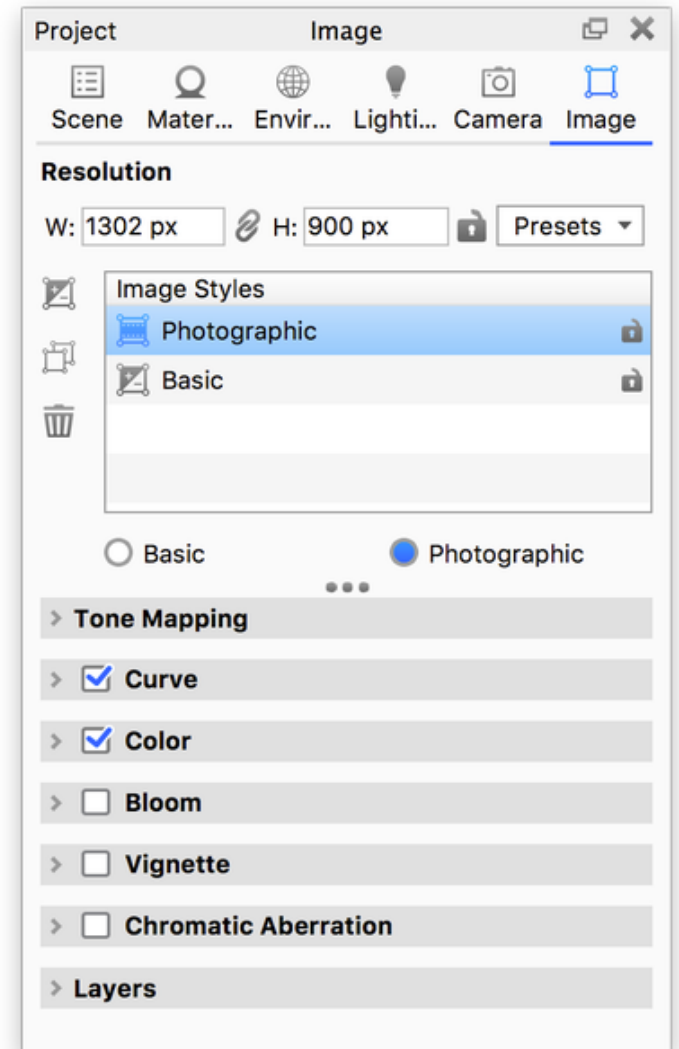

Animation Timeline

Animation Timeline Interface

1. **Time Stamp**

This will show where the preview line currently is on the timeline.

2. **Current Time Indicator Line**

This line is the marker for the where in the timeline the real-time render window is rendering from. When you play a real-time preview, this line will move with in time with the animation. Click and drag the line to scrub to a point in the animation you would like to preview.

3. **Start/End Markers (Work area)**

Use this to designate the actual animation to be rendered. The space between these markers is called the *Work Area*.

4. **Ruler**

This shows the timeline in the units chosen (seconds or frames.)

5. **Nodes**

Each animation is represented in the timeline as a colored bar called a “Node.” Most nodes can be selected at the ends and dragged to change the duration of the animation. Click on the body of the node to move along the timeline. Hold SHIFT while dragging to snap to another node.

- Green nodes - Part animations
- Blue nodes - Camera animations
- Red nodes - Material animations

6. **Folder Nodes**


Yellow Nodes are “Folder Nodes.” Changing the duration and location of a folder node affects all animation nodes contained within it.

7. **Node List**


This lists all animation nodes and folders. Use the check boxes to toggle the active state of the animation nodes.

In this section:

- [Animation Timeline Interface](#)
- [Timeline Toolbar](#)

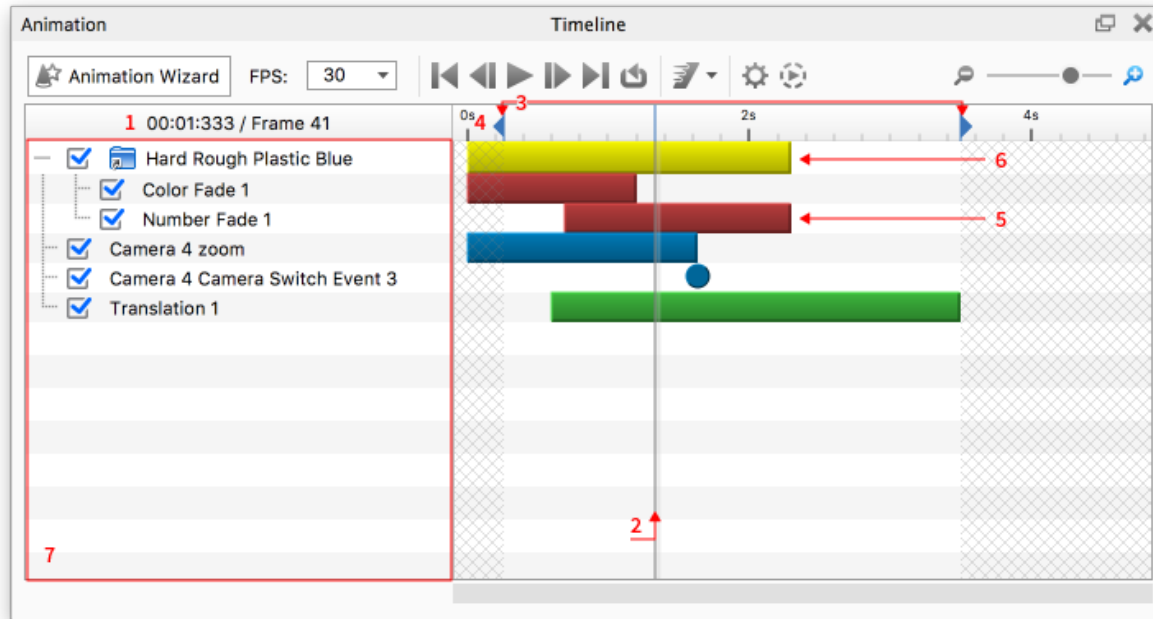

Timeline Toolbar

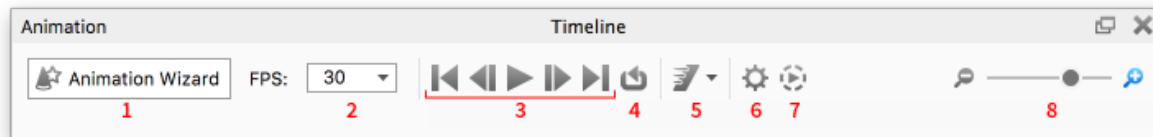

1. Animation Wizard

This opens the Animation Wizard.

2. FPS drop-down

Select from common frame rates used in video production.

3. Real-time Preview Buttons

These buttons will allow you to quickly jump to the beginning or end of your animation, scrub through the animation one frame at a time, and play a real-time preview of your animation in the real-time render window. To see a more accurate portrayal of materials and motion, click the "preview" button on the animation toolbar.

4. Loop

Enable this to loop the animation when playing in the real-time window.

5. Motion Blur

Enable this create motion blur in your rendered animation output.

6. Animation Settings


Click the settings icon to open the settings panel where you can select from *Max seconds per frame* to limit the render time of the preview, or choose *Max samples per frames* to limit the quality of the preview. You can also choose to in-/exclude the last frame and if Geometry nodes should be executed for the animation - see the [Geometry Node types](#) page for more info.

7. Render Preview

Click this button to begin rendering a small video file of your animation with more accurate results than the realtime preview.

8. Zoom Slider

Use this to change the scale of the Animation Timeline.

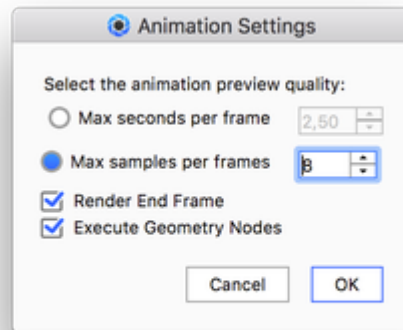


Geometry View Window

The Geometry View window provides a secondary OpenGL viewer for use as a secondary view for lighting, camera or animation setup.

Geometry View

1. **Settings**
Set the background color and customize what is visible: ground grid, lights, cameras, etc.
2. **Display Style**
Controls your model's display style: shaded, flat, wireframe, shaded wireframe, and bounding.
3. **Camera Type**
Choose to sync with the active camera or navigate independently in this view.
4. **Standard Views**
Snap to a pre-defined standard camera view: front, right, top, etc.
5. **Move Tool**
Click this button to launch the Move Tool.
6. **Edit Geometry**
Click this button to launch the Geometry Editor.
7. **Geometry View**
OpenGL viewer that can be viewed next to the *Real-Time View*.

Learn more about what you can do in the [Geometry View](#) section

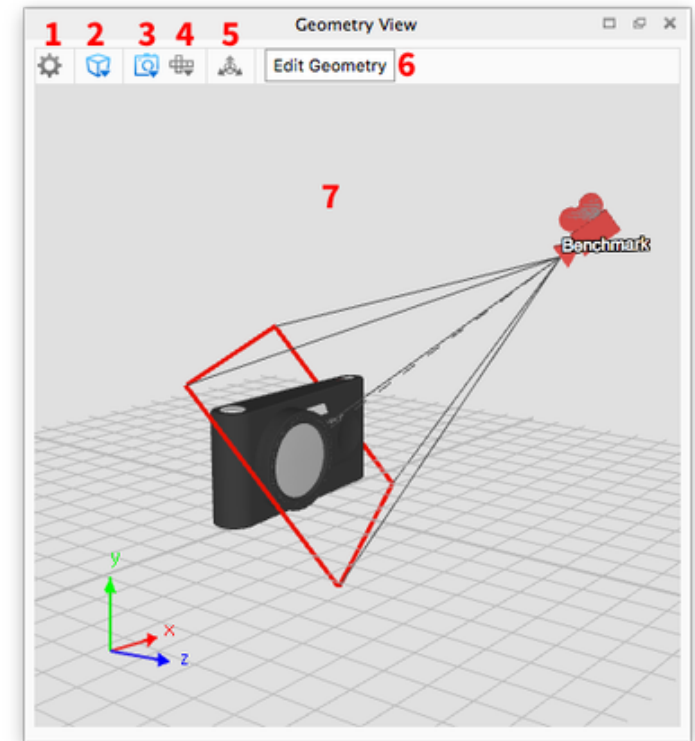


Material Template Window

The *Material Templates* window can be accessed from *Window* under the *Main Menu* or via the  *Material Template* button in the *Ribbon*.

1. **Search**
Type in any keyword to search for a material template.
2. **Add Template**
Click this button to add a material template.
3. **Import**
Import a KMTP material template file.
4. **Export**
Export a KMTP material template file.
5. **Delete**
Click this button to delete a material template.
6. **Material Templates List**
Contains a list of all material templates available in your resources folder.
7. **Add Rule**
Click this button to add a rule.
8. **Delete Rule**
Click this button to delete a rule.
9. **Template Rules**
Contains a list of all the rules in the template.
10. **Apply**
Applies the template to your scene or selection.

Go to the [Material Templates](#) page to learn more.

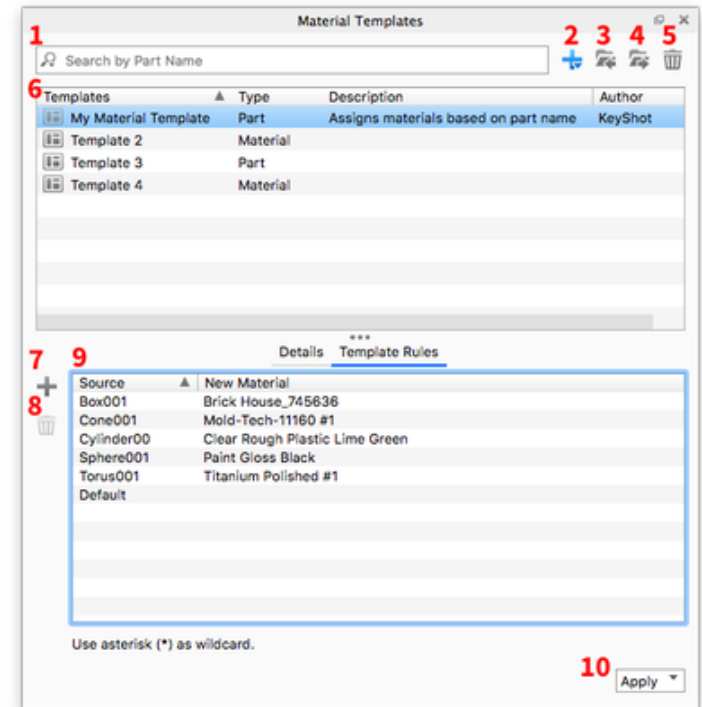

Welcome Window

The KeyShot Welcome Window will appear after you launch KeyShot. The Welcome Window will display:

- Recently opened scenes
- Demo scenes
- Latest KeyShot News
- Latest KeyShot Tips

Click on a recently open scene to open it immediately or select *Import Model* or *Open Scene* to load another model or scene.

You can disable/enable the Welcome Window on startup in the Preferences:

- Windows: Go to *Edit, Preferences* and in the *General* section, uncheck/check *Show Welcome Window at start up*.
- Mac: Go to *Help, Preferences* and in the *General* section, uncheck/check *Show Welcome Window at start up*.

Hotkeys

Hotkeys

Learning and using the KeyShot hotkeys will speed up the process of working inside KeyShot. You can access the list of hotkeys and their functionality by pressing the *K-key* on PC or Mac.

In this section:

- [Hotkeys](#)
- [Hotkey Overview](#)
- [Customizing KeyShot Hotkeys](#)

Hotkey Overview

Display the *Hotkey Overview* window by hitting the *K-key* or selecting *Help, Hotkeys Overview...*

Setup/Details...


Opens the Hotkeys Preference window to set custom hotkeys.

Save as Image...

Allows you to save an image of the Hotkey Overview for reference or print.

Customizing KeyShot Hotkeys

KeyShot also allows you to assign custom hotkeys for many KeyShot commands. The Hotkeys preferences can be accessed by selecting *Edit, Preferences* (windows) or *Keyshot, Preferences* (mac) and selecting the *Hotkeys* section or by pressing the *K-key* to show the *Hotkeys Overview* where you will see a button for *Setup/Details...* in the bottom right corner. This will take you to the *Hotkeys* section of the *Preferences* page. Here you can set custom Hotkeys for any of the listed actions.



Camera

Tumble	LMB Drag	Pan	MMB Drag
Cycle Camera	⇧+N	Dolly	Wheel
Focal Length	Alt+Wheel	Perspective	Alt+⇧+RMB↔
Twist	Alt+Ctrl+Wheel	Select Target	Alt+Ctrl+RMB
Depth of Field	D	Center & Fit Models	Alt+Ctrl+⇧+RMB
		Reset Camera	Ctrl+R

Environment

Brightness:		Rotate	Ctrl+LMB Drag
Large Change	Up/Down	Flatten Ground	G
Small Change	Left/Right	Show:	
		Environment	E
Open Environment	Ctrl+E	Color	C
Open Backplate	Ctrl+B	Backplate	B

File

New Project	Ctrl+N	Open Project	Ctrl+O
Save	Ctrl+S	Save As	Ctrl+Alt+S
Quit	Ctrl+Q	Import Model	Ctrl+I

General

Copy	Ctrl+C	Paste	Ctrl+V
Cut	Ctrl+X	Undo	Ctrl+Z
Delete	Del	Redo	Ctrl+Y
Screenshot	P	Render	Ctrl+P

Interface

Project	Space	Toolbar	T
Library	M	Ribbon	R
KeyShot XR	X	Heads-Up Display	H
Full Screen	F	Presentation Mode	⇧+F
Coordinate Legend	Z	Geometry View	O
Show Only	Alt+LMB	Hide Part	Alt+Ctrl+LMB
Cycle Model Sets	⇧+M	Light Sources	L
Marquee Selection	⇧+LMB Drag*	Hotkeys	K

* Right to left = Cross - Left to right = Window

Adjust Value Fields with CTRL+MMB Scroll (+Shift for minor steps)

Materials

Edit Material	DbI Click	Select Material	⇧+LMB
Apply Selected	⇧+RMB	Apply Copy	Ctrl+⇧+RMB


Real-time

Performance Mode	Alt+P	Selection Outlines	Alt+S
Pause	⇧+P	Global Illumination	I
Self Shadows	S	Render NURBS	N
Render Region	Ctrl+⇧+R		

Animation

Play/Pause	⇧+Space	Animation Timeline	A
------------	---------	--------------------	---

⇧ = Shift ↔ = Drag



Camera

Tumble	LMB Drag	Pan	MMB Drag
Cycle Camera	⇧+N	Dolly	Wheel
Focal Length	⌘+Wheel	Perspective	⌘⇧+RMB Drag
Twist	⌘⌘+Wheel	Select Target	⌘⌘+RMB
Depth of Field	D	Center & Fit Models	⌘⌘⇧+RMB
		Reset Camera	⌘R

Environment

Brightness:		Rotate	⌘+LMB Drag
Large Change	↑/↓	Flatten Ground	G
Small Change	←/→	Show:	
		Environment	E
Open Environment	⌘E	Color	C
Open Backplate	⌘B	Backplate	B

File

New Project	⌘N	Open Project	⌘O
Save	⌘S	Save As	⌘⌘S
Quit	⌘Q	Import Model	⌘I

General

Copy	⌘C	Paste	⌘V
Cut	⌘X	Undo	⌘Z
Delete	⌘⌘	Redo	⇧⌘Z
Screenshot	P	Render	⌘P

Interface

Project	Space	Toolbar	T
Library	M	Ribbon	R
KeyShot XR	X	Heads-Up Display	H
Full Screen	F	Presentation Mode	⇧+F
Coordinate Legend	Z	Geometry View	O
Show Only	⌘+LMB	Hide Part	⌘⌘+LMB
Cycle Model Sets	⇧+M	Light Sources	L
Marquee Selection	⇧+LMB Drag*	Hotkeys	K

* Right to left = Cross - Left to right = Window

Adjust Value Fields with CTRL+MMB Scroll (+Shift for minor steps)

Materials

Edit Material	DbI Click	Select Material	⇧+LMB
Apply Selected	⇧+RMB	Apply Copy	⌘⇧+RMB

Real-time

Performance Mode	⌘P	Selection Outlines	⌘S
Pause	⇧+P	Global Illumination	I
Self Shadows	S	Render NURBS	N
Render Region	⇧+⌘R		

Animation

Play/Pause	⇧+Space	Animation Timeline	A
------------	---------	--------------------	---

Multi-touch

KeyShot supports multi-touch input for touch-enabled screens and tablets. The following gestures can be used on the touch screen when running KeyShot:


- **1 Finger** – Tumble camera
- **2 Finger Pinch** – Zoom
- **3 Finger Drag** – Pan
- **5 Finger Touch** – Reset camera
- **Tap and Hold** – Access right mouse button menu
- **Single Finger Drag and Drop** – Access Library assets

Tessellation Settings Window

The Tessellation Settings window can be accessed by right-clicking your model or part and selecting *Re-Tessellate* or by selecting the model/part in the *Scene Tree* and selecting *Re-Tessellate* in the *Properties* tab below.

1. **Tessellation Quality**
The quality of your surfaces. A lower value will yield rough surfaces. A higher value will yield smooth surfaces.
2. **Angle Tolerance**
The maximum allowed angle measurement between adjacent triangles on your model's surface.
3. **Distance Tolerance**
The maximum allowed distance deviation – expressed as a percentage of the model's bounding box – measured from any triangle to the actual NURBS surface. A lower value will yield smooth surfaces.
4. **Maximum Edge Length**
The maximum side length – expressed as a percentage of the model's bounding box – for any one triangle on your model's surface. A lower value will yield smooth surfaces.
5. **Tessellate**
Click to make your model appear in the Tessellation Preview at the specified Tessellation Quality.
6. **Apply**
Click to Apply the Tessellation Quality to your model in the real-time view.
7. **Tessellation Preview**
Shows you a preview of the detail on your model's surface.
8. **Triangles**
Displays the total number of triangles that make up your model's surface.
9. **Appearance**
Select Wireframe for a polygon view or Glossy to see how smooth the surfaces will look.
10. **Cancel**
Click to undo any changes to your model's tessellation and close the Tessellation Settings window.
11. **Done**
Click to accept your changes and apply them to your scene. Note that you cannot undo the changes once you click Done.

See more about [Re-Tessellation](#).

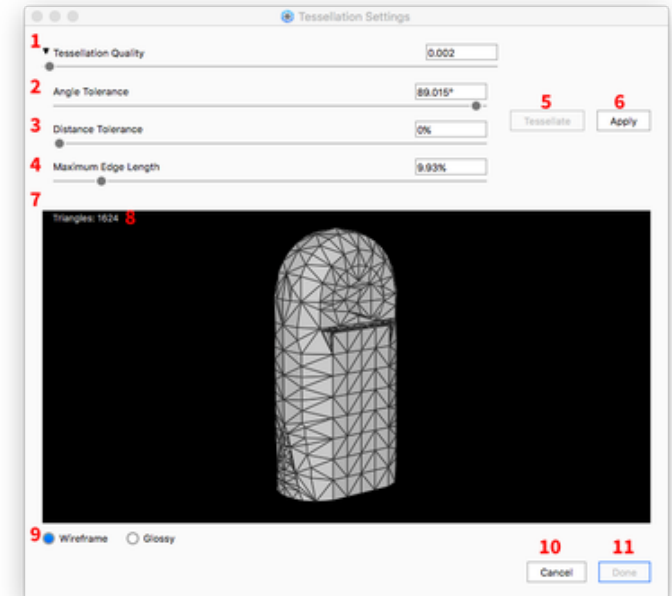

Working With Models

Overview

This section covers import, export, model setup and working with 3D CAD data.

With KeyShot, you can directly import all major 3D file formats, plus KeyShot has many free plugins for 3D modeling software. On import, KeyShot will automatically recognize your model's up orientation and match it. Other import options allow you to quickly adjust the location and import quality.

KeyShot allows you to control the model units, show/hide parts, group, duplicate parts/assemblies and create patterns of your imported data. We'll start with bringing your model in, then go over navigation and manipulating the models in your scene.

KeyShot Pro brings additional export options to KeyShot, allowing you to export formats to use in other 3D modeling and 3D printing software or upload to view in a web browser.

In this section

- [Supported File Formats](#)
- [Import Dialog](#)
- [KeyShot Plugins](#)
- [Scene Units](#)
- [Scene Tree](#)
- [Hiding And Showing Parts](#)
- [Regrouping Parts](#)
- [Moving Models and Parts](#)
- [Duplicating Models](#)
- [Pattern Tool](#)
- [Rounded Edges](#)
- [Re-Tessellate](#)
- [Revision Manager](#)
- [Geometry View](#)
- [Model Sets](#)
- [Export](#)

Supported File Formats

File Formats

KeyShot supports the following 3D file formats on both Mac and PC.

- 3ds Max (.3ds) ^[1]
- ALIAS 2018 and prior ^[2]
- AutoCAD (.dwg, .dxf)
- CATIA v5-6 (.3dxml, .cgr, .catpart)
- Cinema 4D R18 and prior (.c4d)
- Creo 4.0 and prior (.prt, .asm)
- Creo View (.pvz, .pvs, .edz, .ed, .c3di, .ol)
- Inventor 2019 and prior (.ipt, .iam)
- Maya 2017 and prior (.ma, .mb) ^[2]
- NX 12 and prior (.prt)
- Onshape ^[1]
- Pro/ENGINEER Wildfire 2-5 (.prt, .asm)
- Revit 2018 and prior ^[1]
- Rhinoceros 6 and prior (.3dm)
- SketchUp 2018 and prior (.skp)
- Solid Edge ST10 and prior (.par, .asm, .psm)
- SolidWorks 2018 and prior (.prt, .sldprt, .asm, .sldasm)
- Acis (.sat)
- Alembic (.abc) ^[3]
- 3DS (.3ds)
- 3DXML (.3dxml)
- Collada (.dae)
- FBX (.fbx) ^[3]
- IGES (.igs, .iges)
- JT (.jt)
- OBJ (.obj)
- Parasolid (.x_t)
- STEP (.stp, .step)
- STL (.stl)
- ZPR (.zpr)

[1] Plugin only
[2] Requires licensed installation of software
[3] Includes animation

Plugins

See list of plugins with LiveLinking [here](#).
Download plugins [here](#).

On this page
• File Formats • Plugins

Import Dialog

KeyShot Import

Supported file types can be imported into KeyShot in several ways:

- by pressing *Import* on the *Toolbar*.
- by dragging and dropping them into the *Real-time View*.
- via the main menu *File, Import...*

When a file is designated for import, the *KeyShot Import* window will be displayed on the screen.

Based on the type of model you are importing, some of the options below might not be displayed in your import dialog.

Location

- **Center Geometry**

When checked, “Center Geometry” will import the model and place it in the very center of the environment. Any original 3D coordinates for the model are removed when center geometry is selected. If this option is not selected, the model will be placed in the same position in 3D space where it was originally created.

- **Snap to Ground**

When checked, “Snap to Ground” will import the model and position it directly on the ground plane. This will also remove any original 3d coordinate information.

- **Keep Original**

When Checked, “Keep Original” will import the model and retain the location of the model in relation to the original origin point. Use this for multi-import assemblies with a shared CAD origin.

Size

- **Geometry Unit**

Use this dropdown menu to choose the correct units the geometry was modeled in for the first import. The model scale will be adjusted accordingly upon second import if a different unit is selected. Available only for .wire, .3ds, .obj and .stl file formats.

Up Orientation

Not all modeling applications define the up-axis in the same manner. Depending on your application, you may need to set a different orientation other than the default “Y Up” setting. Although KeyShot will recognize the up orientation of the 3D modeling software, your model may have been built in a different orientation. If your model comes in on its side, try setting a different orientation.

Environment and Camera

- **Adjust Camera to Look at Geometry**

When checked, the camera will center to fit the imported geometry in the scene upon import.

- **Adjust Environment to Fit Geometry**

When checked, the environment will size to fit the imported geometry in the scene upon import.

- **Import Cameras**

This will add native CAD cameras to the KeyShot camera list. Only available for .fbx, .ma, .mb.

On this page

- [KeyShot Import](#)
 - [Location](#)
 - [Size](#)
 - [Up Orientation](#)
 - [Environment and Camera](#)
 - [Geometry](#)
 - [Additional Options](#)
- [Importing a Second Model](#)
 - [Scene](#)
- [Importing a KeyShot BIP File](#)
 - [KeyShot BIP Import](#)
 - [Environment and Camera](#)

Materials and Structure

- **Group by**
Use this dropdown box to group the Scene Tree structure by Object (name), Material (type), Layer, Shader. Different options will show depending on file format. Group by Object/Layer retains assembly structure and naming for accuracy and flexibility. Group by Material/Shader flattens the hierarchy for a simpler tree structure by creating a single part for each material/shader.
- **Separate Materials by Part/Layer**
This option will isolate linked materials to each part by prefixing a part name to each material name.
- **Keep Individual Parts**
This option avoids merging of objects for troubleshooting purposes. It is recommended to try importing with this option disabled first to avoid excess separation of surfaces. Only available for .wire, .dwg, .dxf, .igs, .obj and .skp.
- **Retain Materials**
This option appears for Update and Add to Scene imports to ensure that materials that have already been assigned in the scene will be applied to the new import if the native CAD materials names match.
- **Import Layers as Groups**
Uses Layers setup in Maya to define tree structure. Available for .ma and .mb only.
- **Collapse Hierarchy**
Flattens tree structure to simplify Scene Tree. Available for .ma and .mb only.
- **Assign Materials from Library**
When this is enabled materials will be auto-assigned upon import if the native CAD materials have the same name as materials in the KeyShot Library.
- **Use Material Template**
If you have Material Templates set up in KeyShot you will have the option of using one to with the import. Material Templates can bulk assign materials from the KeyShot library to the imported parts based on the name of each part's original material. See the [Material Templates](#) page to learn more

Geometry

- **Tessellation Quality**
Use this slider or input box to input the tessellation quality of the geometry. Lower values will import faster and higher values will import slower. It is recommended to use the default value of .2.
- **Accurate Tessellation**
This option will optimize tessellation triangle size for improved performance. It is suggested to enable this option if available for your import format.
- **Import NURBS Data (Pro)**
This option will bring in NURBS geometry that ensures no faceting on the model for completely smooth curves.
- **Cached Geometry**
This option allows importing of an assembly without the contained part files. Available for SolidWorks and SolidEdge only.
- **Calculate Normals**
Available for .obj only. It is recommended to try importing first with this option disabled as normals may already be included in the file.

Additional Options

- **Animation**
Keyframed Transforms imports non-deformation animations. Specific Frame imports i.e. deformations at a specified frame and does not import animations to the Timeline. Available for .abc, .ma and .mb only.
- **Curve Import Options**

KeyShot Import

File: m50_assem.SLDASM

Location

☒ Center Geometry

☒ Snap to Ground

☐ Keep Original

Up Orientation

Y

Environment and Camera

☒ Adjust Camera to Look at Geometry

☒ Adjust Environment to Fit Geometry

Materials and Structure

Group by Object

☒ Separate Materials by Part

☐ Assign Materials from Library

Geometry

Tessellation Quality0.2

☒ Accurate Tessellation

☒ Import NURBS Data

☐ Cached Geometry

Import

Cancel

Curve Radius Modified adjusts imported curve thickness. Available for .abc, .fbx, .ma and .mb only.

Importing a Second Model

The import dialogue parameters change slightly when a model is already loaded in a scene and another model is selected for import or dragged and dropped onto the Real-time View. You will see three available options:

Scene

- **Add to Scene**
When checked, this will add your model to the existing scene.
- **Update Geometry**
With this checked, the newly added geometry will update the existing geometry, if part names match, replacing the old geometry.

Importing a KeyShot BIP File


A KeyShot BIP file may also be imported. In addition to the options above, you will see new keyshot BIP options.

KeyShot BIP Import

- **Open File**
Select this if you want to open the scene in its original scene.
- **Import File**
Select this option if you want to import the scene into the currently open scene.

Environment and Camera

- **Import Cameras**
Since a BIP file is a KeyShot scene, you also have the option to import any saved cameras within the scene. Select this option if you want to import cameras in the KeyShot BIP.

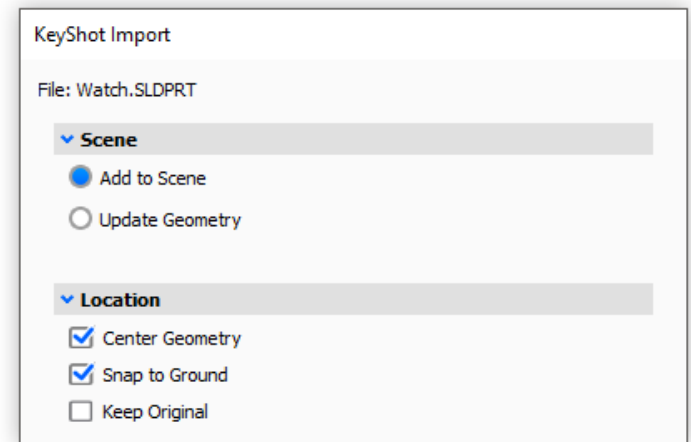

KeyShot Plugins

KeyShot offers free plugins to make your workflow from CAD to KeyShot as seamless and effortless as possible. By installing a plugin for your chosen CAD package, you can export your active geometry from within the CAD application directly into KeyShot. To download a plugin and to find the most up to date information of the plugins we offer, please visit the [KeyShot Plugins page](#). To learn more about installing plugins see [KeyShot Plugins](#).

LiveLinking

Plugins developed by Luxion (and some third-party plugins) include Luxion's LiveLinking technology. LiveLinking connects your modeling application with KeyShot, and allows you to update the model inside KeyShot without losing any material assignments, animations, lighting, and camera settings.

KeyShot Plugins

- 3DS Max 2014-2017
- Cinema 4D 19 and prior
- Creo 3.0 and prior
- Fusion 360
- Maya 2016-2018
- NX 8.5-12 and prior
- Pro/ENGINEER Wildfire 4-5
- Rhinoceros 6 and prior
- SketchUp 2018 and prior
- SolidWorks 2018 and prior

Note: All KeyShot plugins include LiveLinking

Third-Party Plugins

- Geomagic Control
- Geomagic Design
- Geomagic Design X
- Geomagic Freeform
- Geomagic Freeform Plus
- Geomagic Sculpt
- Geomagic Studio
- Geomagic Wrap
- IronCAD
- JewelCAD
- Siemens Solid Edge*
- SolidThinking Evolve
- SpaceClaim
- Pixologic ZBrush 4.7*
- ZWSOFT ZW3D

**Include LiveLinking*

On this page

- [LiveLinking](#)
- [KeyShot Plugins](#)
- [Third-Party Plugins](#)

LiveLinking

Luxion's LiveLinking technology allows you to establish a link between your 3D modeling software and KeyShot. This keeps the software separate, allowing you to continue working and refining your model in the CAD application, then send all changes over to KeyShot with the click of a button. All without losing any views, materials, textures or animations already applied.

Download Plugin

To establish LiveLinking between your CAD application and KeyShot, you must first [download and install](#) the KeyShot plugin for your CAD application. Each plugin comes with its own [installer](#) and unique setup instructions. For specific setup instructions, click [here](#).

Enable LiveLinking


LiveLinking is enabled by default. To change this go to *Edit, Preferences, General* on Windows and *Keyshot, Preferences, General* on Mac.

Unable to connect

If the your 3D modeling software is unable to connect to KeyShot via the plugin, try to change the *Port Range* in the KeyShot *Preferences*

On this page


- [Download Plugin](#)
- [Enable LiveLinking](#)
- [Unable to connect](#)

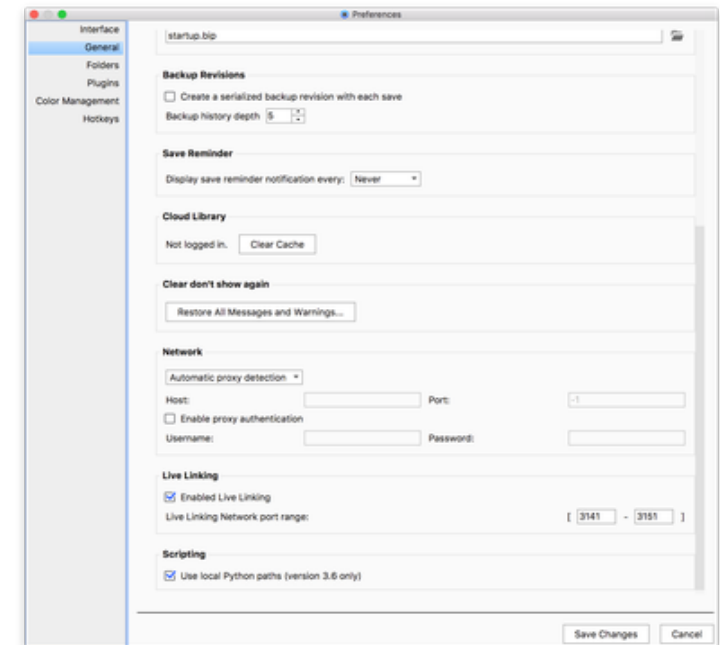

Scene Units

Scene units control model scale, light intensity, color density, and texture mapping.

To achieve physical accuracy and better control over your material and texture settings, the scene units should match the scale of your model. For example, if you wish to render a car, you should set the scene units to meters or feet. On the other hand, if you wish to render a pair of sunglasses, you should set the scene units to centimeters or inches.

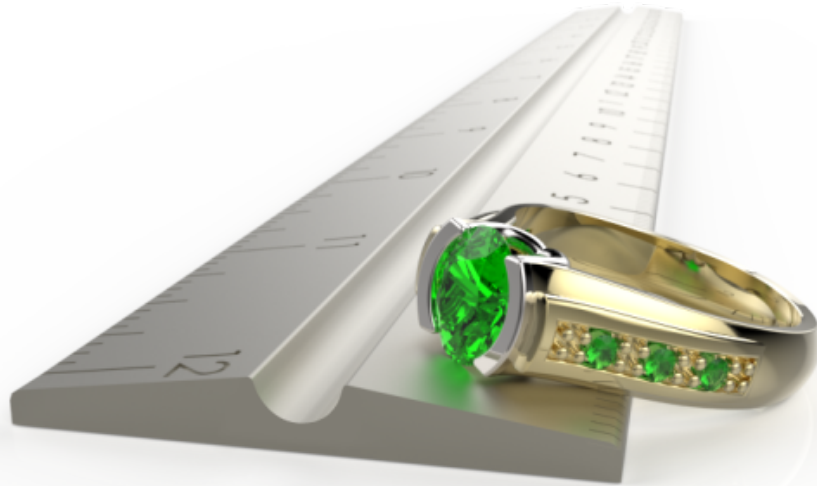

On this page

- [Changing the Scene Units](#)

When you start with an empty scene in KeyShot, it will use non-specific scene units. The units will either be set when you import a model into the empty scene the scene or when you manually set/change the scene units.

Changing the Scene Units

1. To change the model units, go to *Edit > Set Scene Units* and choose the new unit.
2. Select one of the two options: *Keep Scene Size* or *Scale Scene*.

Keep Scene Size

Applies the proper unit-conversion multiplier to your model and the KeyShot environment. When you convert scene units, say from centimeter to millimeter, you are telling KeyShot to make your 1 centimeter model into a 10 millimeter model.

Yes, mathematically they are both equivalent to each other. However, in KeyShot your model will occupy ten times as much space as it did before. Use this option when you wish to correct model size, light intensity, color density in glass, or your camera distance slider.

Scale Scene

Re-calibrates texture mapping on your model. When you correlate scene units, say from centimeter to millimeter, you are telling texture maps that one centimeter along your model is now treated as one millimeter along your model. Your model will keep its size, but texture images will re-size according to the new scale. Use this option when you wish to correct texture units.

Scene Tree

The Scene Tree displays Model Sets/models and their hierarchies along with any cameras that exist in a scene. Animations are also represented in the scene tree in versions of the software that include the animation add-on.

Collapse Scene Tree

Collapsing the scene tree hierarchy can be very useful if your model has a lot of parts. You can collapse/expand single groups or models by clicking the +/- . You can also right-click the section you would like to collapse and select "Collapse." The full hierarchy can be collapsed when you select "Collapse All."

Hide/show

Models and parts can be hidden and shown using the  icon next to the name. The  icon displayed next to animations can be used to disable and enable animations that are applied. See more on [Hiding And Showing Parts](#)

Lock

If there is a  icon next to a model or part, the geometry is present in the scene, but can not be moved/edited. Models and parts can be locked/unlocked either by right-clicking the part/model and selecting lock/unlock or in the properties tab just below the Scene Tree, where the icon can be clicked to lock/unlock.


Re-order

Models and parts can be re-ordered in the Scene Tree via drag-and-drop.

Rename

Models and parts can be renamed in the properties tab just below the Scene Tree. The Properties section always show the details for the selected part/model, including the name.

Note: It is best practice to control the naming and ordering in CAD but if you decide to do it in KeyShot it is recommended to do so before assigning textures or labels as it may cause mapping to shift. Changing the scene hierarchy will also break Live Linking and Update Geometry.

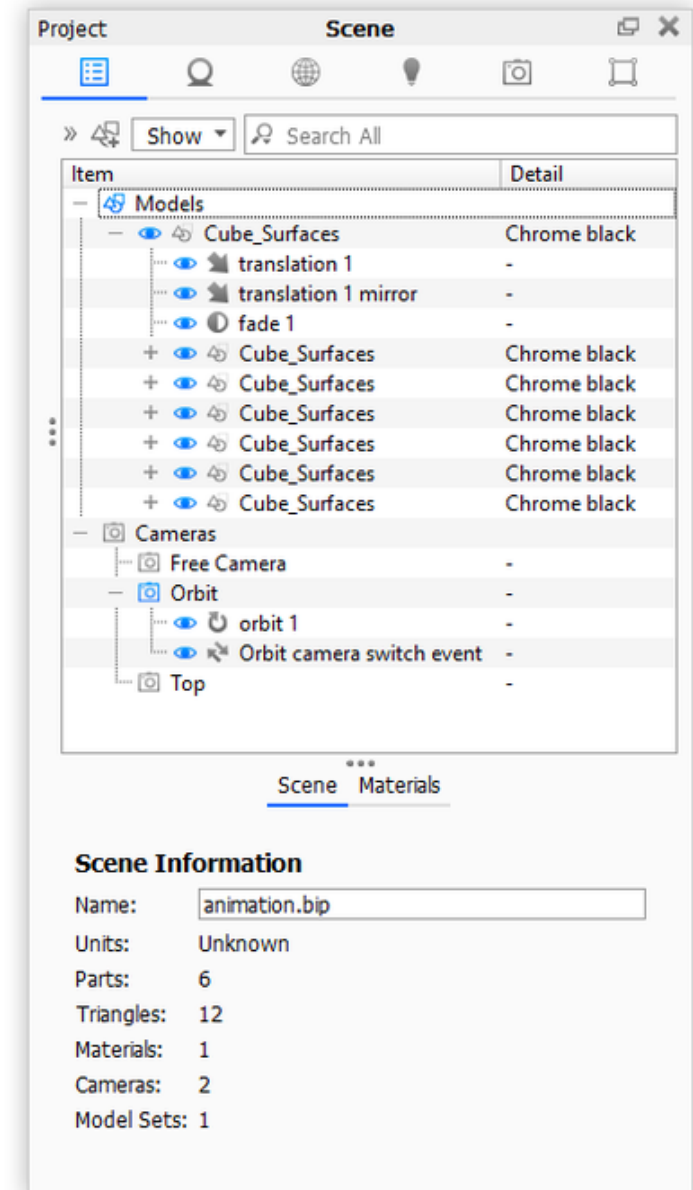

Hiding And Showing Parts

In some cases, materials may need to be assigned to parts that are enclosed in or hidden behind other pieces of geometry. In such cases hiding a part/model may come in handy.

Hiding Parts.

To hide parts, right-click on the part and select *Hide Part*.

A single part of a model can be shown when you right click on a part and select *Show Only*.

Parts can also be hidden by clicking the  icon in the Scene Tree.

Showing Parts


To display a hidden part, right-click in the interface and select *Undo Hide Part*.

To bring back all previously hidden parts select *Show All Parts*.

Parts can also be shown by clicking  the icon in the Scene Tree.

On this page

- Hiding Parts.
- Showing Parts

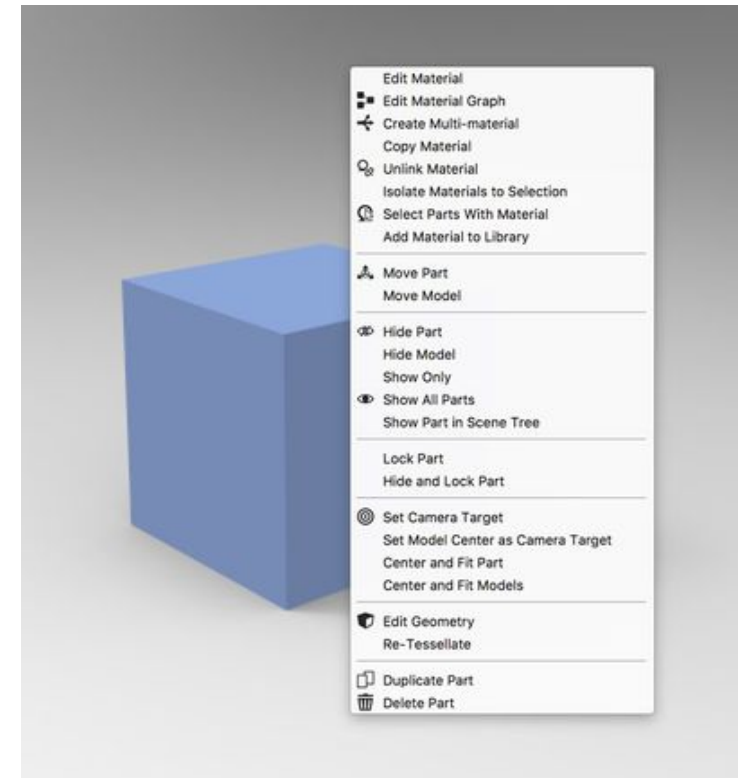

Regrouping Parts

Grouping gives you the ability to organize the scene tree.

Add to Group

When you use Add to Group you can either add to an existing group or create a new group in the desired location.

- Right-click the  part or  group (model) you want to re-group in the *Scene Tree*.
- Select Add to Group - the Add to Group Dialog is displayed.
- **Add to existing:** Select the group you want to add to and click *OK*.
- **Create new group:** Select the group to which you want to add the new group and click *New Group*.
 - Name the new group and click *OK*.
 - click *OK*.

Add Sub-Group


When you are dealing with groups, you can also Add sub group, without moving anything immediately - maybe to be ready for drag and drop reorganizing.

- Right-click the  group (model) to which you want to add a sub-group.
- Give the group a name.

Note: Reordering parts and sub-assemblies will disable LiveLinking and Update Geometry.

On this page

- [Add to Group](#)
- [Add Sub-Group](#)

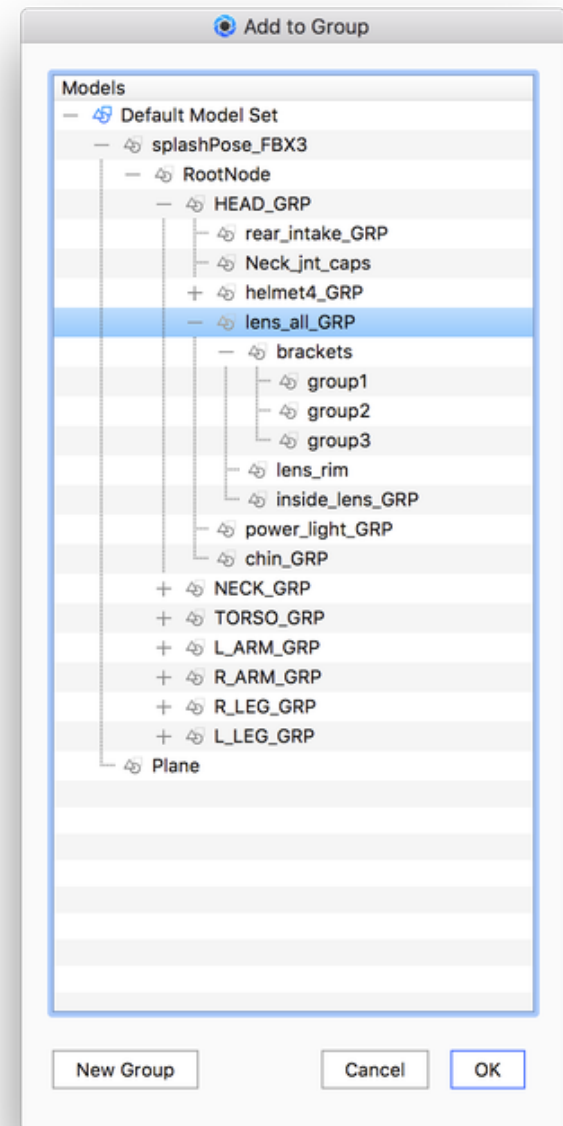

Moving Models and Parts



Move tool

With the Move tool you can translate, rotate and scale a model, part or selection.

Launch the Move Tool

The move tool can be triggered in different ways:

- Right-click a selected part/model in the *Scene Tree* and choose  *Move*.
- Right-click a part in the *Real-Time View* and choose  *Move Selection*, *Move Part* or *Move Model*, depending on what you want to move.
- Click the  *Move* button in the *Ribbon* or in the *Scene* tab of the *Project Panel*. If no part(s) are selected, this will trigger a dialog, where you can choose which part(s) you want to move.
- Use the hotkey ctrl+d on Windows and cmd+d on Mac. If no part(s) are selected, this will trigger a dialog, where you can choose which part(s) you want to move

Once you have selected what to transform, the *Move Tool* will be visible in the *Real-Time View*. The *Move Tool* consists of different handles that control translation, rotation, and scale in the X, Y, and Z directions.

Mode

Select which handles you want to see on the move tool. When rotating you can press *Shift* while dragging to make the rotation snap in 15° increments.

Axis

Choose an axis from which to reference your transformations.

- Local uses the axis inherent in the part or model
- Global uses the XYZ coordinates from the KeyShot scene.

Pivot

By default the Pivot is in the center of the current selection. To select another pivot point click *Pick* to launch the *Pivot Selection* dialog.


- **Pick:** When the *Pivot Selection* dialog is displayed you can select a part or a model/group to use as Pivot - either in the *Pivot Selection* dialog itself or by clicking on the part in the *Real-Time View* - followed by *OK*. This effectively sets the center of the selection as the pivot. The name in the pivot field is changed to the name of the part/group and the *Move tool* is moved to the pivot point.
- **Reset:** The reset button will return the pivot point to the original position in the center of the part(s) and the text in the pivot field now says *Self* again.

Snap

Snap to Pivot

On this page

- Move tool
 - Launch the Move Tool
 - Mode
 - Axis
 - Pivot
 - Snap

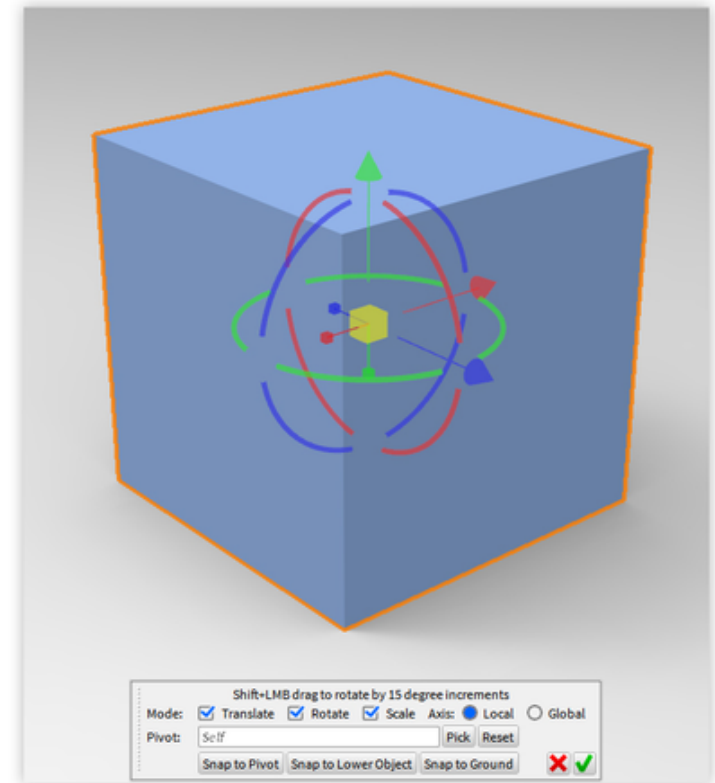

The *Snap to Pivot* option will move the part(s) to the selected pivot. More precisely will the option align the center of the part(s) with the center of the pivot object.

Snap to Lower Object

The *Snap to Lower Object* option will automatically move the bottom edge of the object's bounding box to the top edge of the bounding box of the part located below.

Snap to Ground

The *Snap to Ground* quickly moves the model in the Y-direction (up-down) to snap the lowest point on the models bounding box to the ground plane. This is useful when the model has been moved and is no longer touching the ground plane.


Duplicating Models

Models and parts can be duplicated by:

- Right clicking the model/part in the *Scene Tree*
- Select *Duplicate*.

This action duplicates the model along with any assigned materials and animations, to the same level in the *Scene Tree*.

Tip: If you want a copy of the entire model, maybe to try out model variations - take a look at [Model Sets](#).

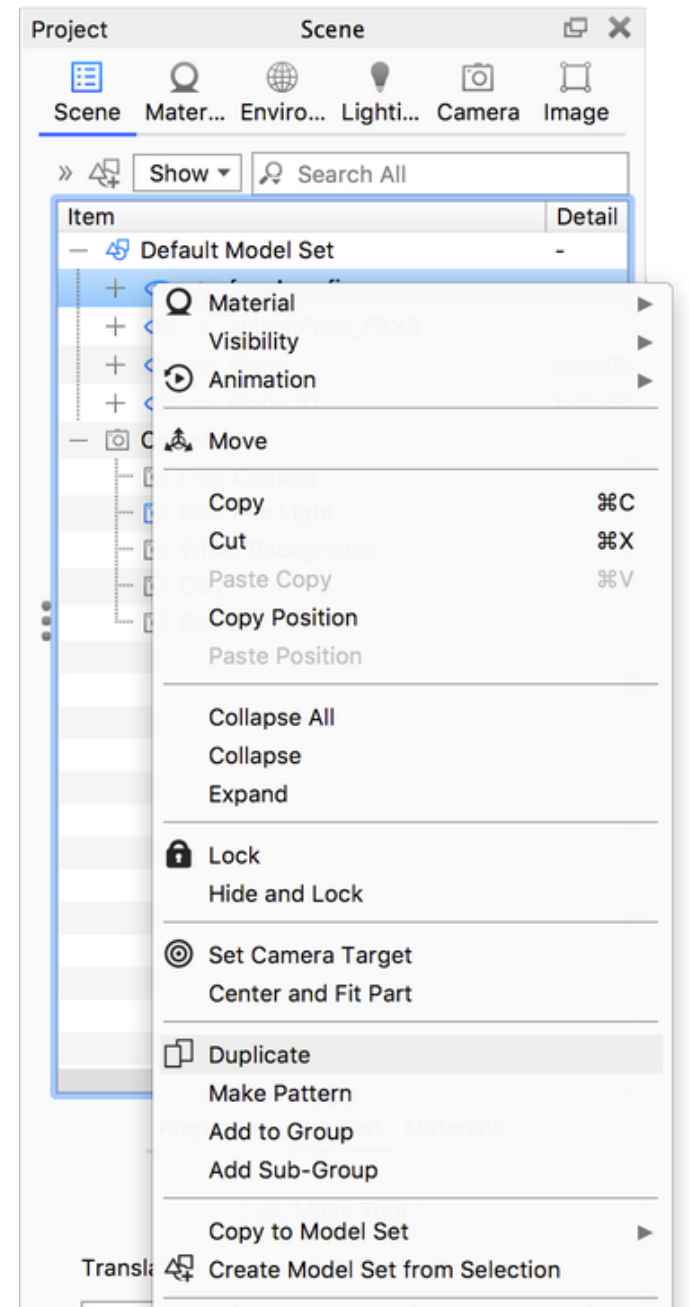

X	0	Render Layers
Y	-0,469	Re-Tessellate
Z	-1,706	Delete

Pattern Tool

The *Pattern Tool* allows you to create instances of models instead of duplicates, which increases speed and decreases file size.

Right click a model in the Scene Tree, and select *Make Pattern* to open the *Pattern Tool* dialog.

Pattern Tool Settings

Linear

Instances (Linear)

This allows you to set how many instances are created along the X, Y, and Z axes.

Spacing (Linear)

This allows you to set the spacing of the instances for X, Y, and Z.

Rotate Objects

Instances can be rotated along the Y of each local access to dynamically position them in the scene. Use this field to choose how far instances will be rotated along the Y axis.

Scattering

Use this to randomly place patterned objects. useful for scenes where a more random distribution of objects is desired.

Displacement

This controls the amount of deviation occurs from the original pattern matrix.

Y Rotation

This changes the amount an object is randomly rotated by in the Y axis.

Center

Centers the pattern to the scene.

Resize Environment

Automatically increase the environment size to accommodate all instances.

Adjust Camera

Enable this to have the camera automatically shift to include all instance within the field of view.

Circular

Count

This allows you to set how many instances are arrayed around an axis.

On this page

- Pattern Tool Settings
 - Linear
 - Circular
- Editing Patterns



Radius

This allows you to set the distance from the instances to center or pattern axis.

Fill Angle

The angle at which to array the instances. 360 is a full circle.

Rotate Objects

Instances can be rotated along the Y of each local access to dynamically position them in the scene. Use this field to choose how far instances will be rotated along the Y axis.

Scattering

Use this to randomly place patterned objects. useful for scenes where a more random distribution of objects is desired.

Radial

This determines how much the instances may differ from the given radius.

Angular

This determines how much the instance-angle may differ from the default position on the given Fill Angle.

Y Rotation



This changes the amount an object is randomly rotated by in the Y axis.

Center

Centers the pattern to the scene.

Resize Environment

Automatically increase the environment size to accommodate all instances.

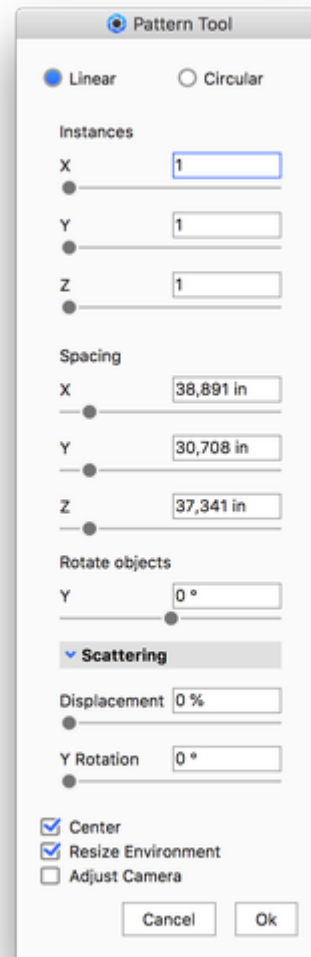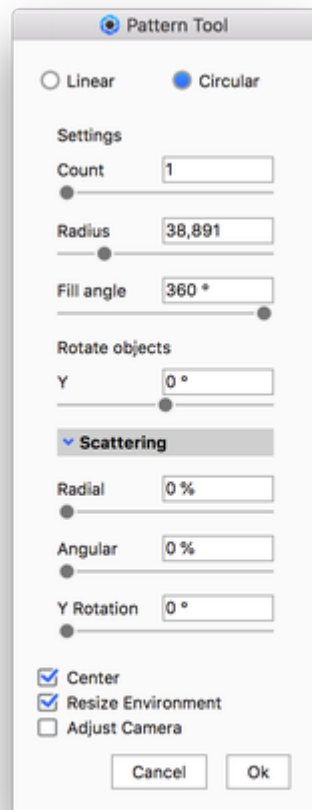

Adjust Camera

Enable this to have the camera automatically shift to include all instance within the field of view.

Editing Patterns

In the scene tree, right click on patterned object and select "edit pattern" to open the Pattern window to make changes.

Rounded Edges

The Rounded Edges feature allows you to simulate fillets on parts, without actually altering the geometry in your modelling software and thus causing an increase of triangle-count.


The adjustment sliders can be accessed by selecting one or more part-level objects in the Scene Tree, which will then display the Rounded Edges accordion in the Properties sub-tab below.

Radius

The *Radius* slider is unit-aware to your Scene Units. Because it is a simulated effect, you will experience the best results if you keep this value low.

Minimum Edge Angle

The Minimum Edge Angle slider allows you to limit Rounded Edges to corners greater than the set degree value.

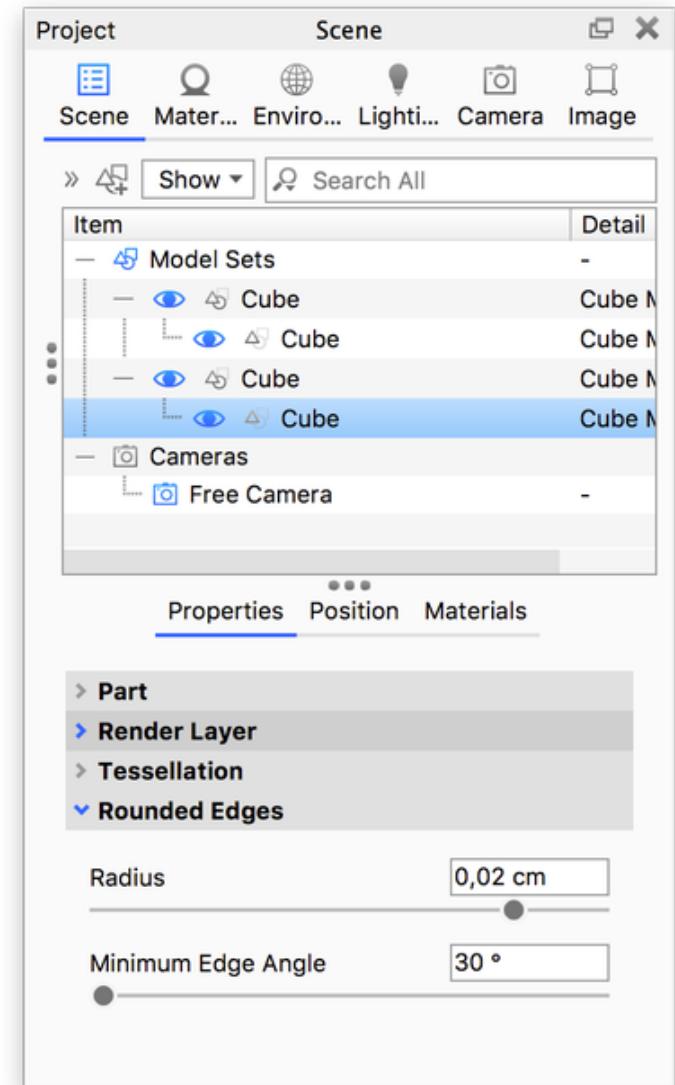

Re-Tessellate

Models that contain NURBS data can be re-tessellated directly in the scene without having to import the model all over again.

Re-Tessellate allows you to fine tune tessellation quality of entire models or individual parts in your scene. Increasing the tessellation value will yield smoother surfaces on your model and increase scene file size. In order to *Re-Tessellate*, you must enable the *Import NURBS Data* checkbox at import (*Geometry* section inside the [Import dialog](#)).

How to Re-Tessellate:

1. Right-click on a model, part, or multi-selection of parts in the scene tree or real-time view.
2. Select *Re-Tessellate*.
3. This will open the *Tessellation Settings* dialog. Change the *Tessellation Quality* or drill down to access finer adjustments including *Angle Tolerance*, *Distance Tolerance*, and *Maximum Edge Length*. For more information about settings, click [here](#).
4. Click the *Tessellate* button to show a preview in the *Tessellation Settings* dialog, which can be displayed as a *Wireframe* or *Glossy* representation.
5. Click *Apply* and *Done* to commit the changes to the scene. *Cancel* will revert all changes and exit the dialog.

Revision Manager

Instead of overwriting the BIP file, the Revision Manager will create a serialized backup every time that you save your scene. The result is a .BIP.XX file (where "XX" is the revision index number) every time that you save. This allows you to revert to any saved version of your BIP file or delete revisions that you don't need anymore.

Enable Revision Manager

The instructions below assume that you've enabled *Backup Revisions*


- **Windows:** *Edit > Preferences > General*
- **Mac:** *KeyShot > Preferences > General*

And that you've saved your scene at least twice.


Manage your revisions

1. With your scene open, go to *File > Revision Manager*. The Revision Manager window appears.

On this page
• Enable Revision Manager • Manage your revisions

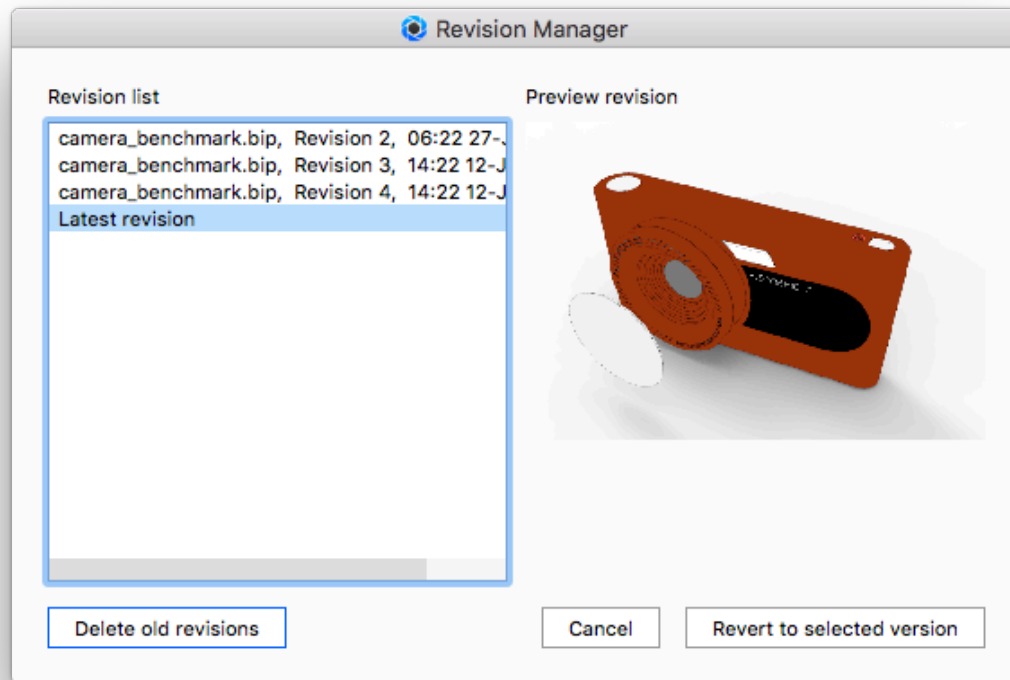

2. From the Revisions list, select the version (revision) of your scene to which you wish to revert. Then, click *Revert to selected version*.

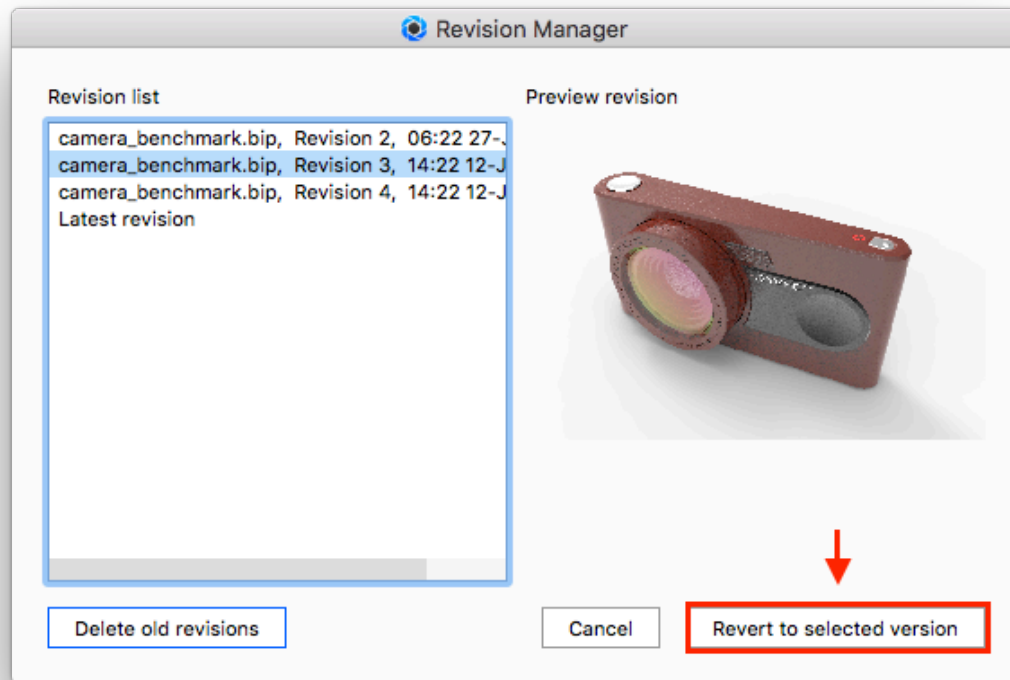

3. To delete a revision, simply select it and click *Delete old revisions*.

Revision Manager

Revision list

camera_benchmark.bip, Revision 2, 06:22 27-
camera_benchmark.bip, Revision 3, 14:22 12-J
camera_benchmark.bip, Revision 4, 14:22 12-J
Latest revision

Preview revision



Delete old revisions

Cancel

Revert to selected version

Geometry View

This highly responsive OpenGL secondary viewer complements the *Real-time View* to add more capabilities and a faster workflow for setting up your scene. Some benefits of the *Geometry View* are:

- Animations can be played back at a true 1:1 speed.
- A secondary camera can be used to position physical lights easily in a scene.
- Scene transformations and composition setup are faster.
- All Camera Path Animations can be viewed and edited.

In this section

- [Geometry View Settings](#)
- [Display Style](#)
- [Camera Type](#)
- [Standard Views](#)
- [Geometry Editor](#)

Geometry View Settings

On the *Geometry View Ribbon*, click on the gear icon  to access the *Geometry View Settings* panel.

Background Color


Select the background color of the *Geometry View*.

Checkboxes

Click each checkbox to toggle the display of the different elements in the *Geometry View*.

MatCap

Add/Refresh/Delete image file to use for MatCap shading of the *Geometry View*. To activate the MatCap shading see [Display Style](#).

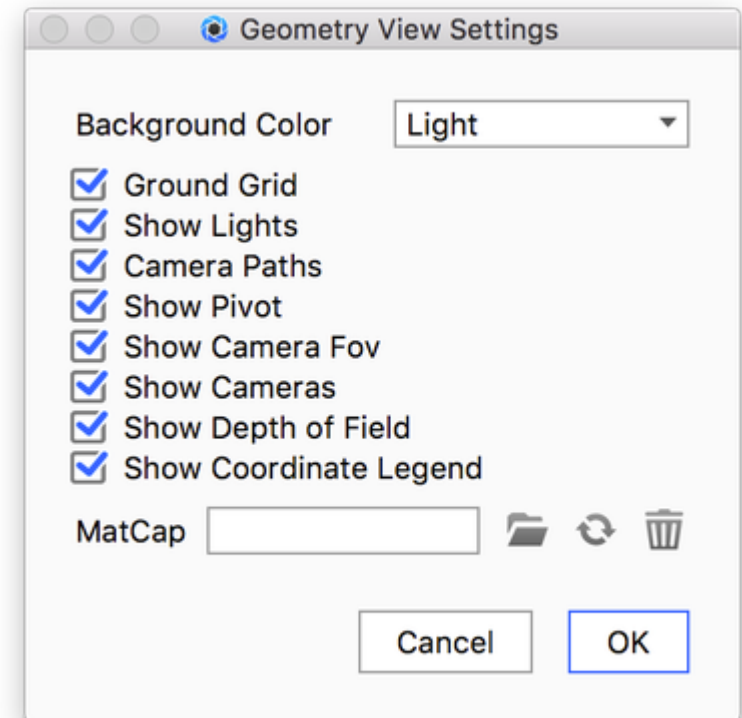


Display Style

On the *Geometry View Ribbon*, click on the *Display Style* dropdown  to change the *Display Style* of models in the *Geometry View*. The style choices are: *Shaded*, *Flat*, *Shaded Wireframe*, *Wireframe*, or *Bounding*.

Shaded

The *Shaded Display State* displays the geometry with solid colors and shaded areas.

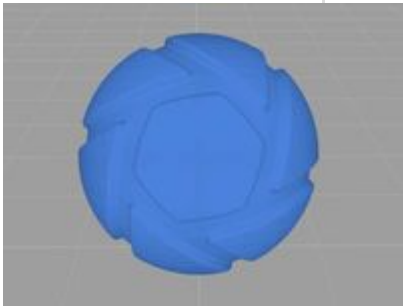


Flat

The Flat Display State displays the geometry with solid colors and no shading.



Shaded Wireframe

The Shaded Wireframe Display State displays the geometry with solid colors and shaded areas with the geometry wireframe on top.

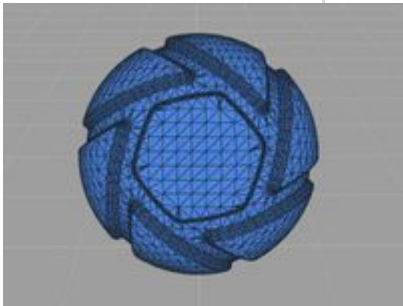


On this page


- [Shaded](#)
- [Flat](#)
- [Shaded Wireframe](#)
- [Wireframe](#)
- [Bounding Box](#)
- [MatCap](#)
- [MatCap+Color](#)

Wireframe

The Wireframe Display State displays the geometry with only a representation of the wireframe.

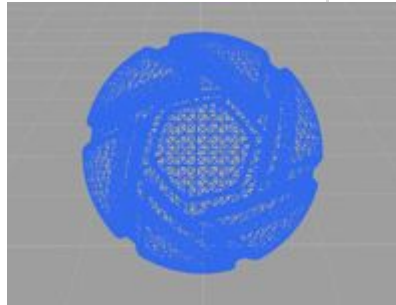**Bounding Box**

The Bound Box Display State displays the geometry with wireframe box representations of the extents of the model and part geometry.

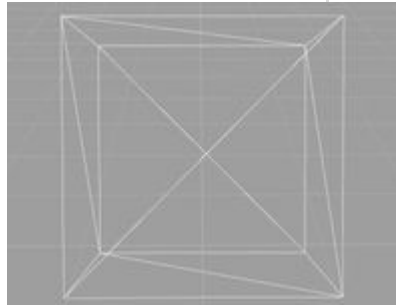
**MatCap**

The MatCap Display State displays the geometry with a MatCap shading. If you want to use another MatCap this can be set via [Geometry View Settings](#)



MatCap+Color

The MatCap Display State displays the geometry with a MatCap shading, where the colors of the objects also are displayed.

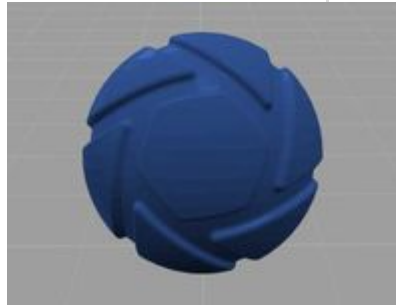

Camera Type

The Camera Type options change the view mode in the Geometry View.

Choose Camera type

From the *Camera Type* drop-down  choose a camera from these available options—*Active Camera*, *Perspective*, or *Orthographic*.

Active Camera

The Active Camera option changes the view mode to display what is seen in the frame of the current active camera. This is the camera that is active in the Real-Time View as well. This allows you to adjust the camera just as you would in the Real-time View.

Perspective

The Perspective option changes the view mode to display a perspective view of the entire scene.

Orthographic

The Orthographic option changes the view mode to display an orthographic view of the entire scene.

Note

Selecting *Perspective* or *Orthographic* will unlink the *Real-time View* from the *Geometry View* allowing you to control the two views independently of each other. However, you will still see the real-time movement and position of the active camera.

Controlling the Active camera

When you use the *Perspective* or *Orthographic* camera inside the Geometry View, you can control the Active Camera of the Real-Time View. As the camera is moved in the Geometry View, the Real-time View and camera properties in the Project window update as well. The active camera is highlighted in red, while any other cameras in the scene are gray. You can switch to a camera by clicking it.
If a camera is locked, you will need to right-click and select *Unlock Camera* to unlock the camera prior to moving it

The Active Camera can be manipulated with a move tool inside the Geometry View. This features makes positioning cameras in interiors much easier.

Move Active Camera Position

This changes the actual position of the camera. With the camera unlocked, right-click in the Geometry View and select *Move Active Camera Position*. Use the Move Tool to change the position.

- **Show:** Toggle the visibility of the Translation and Rotation handles.
- **Keep View Direction:** When *Keep View Direction* is on, the translation will move the camera parallel to the field of view, and not pivot the camera target which is the default behavior.
- **Axis:** Select Local or Global axis as the base of the Translation. Note that Rotation can only be done based on the

On this page

- [Choose Camera type](#)
 - [Active Camera](#)
 - [Perspective](#)
 - [Orthographic](#)
- [Controlling the Active camera](#)
 - [Move Active Camera Position](#)
 - [Move Active Camera Target](#)
 - [Saving Active Camera Changes](#)

Local scale.

Move Active Camera Target

This changes the 'look at' point of the camera. With the camera unlocked, right-click in the Geometry View and select *Move Active Camera Target*. The Move Tool will appear on the Camera Target. Use the Move Tool to change the position.

- **Keep View Direction:** When *Keep View Direction* is on, the translation will move both the camera and camera target, and not pivot the camera which is the default behavior.

Saving Active Camera Changes

Any changes you have made to a camera are still *unsaved* and will be reset if you switch camera.

Right-click and select Save Camera to update the current camera position or target, or select Add Camera to create a new camera. The new camera will appear in the Project window, Camera tab where the camera changes may be saved or added as well.

Standard Views

From the *Standard Views* dropdown , you can also select a display orientation of *Front*, *Back*, *Left*, *Right*, *Top*, *Bottom* or *Isometric*.

Note

Selecting a *Standard View* when the *Active Camera Type* is selected will also update the *Real-Time View*.

Choose the *Perspective* or *Orthographic Camera Type* to unlink the real-time viewing mode from the *Geometry View* allowing you to control the two views independently of each other. However, you will still see the real-time movement and position of the active camera.

Geometry Editor

Enjoy the freedom of splitting surfaces, calculating vertex normals, and closing open boundaries directly inside of the KeyShot OpenGL View.

Click *Edit Geometry* on the *Geometry View* ribbon and select a part from the part list.

You can also right-click on a part in the Scene Tree or Real-time View and select *Edit Geometry* to launch the *Geometry View* and the *Geometry Editor* dialog.

Geometry Editor Mode

Split Object Surfaces

Use the *Split Object Surfaces* option if you would like to split specific polygons from a single part. This is useful if you would like to apply separate materials to a single part, or when parts are modeled together and you would like to work with them separately.

Splitting Angle

Use this to let KeyShot automatically determine where you would like to split the part based on the angle adjacent polygons. Any polygon that has a face at an angle that is less than the value entered will be highlighted. This is useful when the split is a clear crease or angle in the part.

Polygons

Use this to select individual polygons from the surface. Hold control while you click on the part to highlight the individual polygons.

Show Wireframe

Enable this to show the wireframe of the part.

Split All

Once the polygons you want split are selected, click *Split All* to create a part for each individual polygon selected.

Split Object

Click Split Object to group the selected polygons into a single part.


Merge Selection

If you would like to merge certain split parts back, hold shift and select the parts you would like to merge and click *Merge Selection*.

To finalize the split, click *Apply* to create the new parts in the scene tree.

On this page

- [Geometry Editor Mode](#)
 - [Split Object Surfaces](#)
 - [Split Separate Objects](#)
 - [Edit Normals](#)
 - [Close Mesh](#)

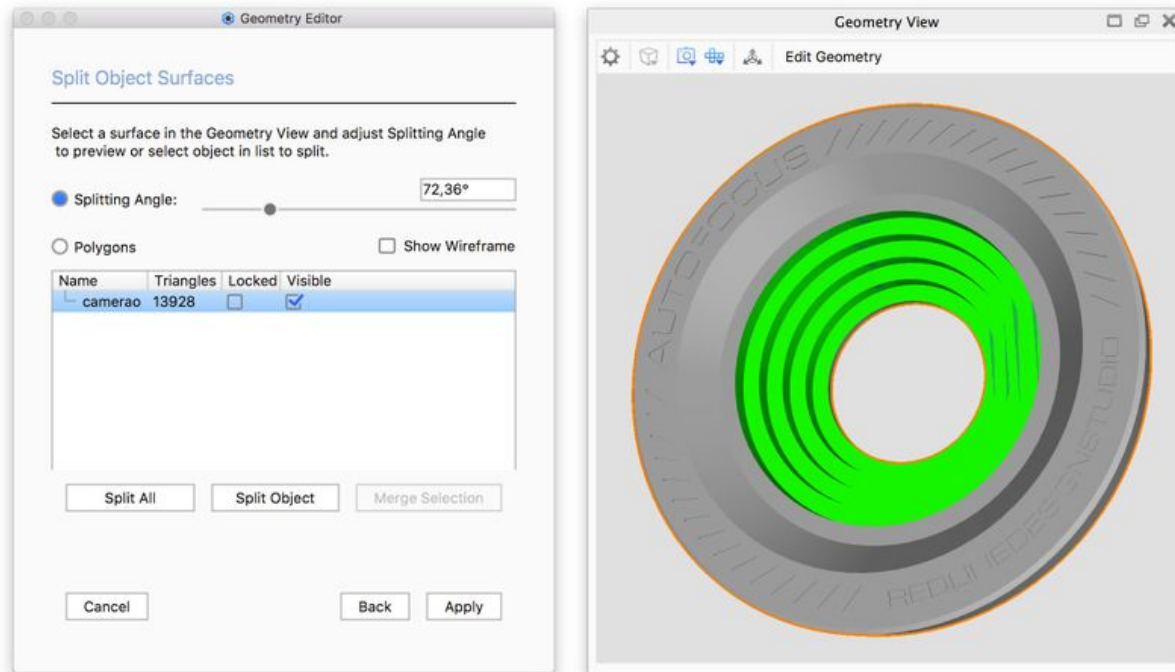

Split Separate Objects

Use *Split Object* when a your model has separate objects grouped into a single part.


Edit Normals

A normal is the direction that is perpendicular to a mesh surface. In a 3D model, the directions of your normals should all be facing the same direction, other wise holes might appear. Also if your vertex normals are not aligned, flat spots might appear on what you thought would be a curved surface.

If your model appears to have a hole or flat areas, try to unify the normals by using the *Edit Normals* tool.

Select the faulty part, and enable the *Show Vertex Normals* and *Show Face Normals*. If you see the normal of the missing polygon pointing in the opposite direction or if the vertex normals from adjacent polygons are not aligned, use the *Calculate Vertex Normals*.



Adjust the *Minimum Edge Angle* to ensure that edges that do have a crease are not aligned as well.

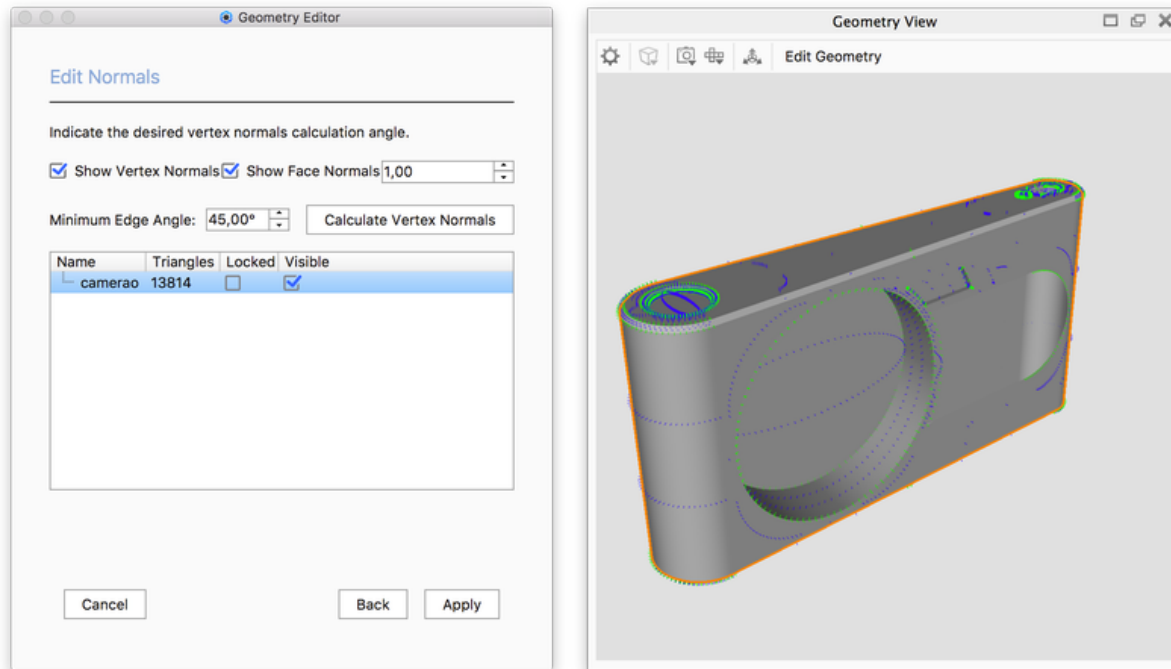

Close Mesh

If you have an open polygon with a hole, Use *Close Mesh* to fill in missing polygons.

In the *Close Mesh* window, KeyShot will list the open edges of the part you selected. You can select individual continuous holes and click *Close Selected Edges* and KeyShot will create the polygons to fill in the hole. If you have 2 holes in a part and want to create a solid connection between those two holes like a donut, select the 2 holes and click *Join Selected Edges*.

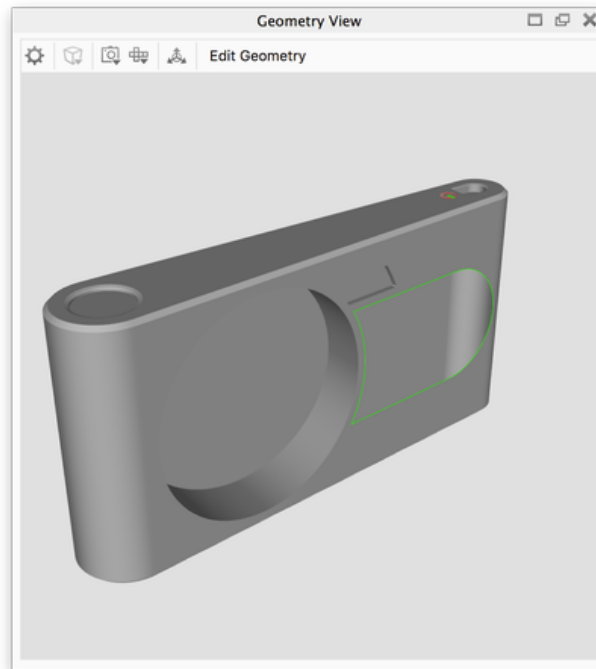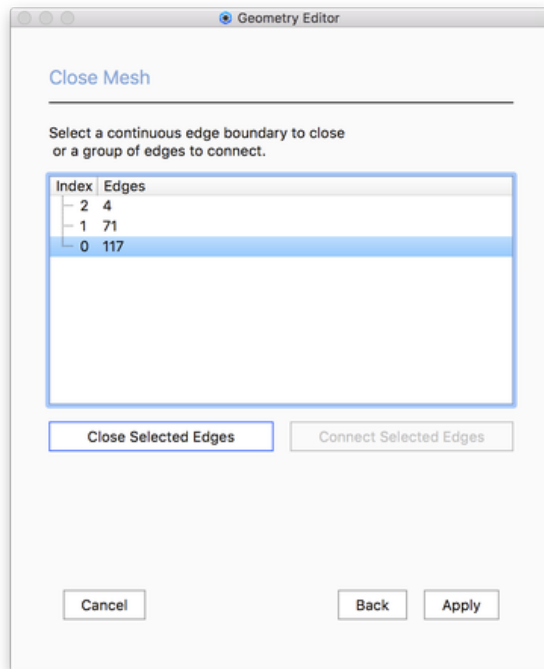

Model Sets

Model Sets allow you to save independent Scene Tree variations in a single .bip file.

The Model Sets interface is located in the *Project > Scene* tab as a sidebar on the left side of the panel.

When a Model Set is selected in the sidebar it's properties will be displayed in the sub-tab below and the contained Models will be listed in the Scene Tree.

- **Show/hide** Visibility of Model Sets can be toggled via the checkbox in the sidebar or by right-clicking and selecting *Make Model Set Active*. More than one Model Set can be active at a time.
- **Switch** Double-clicking a Model Set in the sidebar will make it active and deactivate all others (except *Always Visible*).
- **Lock/Unlock** Locking a Model Set will lock all contained models and parts.
- **Reorder** Model Sets can be reordered by drag-and-drop in the sidebar list.
- **Rename** Model Sets can be renamed via the right-click menu in the sidebar or in the Model Set properties sub-tab.
- **Always Visible** Model Sets can be set to *Always Visible* via the right-click menu in the sidebar or in the Model Set properties sub-tab. This will hide the checkbox in the sidebar. This is mostly useful for staging geometry such as a ground plane or props.

Adding Model Sets

A new Model Set can be added by

clicking the  *Add Model Set* icon above the Model Sets sidebar, which will launch the Add Model Set dialog. Here you can give it a name, specify some options and see an overview of the models to be cloned into the new Model Set.

You can also access this dialog by selecting the models/parts in the Scene Tree you wish to include in the new Model Set > right-click and select *Create Model Set from Selection*.

Model Set Preview Thumbnails


A preview thumbnail will automatically be generated at the time of creation based on what is currently visible in the Real-time view.

Render Preview: The preview thumbnail can be manually generated at any time by clicking the *Render Preview* button in the Model Set properties tab, via the right-click menu in the Model Sets sidebar or via the  icon above the Model Sets sidebar.

Thumbnail Size: Also available via the  icon is the ability to select the size of the thumbnails that are displayed in the

On this page


- [Adding Model Sets](#)
- [Model Set Preview Thumbnails](#)

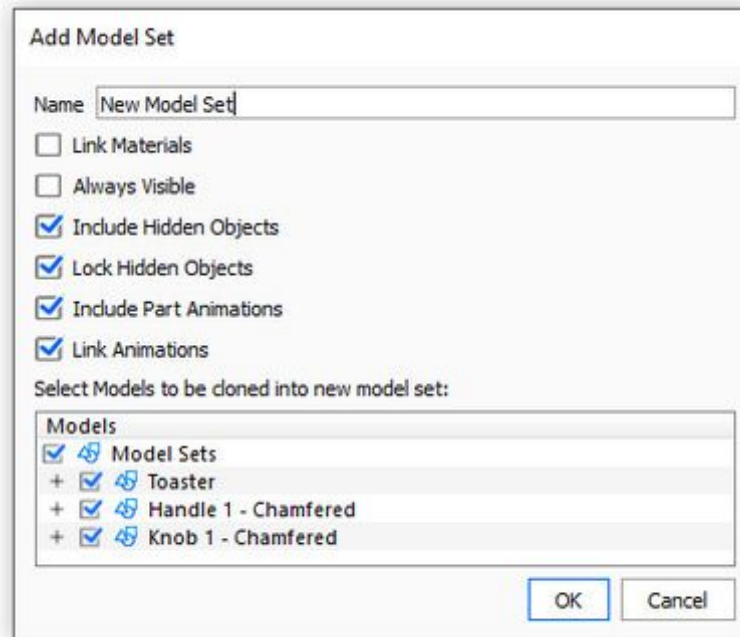

sidebar or the option to not show them at all.

Thumbnail Render Settings:

- **Samples:** number of samples used to render the thumbnails and enable
- **Center and Fit:** If you wish to use the current camera for the thumbnail preview make sure *Center and Fit* is disabled.
- **Render High Res:** If you are using the Configurator and wish to display your Model variation thumbnails larger than 256px you will have to select *Thumbnail Render Settings* from the settings dropdown menu and enable "Render High Res".

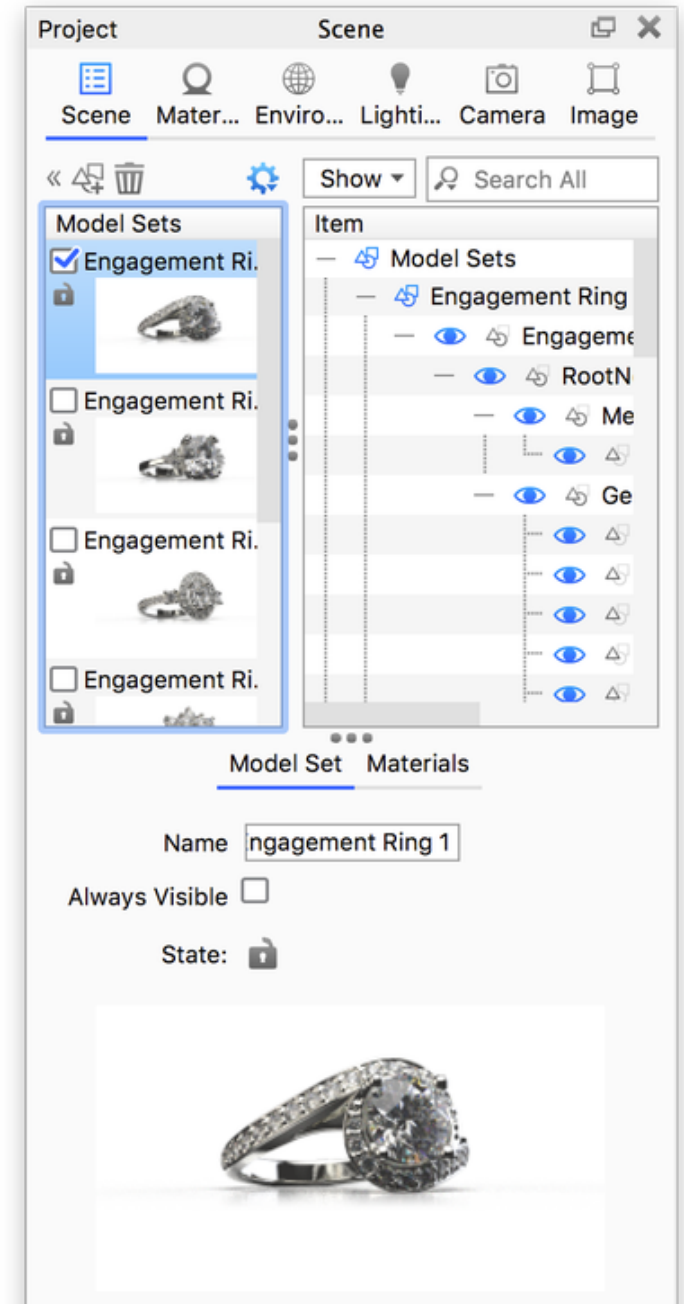

Render Preview

Export

There are three primary methods for generating output from KeyShot.

1. Screenshots

A screenshot of the Real-time View can be generated by selecting the *Screenshot* button on the *Toolbar* or by hitting the *P-key*. Learn more about the Screenshot option [here](#).

File format output:

- **JPEG**
- **PNG**

2. Render Output

KeyShot can create still images, animations, and interactive web visuals with unlimited resolution. Learn more about render output options [here](#).

File format output:

Still Images	Animations	KeyShotXR	Configurator
Image Output • JPEG • TIFF* (8 bit) • TIFF* (32bit) • EXR* (32 bit) • PNG* • PSD*† • PSD*† (32 bit)	Video Output † • AVI (MPEG4) • AVI (Uncompressed) • Quicktime (MPEG4) • Quicktime (Uncompressed) • Flash Video Frame Output † • JPEG • TIFF* (8 bit) • TIFF* (32bit) • EXR* (32 bit) • PNG* • PSD* • PSD* (32 bit)	Image Output • JPEG • PNG* Supporting Files • HTML • JS Other • iBook	Image Output † • JPEG • TIFF* (8 bit) • TIFF* (32bit) • EXR* (32 bit) • PNG* • PSD* • PSD* (32 bit)

*alpha channel option

† KeyShot Pro only

3. Export Options

KeyShot Pro adds additional 3D output options to extend operations for specific workflows. The export options can be found in the KeyShot *File* menu.

File format output:

On this page

1. Screenshots
2. Render Output
3. Export Options


- **OBJ** - A simple, but ubiquitously supported 3D format.
- **FBX** - Widely supported 3D format owned by Autodesk.
- **GLB/GLTF** - "The jpeg of 3D". Designed to bridge the gap between 3D content creation tools and modern 3D applications.
See the following guides for additional information on working with glTF data: [GLB Tutorials on Facebook](#)
- **STL** - A common 3D format mostly used in 3D printing.
- **ZPR (Windows only)** - A 3d format developed by Z Corporation. Used in 3D printing.

Note

The GLTF format does not support following material types: Flat, Thin Film, Translucent, Advanced, Anisotropic, Gem.

Materials

The sections here cover where to find materials, how to work with materials, common material parameters, and all of the material types and their parameters. Since KeyShot is designed for anyone to create realistic visuals, an understanding of these concepts is not necessary, but can help you gain a deeper understanding of how rendering and material creation work.

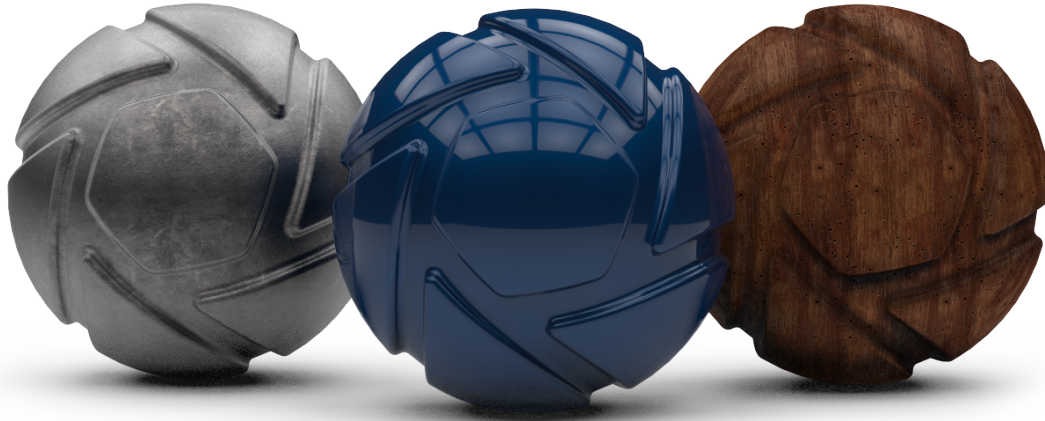

In this section

- [Material Library](#)
- [Assigning Materials](#)
- [Editing Materials](#)
- [Copying Materials](#)
- [Saving Materials](#)
- [In-Project Library](#)
- [General Parameters](#)
- [Material Types](#)
- [Color Library](#)
- [Color Picker](#)
- [Material Graph](#)
- [Multi-Materials](#)
- [Material Templates](#)

Material Library

Material presets are found in the KeyShot *Library*, *Material* tab.

The material presets you see are all created using a KeyShot *Material Type*. Each library material has been designed to be easy to use with as few parameters as needed. For example, the *Metal* library materials use the *Metal* material type and will only display the parameters needed for metal materials. Likewise, the *Plastic* library materials use the *Plastic* material type will have only the parameters needed for plastic materials.

Stock Materials

KeyShot ships with 750+ materials ranging from cloths and leathers to metals, plastic and even smoke. The materials are arranged in folders

Library Updates

The KeyShot Library has been updated to take advantage of the latest KeyShot material, texture and environment capabilities. Learn more about the new updates [here](#).

Custom Materials

You can create your own materials use the library materials as a starting point to [edit](#), [copy](#) and [save](#) your own materials.

KeyShot Cloud Materials

Thousands of KeyShot materials generated by Luxion, KeyShot partners and KeyShot users are available on KeyShot Cloud. You can access KeyShot Cloud from the far left side of the KeyShot *Toolbar* or at <https://cloud.keyshot.com>. Learn more about KeyShot Cloud [here](#).

Additional Materials

A KeyShot Content installer is available for KeyShot 8 users on both Windows and Mac. The installer contains high-quality materials with textures from [Poliigon](#) that have been excluded from the regular Keyshot installer because of their size. ...*The materials in the Installer are the same as offered in the [Content installer for KeyShot 7](#), but they have been updated to take full advantage of the improvements to KeyShot 8 materials....*

Download the installer here:

- [KeyShot 8 Content \(Win\) 700 MB](#)
- [KeyShot 8 Content \(Mac\) 710 MB](#)

Content Installation


After downloading, run the installer. During installation, the new resources will be added to your KeyShot Resource folder and visible in the KeyShot library, *Materials* tab next time KeyShot is launched. The new Poliigon folder will be added to your Materials folder.

On this page

- [Stock Materials](#)
- [Custom Materials](#)
- [KeyShot Cloud Materials](#)
- [Additional Materials](#)

Note

If you installed the Poliigon material pack in KeyShot 7 and chose to migrate your resources to KeyShot 8. The Poliigon materials will only be overwritten with the new version, if the folder has been moved from the migration folder to the root of the Material library at the time you install the KeyShot 8 Content pack - Otherwise you will have 2 versions of the "same" material.

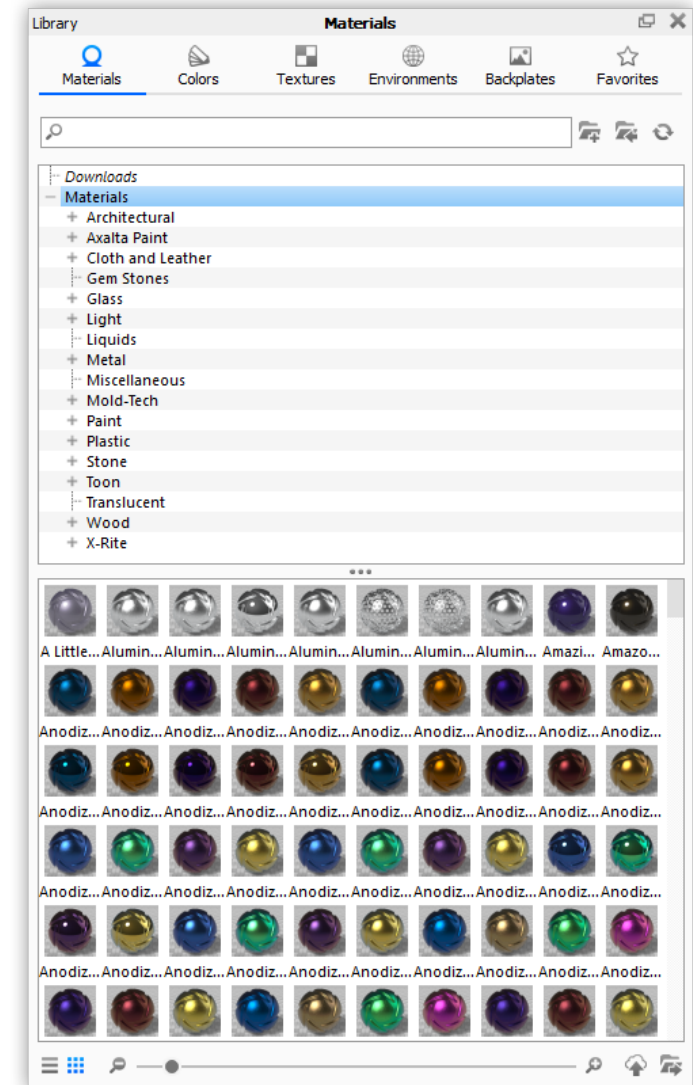

Poliigon Textured Materials

Poliigon textures in KeyShot are encrypted and can only be used inside KeyShot. Below is a cross-reference for all KeyShot Materials using Poliigon textures, If you need the textures for other purposes.

Folder	KeyShot Material Name	Poliigon Texture Name	Poliigon Texture Link
Bricks	Poliigon - Bricks Grey 1,	Bricks 03	https://www.poliigon.com/texture/50
	Poliigon - Bricks Grey 2		
	Poliigon - Bricks Red 1,	Bricks 02	https://www.poliigon.com/texture/49
	Poliigon - Bricks Red 2		
Concrete	Poliigon - Concrete Pitted 1,	Concrete 24	https://www.poliigon.com/texture/186
	Poliigon - Concrete Pitted 2		
	Poliigon - Concrete Plates 1,	Concrete Plates 01	https://www.poliigon.com/texture/207
	Poliigon - Concrete Plates 2		
	Poliigon - Concrete Spots 1,	Concrete 03	https://www.poliigon.com/texture/165
	Poliigon - Concrete Spots 2		
	Poliigon - Concrete Stripes 1,	Concrete 04	https://www.poliigon.com/texture/166
	Poliigon - Concrete Stripes 2		
Stone	Poliigon - Concrete Textured 1,	Concrete 36	https://www.poliigon.com/texture/198
	Poliigon - Concrete Textured 2		
	Poliigon - Grunge Wall 1,	Grunge Wall 039	https://www.poliigon.com/texture/959
	Poliigon - Grunge Wall 2		
	Poliigon - Granite,	Marble 40	https://www.poliigon.com/texture/1125
	Poliigon - Granite Shiny		
	Poliigon - Marble	Marble 11	https://www.poliigon.com/texture/1096
	Poliigon - Solid Surface Countertop 1,	Tiles 19	https://www.poliigon.com/texture/1661
	Poliigon - Solid Surface Countertop 1 Shiny,		
	Poliigon - Solid Surface Countertop 2,		
	Poliigon - Solid Surface Countertop 2 Shiny		

Material Types
• Bricks • Concrete • Stone • Plaster • Tiles • Wood Flooring • Fabric • Wood

	Poliigon - Tiles Stone Warm 1, Poliigon - Tiles Stone Warm1 Shiny, Poliigon - Tiles Stone Warm 2, Poliigon - Tiles Stone Warm 2 Shiny	Tiles 03	https://www.poliigon.com/texture/1645
Plaster	Poliigon - Plaster 1, Poliigon - Plaster 2	Plaster 35	https://www.poliigon.com/texture/1402
Tiles	Poliigon - Tiles Marble White, Poliigon - Tiles Marble White 2	Tiles Rectangular Marble 001	https://www.poliigon.com/texture/2303
	Poliigon - Tiles Polished Black	Rectangular Mirror Black 001	https://www.poliigon.com/texture/2304
	Poliigon - Tiles Polished White	Rectangular Mirror White 001	https://www.poliigon.com/texture/2308
	Poliigon - Tiles Rectangular Brushed, Poliigon - Tiles Rectangular Brushed Shiny	Rectangular Brushed 001	https://www.poliigon.com/texture/2299
Wood Flooring	Poliigon - Wood Flooring Dark, Poliigon - Wood Flooring Dark Shiny	Wood Flooring 046	https://www.poliigon.com/texture/2201
	Poliigon - Wood Flooring Dark Neutral, Poliigon - Wood Flooring Dark Neutral Shiny	Wood Flooring 067	https://www.poliigon.com/texture/2267
	Poliigon - Wood Flooring Light 1, Poliigon - Wood Flooring Light 1 Shiny, Poliigon - Wood Flooring Light 2, Poliigon - Wood Flooring Light 2 Shiny	Wood Flooring 020	https://www.poliigon.com/texture/1729
	Poliigon - Wood Flooring Medium, Poliigon - Wood Flooring Medium Shiny	Wood Flooring 059	https://www.poliigon.com/texture/2214
	Poliigon - Wood Flooring Mixed 1, Poliigon - Wood Flooring Mixed Shiny, Poliigon - Wood Flooring Mixed 2, Poliigon - Wood Flooring Mixed 2 Shiny	Wood Flooring 010	https://www.poliigon.com/texture/1719
	Poliigon - Wood Flooring Warm, Poliigon - Wood Flooring Warm Shiny	Wood Flooring 044	https://www.poliigon.com/texture/2199
Fabric	Poliigon - Linen 1, Poliigon - Linen 2	Fabric Linen 001	https://www.poliigon.com/texture/241

	Poliigon - Wool Basic 1, Poliigon - Wool Basic 2	Fabric Wool 002	https://www.poliigon.com/texture/249
	Poliigon - Wool Woven 1, Poliigon - Wool Woven 2	Fabric Wool 001	https://www.poliigon.com/texture/248
Wood	Poliigon - Ash natural Poliigon - Ash natural Shiny, Poliigon - Ash Dark, Poliigon - Ash Dark Shiny	Wood Fine 03	https://www.poliigon.com/texture/1684
	Poliigon - Beech, Poliigon - Beech Shiny	Wood Flooring 063	https://www.poliigon.com/texture/2218
	Poliigon - Birch, Poliigon - Birch Shiny	Wood Flooring 064	https://www.poliigon.com/texture/2219
	Poliigon - Cherry 1, Poliigon - Cherry 1 Shiny, Poliigon - Cherry 2, Poliigon - Cherry 2 Shiny	Wood Fine 11	https://www.poliigon.com/texture/1692
	Poliigon - Oriented Strand Board (OSB) 1, Poliigon - Oriented Strand Board (OSB) 2	Wood Fine 28	https://www.poliigon.com/texture/1709
	Poliigon - Plywood Old 1, Poliigon - Plywood Old 2	Wood Fine 01	https://www.poliigon.com/texture/1682
	Poliigon - Plywood Side 1, Poliigon - Plywood Side 2	Wood Fine 04	https://www.poliigon.com/texture/1685
	Poliigon - Walnut Dark, Poliigon - Walnut Dark Shiny Poliigon - Walnut Light, Poliigon - Walnut Light Shiny	Wood Fine 14	https://www.poliigon.com/texture/1695

Assigning Materials

To assign materials to models, drag and drop them from the *Materials* library onto a part in the *Real-time View* or in the *Scene Tree*. Before you drop the material onto the part, you will see a preview of the material on the part beneath the mouse cursor. The material will not be assigned until you let go of the left mouse button.

Once the material has been loaded from the library, a copy will be placed into the *In-Project Library* in the *Material Tab* of the *Project Window*. Any additional materials assigned to the model will also be added to the *in-Project Library*. If the same material already exists in the *In-Project Library*, a copy will be created and a number will be appended to that material.

Linked Materials

In some cases a user may want to have one material assigned to multiple parts to be able to make changes to that material, and to have the changes affect all parts. You can add Linked Materials in 3 ways

- Drag an existing material from the *In-Project library* onto the parts you want linked.
- Copy a material by selecting a part in the *Real-time View* with the desired material, right-click and choose *Copy Material* > Select the part you want linked, right-click and choose *Paste Linked Material*.
- Drag the same material from the *Material Library* repeatedly and KeyShot will ask if you want to link the materials.

You can unlink materials by right-clicking on the part and choosing *Unlink Material* - this will create a numbered copy of the material in the *In-Project Library*.

Retaining Textures and Labels

If you are dragging a material onto a part that has an existing texture or label, you can retain them and apply them to the new material by holding *Alt* for textures, or *Ctrl* for labels.

On this page

- [Linked Materials](#)
- [Retaining Textures and Labels](#)

Editing Materials


There are multiple methods of navigating to the material properties to make changes, but all editing is done in the [Material Tab](#) of the [Project Window](#)

You can access the Material Properties using any of the follow four methods:

1. Double-click a part on a model in the *Real-time View*.
2. Double-click the material thumbnail in the *In-Project Library*.
3. Right-click a part in the scene tree and select *Edit Material*.
4. Select the part in the *Scene Tree* and select *Edit Material* from the *Properties* pane.

Any of these methods will activate the *Project* window, *Material*, *Properties* for the material assigned to the part. All material edits made will update interactively in the *Real-time View*. For more detailed information on material settings and types please see the [Material Types](#).

If you are a KeyShot Pro user you can also use the [Material Graph](#) for editing the materials

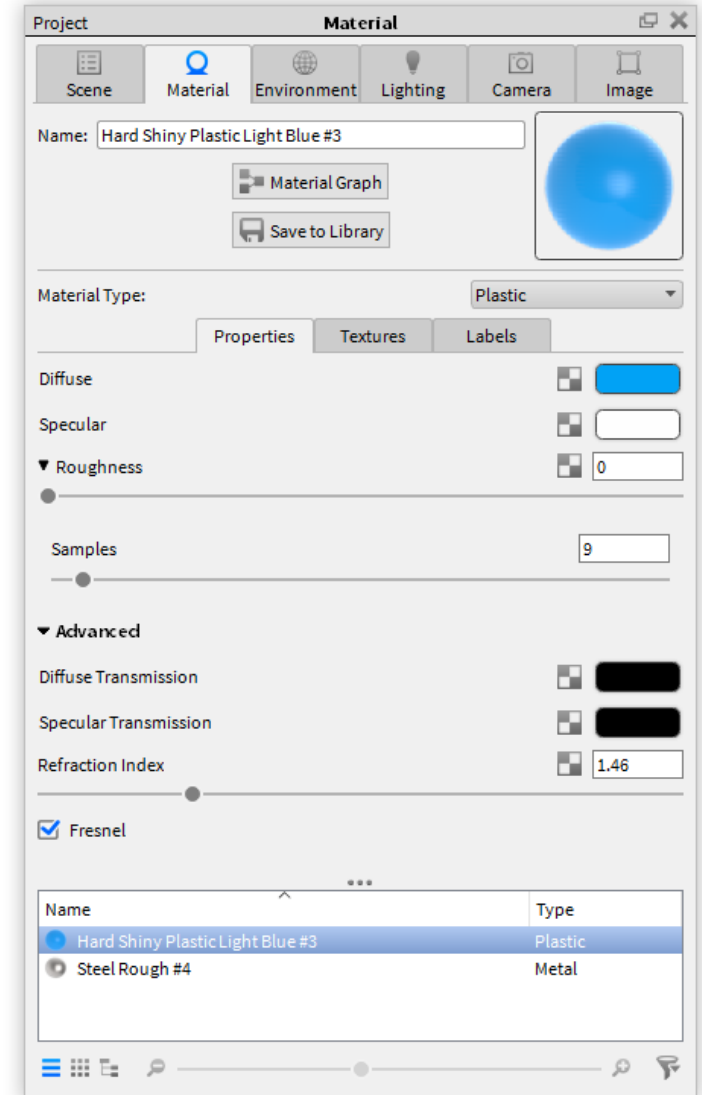

Copying Materials

When Copying materials it is important to decide if you want separate versions of the same materials or if the materials should be linked.

Linked Materials

When two parts have a linked material any edits made to the material will affect all parts.

There are several methods of copying and pasting materials you want to be linked

- Press “Shift + Left Click” on a material assigned to a model. That will copy the material. Next, to paste the material, press “Shift + Right Click” on another part. That will copy the same material from the [In-Project Library](#) and paste it to another part. this will paste the material as a linked material.
- Drag and drop a material from the [In-Project Library](#) onto a part that does not already have that material assigned.
- Right-click a part and select *Copy Material* in the context menu. Right-click another part and select *Paste Linked Material*.

Separate Materials

Every time you apply materials that are not linked, an instanced copy of the material will be created in the In-Project Library.

- Press “Shift + Left Click” on a material assigned to a model. That will copy the material. Next, to paste the material, press “Shift + Alt + Right Click” on another part. That will copy the material in the [In-Project Library](#) and paste it to another part.
- Drag and drop a material from the [Material Library](#) on different parts, Keyshot will ask if you want to link.
- Right-click a part and select *Copy Material* in the context menu. Right-click another part and select *Paste Material*.

Hotkeys

Shift + Left Click – Copy Material (Select Material)

Shift + Right Click – Paste Linked Material (Apply material)

Shift+ Alt + Right Click – Paste Material (Apply Copy)

On this page

- [Linked Materials](#)
- [Separate Materials](#)
- [Hotkeys](#)

Saving Materials

There are two ways to save materials.

- Right-click a material directly on the model and select *Add Material to Library*.
- Click the  *Save to Library* icon on the [Material Tab](#) in the [Project Window](#).

Once you have gone through either step, a dialogue will prompt you to designate a destination folder in the material library. After the folder location has been selected, the new material will be saved to the library.

Note

You can create your own folder to save custom materials. Simply click the  add folder icon in the [Material Library](#).

In-Project Library

The “In-Project Library” is found in the lower half of the *Scene* tab (under materials) and in the *Material* tab below the properties of the current material. Here all materials in the scene will be represented in the form of material ball thumbnails or in a list view.

When a material is pulled from the material library and assigned to a model, a copy of that material is placed in the In-Project Library. If the material is already present in the scene you will be asked if you want to link the materials. If you say no, an instanced version of the material will be added to the In-Project library.

If a material is no longer being used in the scene, it will be automatically removed from the In-Project Library. For example, if a material is assigned to only one part and a new material is assigned to that part, the previous material will be removed from the “In-Project Library” since it is no longer used in the scene.



Multi-Materials (pro feature) will be labeled for easy discovery.

Below the material thumbnails you can select list/grid view, set the thumbnail size and choose to filter what is shown in the In-Project Library

Material View

The In-Project library in the material tab also has a Material View option. This will show the structure of advanced materials, created in KeyShot Pro, and allows you to adjust the effects of the nodes even if you are not a KeyShot Pro user.

In the example to the left you see the properties of a Displace node that creates the water drops on the glass in the ice-water demo-scene that is bundled with KeyShot 8

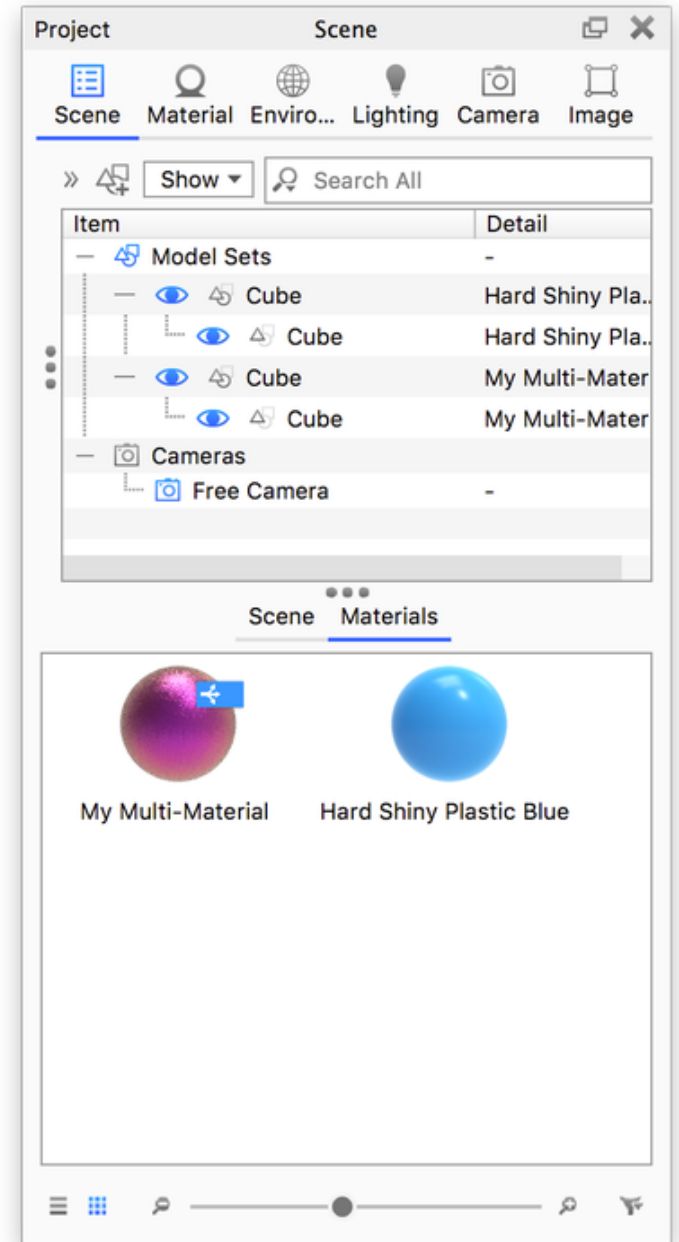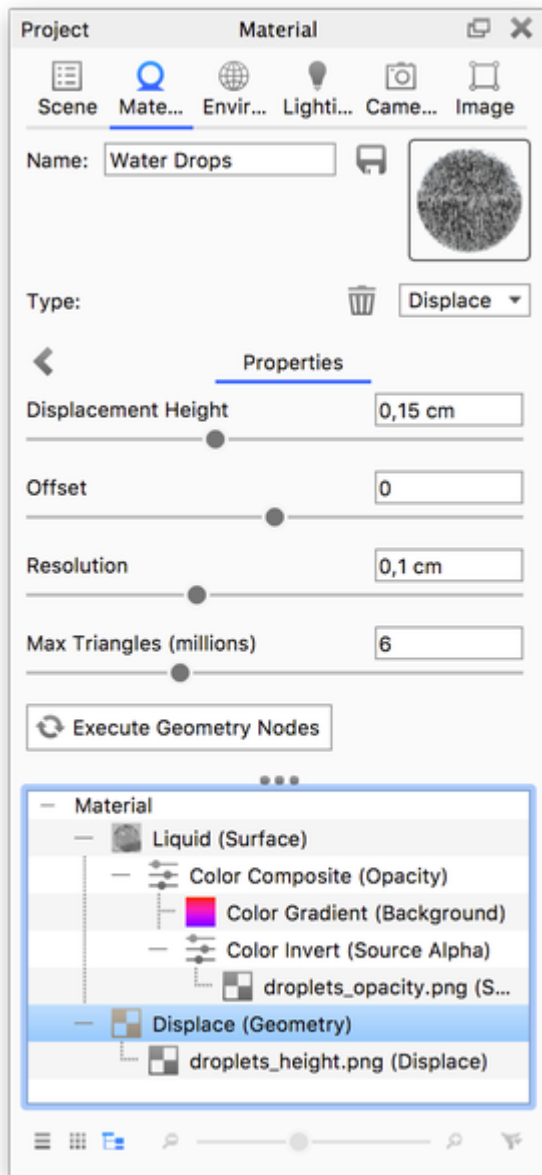

The In-Project Library in the Scene tab of the Project panel

General Parameters

Here you will find descriptions of general parameters used in KeyShot materials.

- [Diffuse Parameter](#)
- [Specular Parameter](#)
- [Refractive Index](#)
- [Roughness Parameter](#)


Diffuse Parameter

The *Diffuse* parameter will be found throughout many of the material types.

The most basic way to think of diffuse when working in KeyShot is a material's overall color. However, there is a more technical explanation of what this is that can help when creating materials "scattered" or "spread out."

Diffuse in the rendering world refers to how light reflects off of materials. Depending on the surface of a material, light rays will behave differently when they hit the surface. If a surface has few or no imperfections, like a polished surface, light rays will bounce straight off. This will produce a shiny or reflective surface. If the surface has many imperfections, like concrete, light rays will be scattered across the surface creating a matte look. This is why concrete is not reflective or shiny.

The diffuse slider on many materials will control the color of the diffuse rays on a material.

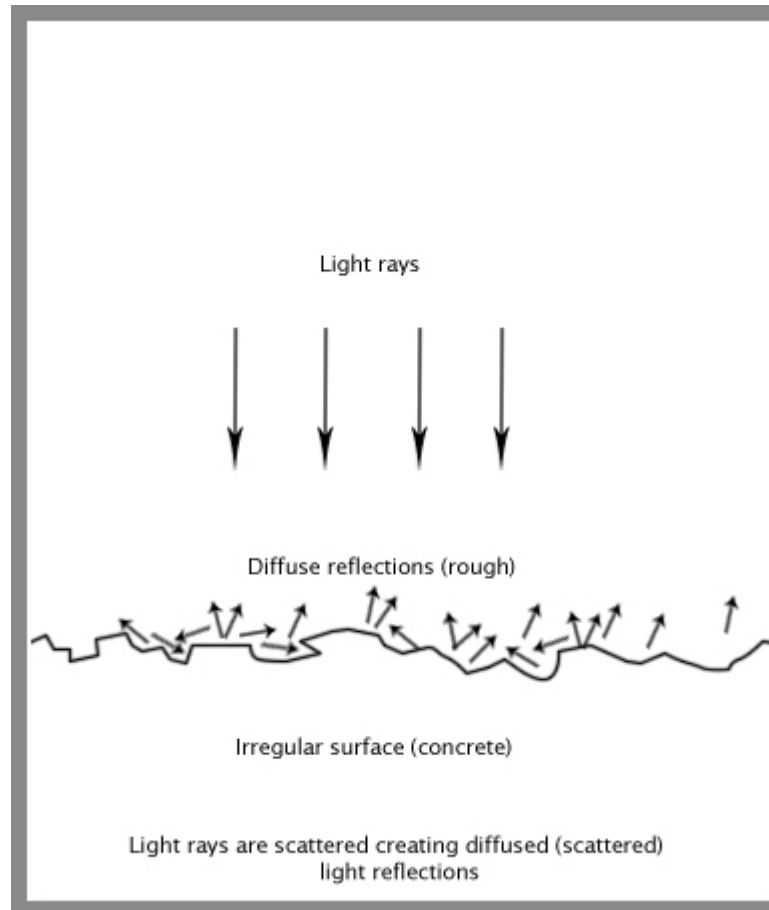


Specular Parameter

The *Specular* parameter is another parameter that will be found with many material types.

Specular reflections are reflections that are bounced off a material surface without scattering. Materials appear reflective or shiny when a surface is polished and has few to no imperfections. When the specular color is set to black, a material will have no specular reflections and will not appear reflective or shiny.

Specular color set to white will give 100% reflectivity for that material. Metals do not have diffuse color so any color will be derived entirely from the specular color. The specular color of plastics should be set to a grayscale value.

The specular parameter will control the color and intensity of the specular light reflections on a material.

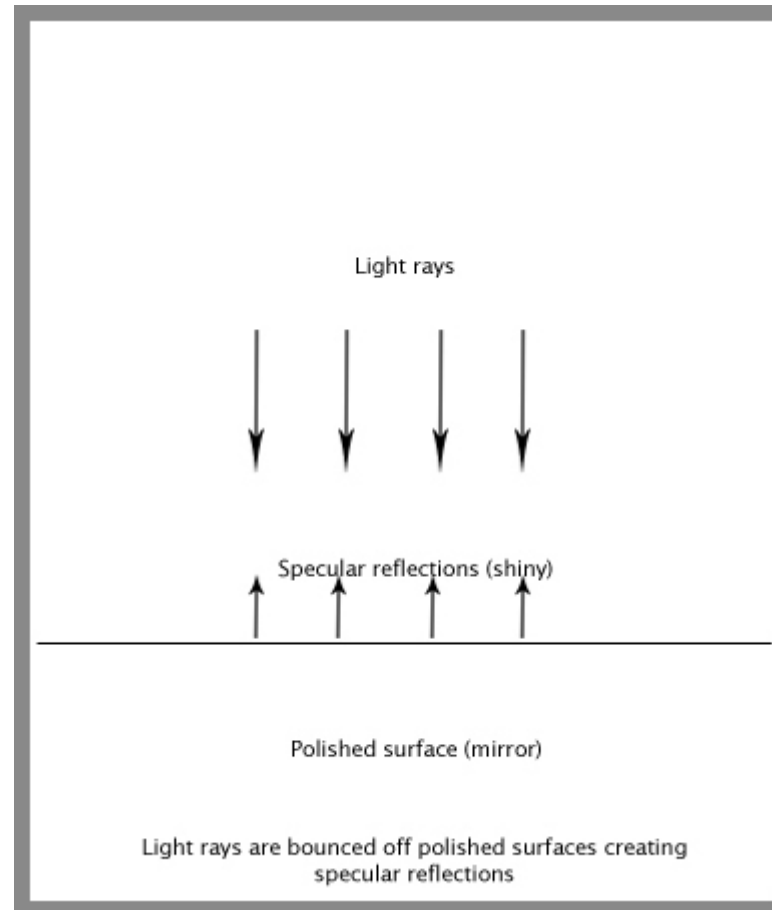


Refractive Index

Refractive Index is a material parameter that is found in multiple KeyShot material types. The term might not be familiar, but refraction is something that is seen every day. A good example is when a person sticks their hand in a pool. The light is bent, or “refracted” and the arm looks broken.

Refraction occurs because light travels through different media at different speeds. This reduction in speed is referred to as a material's refractive index (or index of refraction) and is represented by a number. For example, water has an index of refraction of 1.33, glass has an index of refraction of 1.5 and diamonds have an index of refraction of 2.4. This means that light travels through water 1.33 times slower than it does through a vacuum. Light travels through glass 1.5 times slower, through diamonds 2.4 times slower and so on. The slower light travels, the more it is bent and distorted.

Refractive indices for different materials can be easily found online. Once the value is found, it may be entered into the *Refractive Index* property of a material, and will be accurately represented in KeyShot.

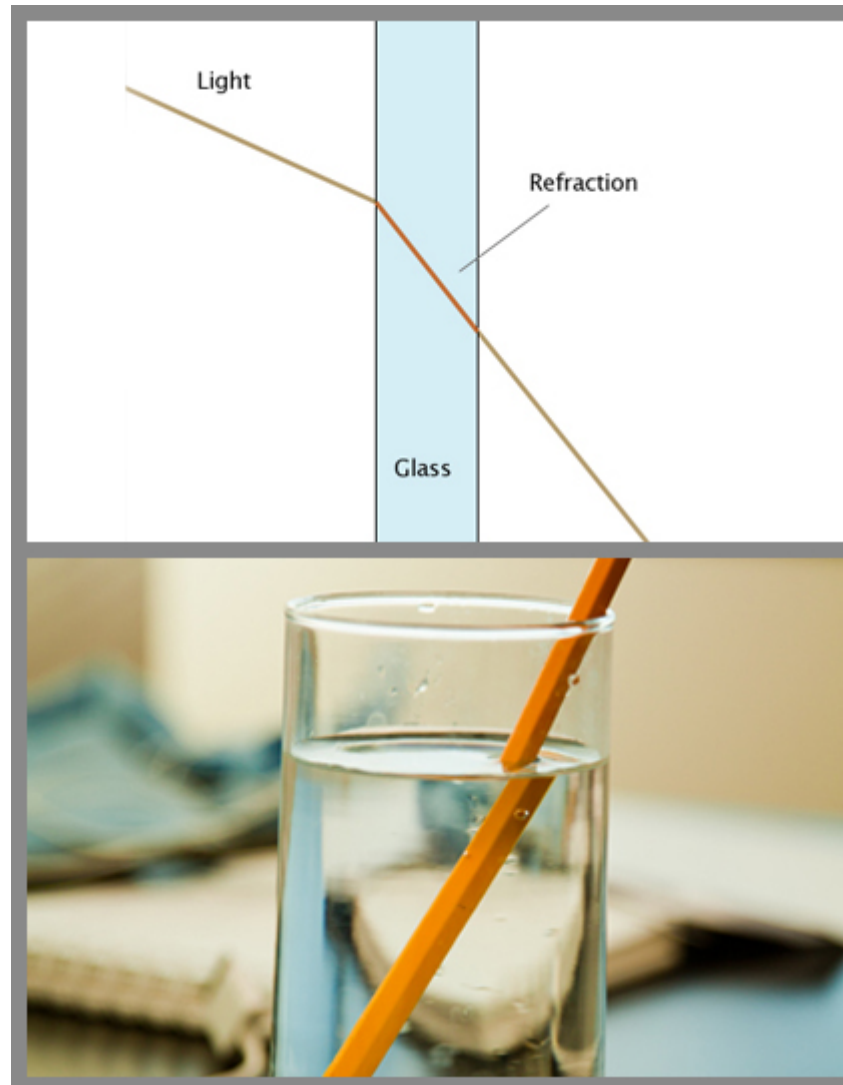

Caustics

Caustics is the pattern of light and color that occur when light rays are refracted or reflected. In everyday life you encounter caustics when you for

example place a glass of water on a table.

**Volume Caustics**

Caustics will now work inherently with volumes (e.g. scattering media), however, caustics will only be applied to light sources outside the volume and this is only supported in interior mode.

Roughness Parameter

The *Roughness* parameter is another setting that will be found on multiple material types in KeyShot.


This is a slider that will add microscopic levels of imperfections to surfaces to create rough materials. The diagram that explains the *Diffuse* parameter can also help explain why materials appear rough. When roughness is added, light rays are scattered across the surface which causes specular reflections to break up. Due to the additional light scattering, rough materials are more challenging and take more processing power to render than perfectly reflective surfaces.

Samples

Since glossy materials with some roughness are more complex to render, KeyShot has a setting built in that can improve the accuracy of these rough materials. This setting is called *Samples*. This allows you to set how many rays are emitted from a pixel in a rendered image. Each ray collects information from its surrounding environment and returns this information back to the pixel to determine the final appearance. You will see the *Samples* slider when you click the expand arrow next to the *Roughness* slider.

Note

Interior Mode uses a different and more intelligent approach to samples than the one Product mode uses. The improved approach means that customization of *Samples* only has effect in Product Mode as it is not necessary in Interior Mode.

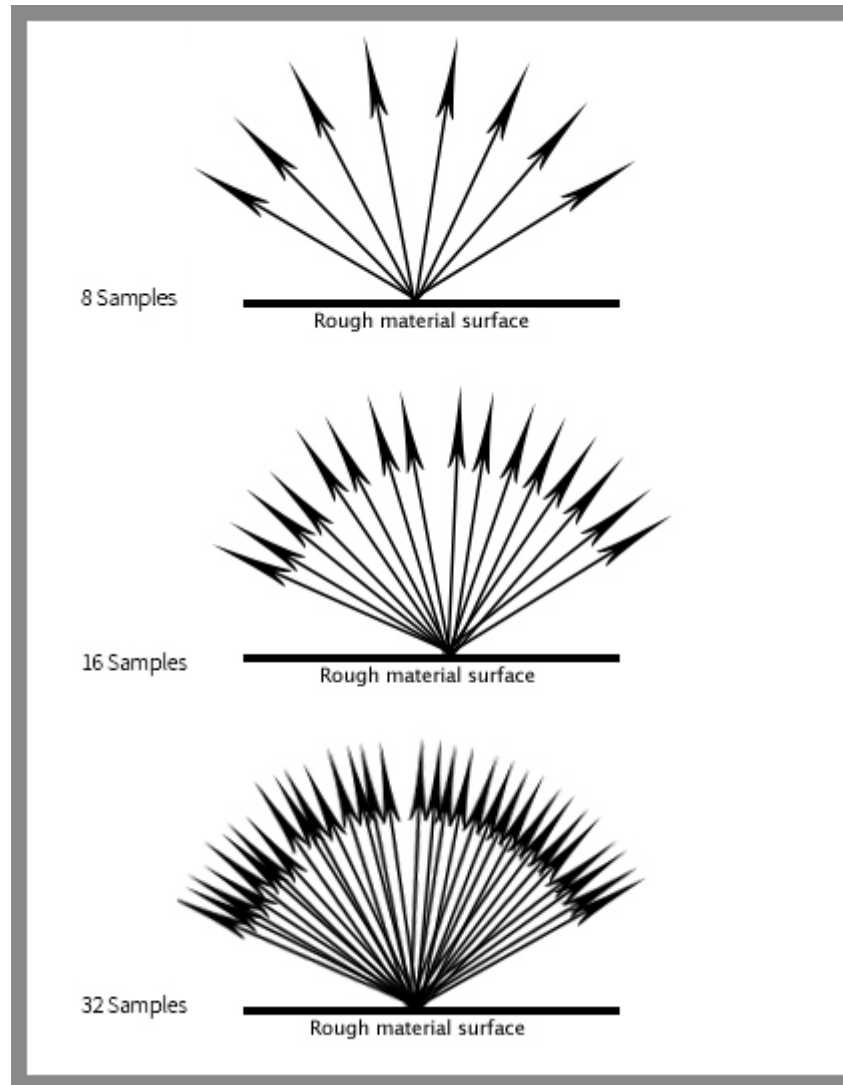

Increasing samples

Roughness Texture

If the Roughness parameter has a checkered box  next to it, this means

a texture can be applied to control the glossy appearance of the surface. When a texture is applied, dark areas of the texture will have a glossy appearance and white areas of the texture will have a matte appearance.

Read more on the difference between Roughness Textures and Bump Maps [here](#).

Material Types

Material Types bring the power to quickly apply real world, physically accurate material properties to your parts. Each Material Type comes preset with settings to quickly apply or change material with the option to adjust each setting as desired. There are five categories of KeyShot Material Types:

Basic	Advanced	Light Sources	Special	Other
- Diffuse - Flat - Glass - Glass (Solid) - Liquid - Metal - Paint - Plastic - Thin Film - Translucent	- Advanced - Anisotropic - Dielectric - Gem - Measured - Metallic Paint - Multi-Layer Optics - Plastic (Cloudy) - Plastic (Transparent) - Scattering Media - Translucent (Advanced) - Velvet	- Area Light - Point Light - IES Light - Spotlight	- Cutaway - Emissive - Ground - Toon - Wireframe - Xray	Axalta Paint

Change material type

This quicktip shows how to change the material type of all parts in the scene in one action. It was made for a previous version of Keyshot, so some elements have changed (e.g. Model Sets) but the overall tip may still be useful.

Diffuse

The *Diffuse* material type is useful for easily creating any kind of matte or non-reflective material. It has only one setting, the diffuse color. Since it is an entirely diffuse material, specular maps are not available.

Color

This setting controls the color of the diffuse material. Select the color box to display the Color Picker and select the desired color.

Flat

The *Flat* Material Type is a very simple material type that produces an unshaded, perfectly even color over the entire part to which it is applied.

This material is often used as a black-out material behind car grills or other meshes. It is also useful to create “Clown Pass” areas, which has uniquely colored flat materials applied to the different parts of a model so that these solid colors can be used to easily create selections in an image editing software. See [Layers and Passes](#) to automatically create a Clown Pass.

Color

Click the color thumbnail to launch the Color Picker, which allows you to select the color of the material. The flat material has no shading or other surface properties. It will show the solid color you have selected over the entire part that the material is applied to.

Glass

This is a simple Material Type for creating glass materials.

Compared to the [Solid Glass](#) material, this material type lacks the roughness and color density settings. However, it adds the two-sided option which is very useful when you have a part that is just a single surface (no thickness) and you want to make it reflective and transparent, but not refractive. This is commonly used for car windshields.

Color

This sets the overall color of the glass material. Click the color box to open the Color Picker and select your desired color.

Refractive Index

This controls how much light will bend or “refract” as it passes through parts that have this type of material. The default of 1.5 is accurate for simulating most types of glass, but you can increase the value to create a more dramatic refraction within the surface.

Refractive

This can enable or disable the refractive property of the material. When enabled, the material will appear refractive. When it is disabled, the material will not be refractive. You will see reflections on the surface and the surface will be transparent, but light will not bend as it passes through the surface. Disabling this option is very useful when you want to see things that lay behind a surface without the distorted effect that results from refraction.

Glass (Solid)

The *Glass (Solid)* Material Type provides a physically accurate glass material. Unlike the simpler glass material type, you will find that solid glass simulates the effect color in the glass accurately as it takes into account the thickness of your model.

Color

This controls the overall color of this material type. When light enters the surface, it will take on the color set here. The amount of color that you see in this material is highly dependent on the transparency setting as well. If you have set a color, but it looks too faint, skip down to the transparency section.

Transparency Distance

(Formerly *Color Density*) This slider controls the depth of the color selected in the *Color* setting, depending on the thickness of the part to which the material is applied. After setting a color in the *Color* setting, use *Transparency Distance* to make that color more or less saturated and prominent. A lower setting will show the color more in thin areas of the model, and a high setting will make the color faint in the thin areas.

This physically accurate parameter simulates the effect you can observe by looking at the color of the shallow water at a beach versus the deep blue of a deep ocean. Without this you would see through to the bottom of the deepest ocean as easily as to the bottom of a swimming pool.

Refractive Index

This controls how much light will bend or “refract” as it passes through parts on your model that have this type of material. The default of 1.5 is accurate for simulating most types of glass, but you can increase the value to create a more dramatic refraction within the surface.

Roughness

Roughness on this type of material will spread out highlights on the surface similar to what you see on other, non-transparent, materials. However, it also spreads out the light that is transmitted through the material. This is used to create a frosted glass look. Expand this parameter and you will see a samples setting. This can be set to a low value to produce a more imperfect/noisy result or to a higher value to smooth out the noise/grain for a smoother frosted look.

Samples

A low samples setting (8 or lower) will tend to make the surface look more noisy, which will give a more imperfect and rough look. As you increase the value, the noise will even out more and provide a more evenly distributed roughness.

Liquid

The *Liquid* Material Type is a variant of the [Solid Glass](#) material that has the added ability to set the outside refractive index. This allows you to accurately create surfaces that represent the interface between, for example, a glass container and water. See description [here](#).

Color

This controls the overall color of this material type. When light enters the surface, it will take on the color set here. The amount of color that you see in this material is highly dependent on the transparency setting as well.

Transparency Distance

This slider controls the depth of the color selected in the *Color* setting, depending on the thickness of the part to which the material is applied. After setting a color in the *Color* setting, use *Transparency Distance* to make that color more or less saturated and prominent. A lower setting will show the color more in thin areas of the model, and a high setting will make the color faint in the thin areas.

This physically accurate parameter simulates the effect you can observe by looking at the color of the shallow water at a beach versus the deep blue of a deep ocean. Without this you would see through to the bottom of the deepest ocean as easily as to the bottom of a swimming pool.

Refractive Index

This controls how much light will bend or “refract” as it passes through parts that have this type of material.

Advanced

Color Out

This option controls the color of the light on the outside of the material. It is an advanced and complex setting, but it is needed when rendering containers with liquid. In the example of a water glass, you will need to have a dedicated surface for where the liquid and glass meet. On this surface, you should set the color of the glass with the transmission out setting and control the color of the liquid with the transmission setting. If the glass and liquid are both clear, set both transmission and transmission out to white.

Refractive Index Outside

This is an advanced, but powerful, setting that allows you to accurately simulate the interface between two different refracting materials. The most common use for this is when you are working on a container with liquid inside, like a water glass. In such a scene you will need a single surface to represent where the glass and water meet. On this surface, you have the liquid on the “inside” and therefore, you should set the refractive index to 1.33. On the “outside,” you have the glass, and you should set the refractive index outside to 1.5.

Liquid interfaces

With Keyshot 8 we have improved the handling of liquid interfaces - so you no longer have to split your liquid geometry and set the refractive index separately. Now you can use any material e.g. glass or cloudy plastic to create your liquids. All you have to make sure is that the liquid and the glass geometry overlap ever so slightly.

Type: Liquid

Properties Textures Labels

Color

Transparency Distance 0,01

Refractive Index 1,334

Advanced

Color Out

Refractive Index Outside 1



*Liquid interfaces done in Keyshot 8, with overlapping geometry.
Rendering from the ice_water.ksp demoscene.*

Metal

The *Metal* material type is a simple way to create polished or rough looking metal materials. It provides quick color adjustment, metal presets and simple settings for quick creation of metal materials.

Metal Type

The Metal material type gives you the option to control the metal by *Color* or by *Measured* material preset or complex IOR file.

Color

The Color option provides a quick preset metal appearance with control over *Color* and *Roughness*.

Color

This setting is visible when *Metal Type* is set to *Color*. This controls the color of reflected light on the metal surface. Select the color box to display the Color Picker and select the desired color.

Roughness

This adds microscopic levels of imperfections to the surface of the material when the values are increased. When this is set to 0, a material will appear perfectly smooth and polished. When the value is increased, the material will appear more rough as light is diffused across the surface.

You can also add a roughness texture by clicking the  texture icon next to the roughness setting. Click the texture thumbnail to view and adjust the texture settings or right-click and select *Delete* to remove it.

Some of the Library materials have a slider icon  next to the Roughness setting, in these cases extra adjustment controls have been added for finer tuning of the roughness.

Samples

A low samples setting (8 or lower) will tend to make the surface look more noisy, which will give a more imperfect and rough look. As you increase the value, the noise will even out more and provide a more evenly distributed roughness.

Measured

Metal Presets

The *Measured* options includes 13 scientifically accurate metal presets including *Aluminum*, *Brass*, *Chromium*, *Copper*, *Gold*, *Iron Magnesium*, *Nickel*, *Niobium*, *Platinum*, *Silver*, *Titanium*, and *Zinc*, along with the ability to load Complex IOR files (.ior, .nk, .csv). All metal presets and Custom IOR files provide the additional ability to add an anodized coating with control of *Film Refractive Index*, *Film Extinction Coefficient*, and *Film Thickness*.

Roughness

This adds microscopic levels of imperfections to the surface of the material when the values are increased. When this is set to 0, a material will appear perfectly smooth and polished. When the value is increased, the material will appear more rough as light is diffused across the surface.

Samples

A low samples setting (8 or lower) will tend to make the surface look more noisy, which will give a more imperfect and rough look. As you increase the value, the noise will even out more and provide a more evenly distributed roughness.

Anodized

Anodized settings are available for all metal presets selected from the *Metal Type* dropdown as well as loaded Complex IOR files. The colors you see when *Anodized* is enabled are the result of light interfering with itself in the anodized film and can therefore be hard to predict the outcome. However, the following setting descriptions will help you learn better how to control it.

On this page
- Metal Type - Color - Measured

Film Refractive Index

The *Film Refractive Index* setting for anodized metals provides more or less reflection on the surface. Increase the value to get more reflection intensity. The actual film color will be affected by the *Refractive Index*. However, you can shift the colors with the *Film Thickness* setting, so typically you will focus only on finding the desired amount of reflection with the *Film Refractive Index* setting.

Film Extinction Coefficient

The *Film Refractive Index* and *Film Extinction Coefficient* determines how light reflects and refracts through the thin film on the metal. The *Film Extinction Coefficient* controls the absorption of light through the film. For small to moderate values, a positive extinction coefficient will darken the color but large values will lead to a bright white metallic reflection. Use an extinction coefficient of 0 for dielectric coatings and use a non-zero extinction coefficient for metallic coatings.

Film Thickness

Changing the *Film Thickness* setting will shift the colors you see for the metal with *Anodized* enabled. Increasing the setting to a very high value will result in the effect of layers of colored rings on the surface. It is generally a good idea to stay within a range of 100-1000 nm.

Controlling Anodized Color

In general, a larger *Film Thickness/Refractive Index* leads to more colors and an *Film Extinction Coefficient* will darken colors and dampen variation. For all the metal presets, even if anodized is enabled or not, the color can depend on the viewing angle (just as with the color of real-world metals). You will notice slight color tints at grazing angles, especially for Gold and Aluminum.

Paint

The *Paint* Material Type is used when a plain, non-metallic paint appearance is desired. It provides a quick way to set a base color and then control the clear-coat on top.

Color

Color is your base layer of paint and the overall color of the material. Click the color thumbnail to open the Color Picker and select your desired color.

Roughness

This will add microscopic levels of imperfections to the surface of the material when the values are increased. When this is set to 0, a material will appear perfectly smooth and polished. When the value is increased, the material will appear more rough as light is diffused across the surface.

Samples

A low samples setting (8 or lower) will tend to make the surface look more noisy, which will give a more imperfect and rough look. As you increase the value, the noise will smooth out and provide a more evenly distributed roughness.

Refractive Index

This controls the intensity of the clear-coat. 1.5 is a good general starting point. If a more shiny paint is desired, increase the value. Bringing the value down closer to 1 reduces the clear coat effect. This can be useful for making a matte finish.

Plastic

The *Plastic* Material Type provides the basic settings needed to create simple plastic materials. Set the diffuse (overall color) and add some specular (reflections), then adjust the roughness. This is a very versatile material type that is used for anything from concrete to woods.

Diffuse

This can be thought of as the overall color of the material. Click the color box to open the Color Picker and select your desired color.

Specular

This is the color and intensity of the reflection of light sources within the scene. Black will completely turn off reflections, while white will provide a very shiny plastic look. Realistic plastic does not have color in the specular value, so generally you should use some level of gray or white. However, adding color can give the plastic material a metallic effect.

Roughness

This will add microscopic levels of imperfections to the surface of the material when the values are increased. When set to 0 a material will appear perfectly smooth and polished. When the value is increased, the material will appear more rough as light is diffused across the surface.

Refractive Index

This controls how much light will bend or “refract” as it passes through parts that have this type of material. The default of 1.5 is accurate for simulating most types of plastics, but you can increase the value to create a more dramatic refraction within the surface.

Thin Film

The *Thin Film* material type produces an iridescent effect similar to a soap bubble.

Refractive Index

The *Refractive Index* setting for *Thin Film* provides more or less reflection on the surface. Increase the value to get more reflection intensity. The actual colors you see in the thin film will be affected by the *Refractive Index*. However, you can shift the colors with the *Thickness* setting, so typically you will focus only on finding the desired amount of reflection with the *Refractive Index* setting.

Thickness

Changing the *Thickness* setting will shift the colors that you see on the surface set as *Thin Film*. Increasing the setting to a very high value will result in the effect of layers of colored rings on the surface. It is generally a good idea to stay within a range of 100-1000.

Color Filter

The *Color Filter* setting acts as a color multiplier for the *Thin Film* material type. When the *Color Filter* is set to white the color of the material will be determined by the *Thickness* setting. Less saturated colors can be used to add subtle hue shifts while fully saturated colors have a greater influence. The *Color Filter* setting can be textured with color maps to create material breakups such as those seen on solar cells or to add surface imperfections to an optical lens or automotive headlight.

Translucent

The *Translucent* material type provides control over subsurface scattering properties that are found in many skin, plastic and other materials.

Surface Color

This controls the diffuse color of the outer surface of the material. Consider this the overall color of the material. Something to be aware of with this unique material type is that you will not see the translucent effect of the subsurface color if the surface color is completely black.

Subsurface Color

This setting controls the color that light will take on as it passes through the material. Your own skin is a great example of the subsurface scattering effect. When a bright light shines through the thin parts of an ear or the thin skin between fingers, the light is colored by what lies beneath the surface and comes back more red.

While the light is passing through the surface, it is bounced around in many random directions. This creates the soft translucent effect rather than the direct refraction effect of glass and similar materials.

For plastic materials, you will often set this color to something very similar to the surface color, but perhaps a bit brighter.

Translucency

This controls how deep light penetrates into and through the surface depending on the units set under *Edit, Set Scene Units*. The higher your translucency value, the more of the subsurface color you will see coming through the surface. Higher translucency values will also create a softer looking material.

Texture

This affects the *Surface Color* setting. This color multiplies and blends the surface color. For instance, when the *Surface Color* is yellow and the *Texture Color* is blue, the result will be green. When set to white, it will not affect the surface color.

Specular

This controls the intensity of the reflections on the surface. This works together with the *Refractive Index* setting to further increase or decrease the strength of the reflections on the surface.

Roughness

Increasing roughness will spread and distribute reflections over the surface and create a more matte surface.

Advanced

Refractive Index

This controls how much light will bend or refract as it hits and passes through parts that have this type of material. The default of 1.4 is a good starting point, but you can increase the value to create a more dramatic refraction within the surface.

Samples

A low samples setting (8 or lower) will tend to make the surface look more noisy, which will give a more imperfect and rough look. As you increase the value, the noise will even out more and provide a more evenly distributed roughness.

Global Illumination

This options enables *Global Illumination* for the material independent of the *General Lighting* setting for *Global Illumination*.

Advanced

The *Advanced* material is the most versatile of all KeyShot material types. There are more parameters in this material than in any other. With this variety of parameters, materials such as metals, plastics, transparent or cloudy plastics, glass, leathers and diffuse materials can all be created from this single material type. Material types that cannot be created are translucent materials and metallic paints.

Diffuse

This can be thought of as the overall color of the material. Transparent materials will have little or no diffuse. Metals will have no diffuse with all the color derived from the specular. To fully understand this parameter see the section on diffuse.

Specular

This is the color and intensity of the reflection of light sources within the scene. Black will be 0% intensity and the material will not be reflective. White will be 100% intensity and will be completely reflective. If a plastic material is being created, the specular color should be gray to reduce reflectivity.

Ambient

This will control the color of self shadowing on the material in areas that are not receiving direct light. It can produce unrealistic looks, so it is recommended to keep this set to black unless it is needed.



On the left the material has a green ambient color - on the right the ambient color is black.

Roughness

This will add microscopic levels of imperfections to the surface of the material when the values are increased. When set to 0, a material will appear perfectly smooth and polished. When the value is increased, the material will appear more rough as light is diffused across the surface.

Type: Advanced

Properties

Textures

Labels

Diffuse 

Specular 

Ambient 

Roughness 


Refractive Index 


Diffuse Transmission 

Specular Transmission 

Roughness Transmission 


Samples


☒ Fresnel

☐ Use Diffuse Map Alpha

Opacity Mode None



On the left the material has a roughness of 0 - on the right it is 0,04.

Refractive Index

This will control the level of refraction on the material.



On the left the refractive index is 1,3 - on the right it is 2,3

Diffuse Transmission

This will cause additional light to be scattered across the surface of the material, which can simulate a translucent effect. It will increase render time, so if it is not needed, the recommendation is to leave it at black.

Specular Transmission

This can be thought of as the transparency of the material. Black will be 100% opaque and white will be 100% transparent.

If a transparent glass or plastic is being created, the diffuse should be black with all the color derived from this parameter. Transparent glasses or plastics should also have the specular set to white. If a cloudy plastic is desired, the diffuse can be set to a very dark version of the color set here.

Roughness Transmission

This will control the roughness of the refraction. The main difference between this parameter and roughness is that roughness is on the internal portion of the material. This can be used to create a frosted look while still maintaining a shiny surface. The material needs to have some transparency through the specular transmission for the effect to show.

Samples

This will control the accuracy of glossy (rough) reflections by increasing the samples that are used.

Fresnel

This will control the intensity of the reflections that are perpendicular to the camera. In the real world, materials are more reflective around the edges of objects than they are on areas of objects that are directly facing the viewer or camera. This is enabled by default.



The material on the left has Fresnel checked - the one on the right does not.

Use Diffuse Map Alpha

This setting is present for legacy purposes. If you want to have opacity maps on your material, please use the opacity texture.

Anisotropic

The *Anisotropic* material type gives you advanced control over the highlights on the material surface. On other material types that have a single "Roughness" slider, increasing this value causes the highlights on the surface spread out evenly in all directions. Anisotropic gives you control over the highlight shape by controlling the roughness in two directions with two independent sliders. This material type is often used to simulate a finely brushed metal surface.

Color

When trying to create a metal, the diffuse should be set to black. When set to anything other than pure black, this material type will take on more a plastic look.

Specular

This is the color and intensity of the reflection of light sources within the scene. Black will be 0 intensity and the material will not be reflective. White will be 100% intensity and will be completely reflective.

If a metal material is being created, this is where the color is set.

Roughness X and Y

These sliders control the spread of the highlights on the surface. The X and Y roughness sliders control the highlight spread in independent directions. As you offset the values, the highlights on the surface will stretch out and give a finely brushed effect.

Setting both sliders to the same value will yield reflections that are spread evenly in all directions. In the image,



The material ball on the left has offset values and the right has equal values.

Angle

This rotates the stretched highlights that are produced when the roughness x and y values are offset. The value is in degrees and goes from 0 to 360.

Type: Anisotropic

Properties


Textures

Labels

Diffuse



Specular



Roughness X





Roughness Y





Angle



 Position Texture


 Reset

Mode

Linear

Samples



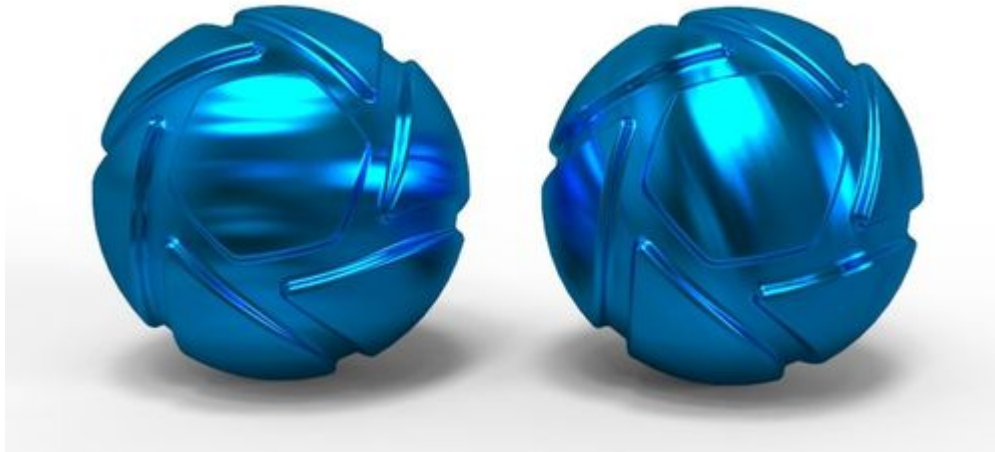


The material ball on the left has an angle of 0 and the right an angle of 90.

Mode

This advanced setting controls how the highlights are stretched. There are three unique modes.

- Linear (default) which will stretch highlights in a linear way, and is independent of any UV coordinate mapping you may have on the model.
- Radial mode is an anisotropic method which simulates the effect you might observe on the play side of a CD. Enabling this mode allows you to choose the center point of the radial roughness with the
- UV mode is dependent on your UV coordinates. You can use this to manipulate the anisotropic highlights based on the mapping from your modeling software.

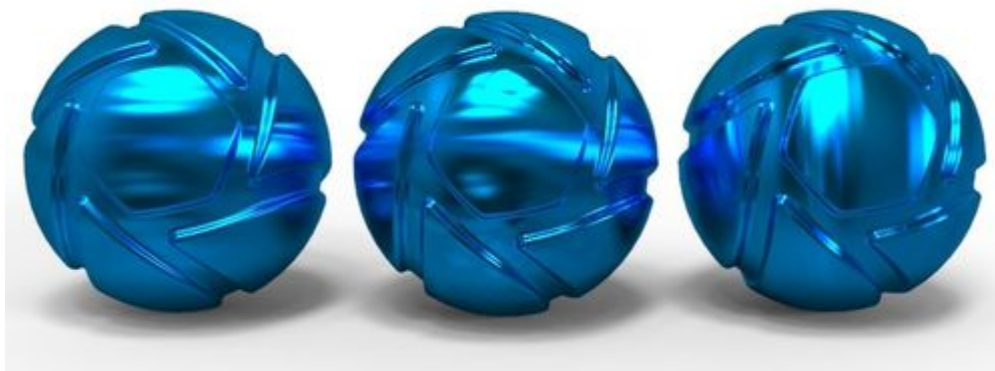

Linear, Radial and UV mode.

Samples

A low samples setting (8 or lower) will tend to make the surface look more noisy which will give a more imperfect and rough look. As you increase the value the noise will even out more and provide a more evenly distributed roughness.

Dielectric

The *Dielectric* material type is a more advanced way to create glass materials. Compared to the [Solid Glass Material Type](#), you will find additional settings for dispersion (*Abbe Number*) and it can also be used to create an accurate interface between glass and liquid.

Transmission

This option controls the overall color of this material type. When light enters the surface it will take on the color set here. The amount of color that you see in this material is highly dependent on the *Transparency Distance* setting as well. If you have set a color in the transmission, but it looks too faint, try to decrease the *Transparency Distance*.

Transparency Distance

This slider controls the depth of the color selected in the *Transmission* setting, depending on the thickness of the part to which the material is applied. After setting a color in the *Transmission* setting, use *Transparency Distance* to make that color more or less saturated and prominent. A lower setting will show the color more in thin areas of the model, and a high setting will make the color faint in the thin areas.

This physically accurate parameter simulates the effect you can observe by looking at the color of the shallow water at a beach versus the deep blue of a deep ocean. Without this you would see through to the bottom of the deepest ocean as easily as to the bottom of a swimming pool.

Refractive Index

This slider controls how much light will bend or refract as it passes through parts on your model that have this type of material. The default of 1.5 is accurate for simulating most types of glass, but you can increase the value to create a more dramatic refraction within the surface.

Transmission Out

This option controls the color of the light on the outside of the material. It is an advanced and complex setting, but it is needed when rendering containers with liquid. In the example of a water glass, you will need to have a dedicated surface for where the liquid and glass meet. On this surface, you should set the color of the glass with the transmission out setting and control the color of the liquid with the transmission setting. If the glass and liquid are both clear, set both transmission and transmission out to white.

Refractive Index Outside

This slider is an advanced but powerful setting that allows you to accurately simulate the interface between two different refracting materials. The most common use for this is when you are working on a container with liquid inside, like a water glass. In such a scene, you will need a single surface to represent where the glass and water meet. On this surface, you have the liquid on the “inside,” and therefore you should set the refractive index to 1.33. On the “outside,” the glass the refractive index outside should be set to 1.5.

Roughness

Roughness on this type of material will spread out highlights on the surface similar to what you see on non-transparent, materials. However, it also spreads out the light that is transmitted through the material. This is used to create a frosted glass look.

Expand this parameter, and you will see a samples setting. This can be used with a low setting to produce a more imperfect/noisy result or a higher value to smooth out the noise/grain for a smoother frosted look.

Samples

A low samples setting (8 or lower) will tend to make the surface look more noisy, which will give a more imperfect and rough look. As you increase the value, the noise will even out more and provide a more evenly distributed roughness.

Abbe Number (Dispersion)

The image shows a software interface for configuring a 'Dielectric' material. The 'Type' dropdown is set to 'Dielectric'. The interface is divided into three tabs: 'Properties' (selected), 'Textures', and 'Labels'. The 'Properties' tab contains several settings:

- Transmission:** A color selection area with a blue square and a color picker.
- Transparency Distance:** A slider and a numeric input field set to 1,135.
- Refractive Index:** A slider and a numeric input field set to 2,038.
- Transmission Out:** A color selection area with a white square and a color picker.
- Refractive Index Outside:** A slider and a numeric input field set to 1.
- ▼ Roughness:** A slider and a numeric input field set to 0,0114.
- Samples:** A slider and a numeric input field set to 16.
- ▼ Abbe Number (Dispersion):** A slider and a numeric input field set to 39,2.
- Dispersion Samples:** A slider and a numeric input field set to 3.
- Roughness Transmission:** A slider and a numeric input field set to 0,024.

The Abbe number slider controls dispersion of light as it is transmitted through the surface and produces a prismatic effect. This prismatic color effect can be used to create the "fire" effect often desired when rendering gem stones.

A value of zero will disable the dispersion effect entirely. A low value will show heavy dispersion, and as you increase the value, the effect will become more subtle. A setting around 35-55 is a good starting point if a subtle dispersion effect is desired.

Dispersion Samples

A low samples setting (8 or lower) will produce a more imperfect/noisy result while a higher value will smooth out the noise/grain and give a smoother look.

Roughness Transmission

This will control the roughness of the refractions. The main difference between this parameter and roughness is that the roughness is on the internal portion of the material. This can be used to create a frosted look while still maintaining a shiny surface. The material needs to have some transparency through the specular transmission for the effect to show.

Gem

The *Gem* Material Type is related to the Solid Glass, Dielectric, and Liquid Material Type. The settings have been optimized to be relevant to rendering gem stones. The *Abbe Number* (dispersion) control is especially important for gem stone rendering as it produces the “fire” effect that is often desired.

Color

This controls the overall color of the gemstone. When light enters the surface it will take on the color set here. The amount of color you see in this material is highly dependent on the transparency setting as well.

Transparency Distance

(Formerly *Transparency*) This slider controls the depth of the color selected in the *Color* setting, depending on the thickness of the part to which the material is applied. After setting a color in the *Color* setting, use *Transparency Distance* to make that color more or less saturated and prominent. A lower setting will show the color more in thin areas of the model, and a high setting will make the color faint in the thin areas.

This physically accurate parameter simulates the effect you can observe by looking at the color of the shallow water at a beach versus the deep blue of a deep ocean. Without this you would see through to the bottom of the deepest ocean as easily as to the bottom of a swimming pool.

Refractive Index

This controls how much light will bend or “refract” as it passes through parts on your model that have this type of material. The default of 1.5 (the Refractive Index of Lapis Lazuli) is a general setting and will need adjusted depending on the gem you desire. A [Table of Refractive Index for Gemstones](#) can be found on the International Gem Society website.

Roughness

Roughness on this type of material will spread out highlights on the surface similar to what you see on other, non-transparent, materials. However, it also spreads out the light that is transmitted through the material. This is used to create a frosted glass look.

Samples

This can be used with a low setting to produce a more imperfect/noisy result or a high setting to smooth out the noise/grain for a smoother frosted look.

Abbe Number (Dispersion)

The Abbe number controls dispersion of light as it is transmitted through the surface and produces a prismatic effect. This prismatic color effect can be used to create the “fire” effect often desired when rendering gem stones. A value of zero will disable the dispersion effect entirely. A low value will show heavy dispersion, and as you increase the value, the effect will become more subtle. A setting around 35-55 is a good starting point if a subtle dispersion effect is desired.

Dispersion Samples

This can be used with a low setting to produce a more imperfect/noisy result or a higher value to smooth out the noise/grain for a smoother look.

Ignore intersecting geometry

When enabled overlapping geometry will be ignored. This is useful for e.g. the prong setting of diamond ring, where the real life deformation made to the prongs when fixing the gemstone is not modeled and the geometry is in fact overlapping,

The image shows a software interface for configuring a 'Gem' material. At the top, a dropdown menu is set to 'Gem'. Below this are three tabs: 'Properties' (selected), 'Textures', and 'Labels'. The 'Properties' tab contains several settings:

- Color:** A color selection box.
- Transparency Distance:** A slider and a text input field showing '0,01'.
- Refractive Index:** A slider and a text input field showing '2,418'.
- ▼ Roughness:** A dropdown arrow, a small square icon, and a text input field showing '0'.
- Samples:** A slider and a text input field showing '16'.
- ▼ Abbe Number (Dispersion):** A dropdown arrow, a slider, and a text input field showing '30'.
- Dispersion Samples:** A slider and a text input field showing '16'.

At the bottom of the panel is a checkbox labeled 'Ignore Intersecting Geometry'.

Measured

The *Measured* material type supports the import of the X-Rite Appearance exchange Format (AxF) and Radiance BSDF format. These formats contain vendor neutral digital material representations that capture the light scattering characteristics for specific physical materials.

The X-Rite AxF Material Format

AxF is a digital file format developed by X-Rite that delivers a standardized appearance representation. AxF materials are created from physical material samples scanned using an X-Rite TAC7 Scanner which captures and creates the accurate digital material specifications in the AxF file. AxF files can be accessed from digital material catalogs such as the PatoneLIVE Cloud and imported directly into KeyShot using a Measured material type. Learn more about AxF and how to create them at xrite.com/axf/.

 [Download AxF sample files from X-Rite](#)

The Radiance XML BSDF Format

BSDF (bidirectional scattering distribution function) is a mathematical model used to describe light interactions with surfaces. Developed for the Radiance Renderer, the BSDF file format supported in KeyShot is an XML format containing measured BSDFs defining the distribution function that dictates how the light is scattered and how the material appears.

Importing Measured Materials

While editing a material in the *Projects*, *Material* tab, select *Measured* from the *Material Type* dropdown, the part will appear black and a *File* location field will appear in the *Properties* tab. Select the folder icon  to select a measured file format. Both the .axf and .xml file extensions are supported.

On this page

- [The X-Rite AxF Material Format](#)
- [The Radiance XML BSDF Format](#)
- [Importing Measured Materials](#)

Metallic Paint

The *Metallic Paint* material type simulates a two-layer paint job: a base coat and a clear-coat that provides a clean reflection over the entire material.

Paint Settings

Base Color

This is the overall color of the material for the base coat of paint.

Metal Color

This can be thought of as a coat of metal “flakes” sprayed over the base coat. You can choose a color that is similar to base color to get a subtle metal flake effect, or you can choose a contrasting color to get some interesting results. A white or gray metal color is also commonly used for realistic paints. The metal color in the material will show more in the directly lit or brightly highlighted areas of the surface while the base color will show more in the less illuminated areas.

Metal Coverage

This controls the ratio of base color to metal color. When it is set to 0, you will see only the base color. When it is set to 1, the surface will be almost entirely covered in the metal color. For most metallic paint materials, you will want this value set close to 0. A setting of 0.25 is the default and a good starting point.

Metal Roughness

This controls the spread of the metal color over the surface. When it is set to a low value, you will see the metal color only in small areas around the highlight areas. When it is set higher, the metal will spread more evenly across the entire surface. A setting of 0.15 is the default and a good starting point.

Metal Flake Size

Controls the size of the metal flakes - extremely large values recreate a "bass boat" paint.

Metal Flake Visibility

Controls the opacity of the metal flakes, on a scale from 0 - 1.

Samples

This will control how imperfect or refined the metal effect in the paint will look. A low setting will result in a more noticeable “flake” effect. A higher setting will smooth out the distribution of the metal effect, and it will have less noise/grain. When seeking a pearl effect, use a higher setting.

Clear-coat Settings

The clear-coat settings control the top clear-coat layer. Settings are unit-aware and can have a bump map applied that does not affect the base coat.

Clear-coat Color

Sets the color for the clear-coat layer. The lighter the color, the lighter the clear-coat. The default is white (completely clear).

Clear-coat Roughness

The metallic paint clear-coat layer, by default, provides perfectly clean reflections. However, if a satin or matte paint effect is desired, the clear-coat roughness value may be increased. This will spread out the reflections on the surface for a matte look.

Clear-coat Refractive Index

This slider controls the intensity of the clear-coat. 1.5 is the default and a good starting point. If a more shiny paint is desired, increase the value. Bringing the value down, closer to 1, reduces the clear-coat effect. This can be useful for making a matte finish or simulating plastics that have a metallic flake effect.

On this page:

- [Paint Settings](#)
- [Clear-coat Settings](#)

Clear-coat Thickness

Sets the thickness of the clear-coat. This is set as a thickness multiplier that can be textured. A higher value will darken the clear-coat. This setting can be textured by clicking on the texture icon next to the setting. This will override the value and provide additional settings for the texture type selected.

Clear-coat Bump

Right-click on the  icon to add a texture to the Clear-coat Bump. This will only affect the Clear-coat layer while adding a Bump through the Textures tab will affect both the base and the clear-coat.


Type: Metallic Paint

Properties

Textures

Labels

Base Color

Metal Color

Metal Coverage





▼ Metal Roughness





Metal Flake Size





Metal Flake Visibility





Samples



▼ Clear-coat

Clear-coat Color

Clear-coat Roughness





Clear-coat Refractive Index





Clear-coat Thickness





Clear-coat Bump



Multi-Layer Optics

Layer list

Lists all layers of the material. Note that the first layer is the "base" layer (substrate).



Add layer

You can either add a layer from a file, add a new dielectric layer or add a



Delete layer

This will delete the current layer from the layer list, but the definition will still be available in the *Layer Material* dropdown.

Layer properties

These properties apply to the layer that is highlighted in the Layer list

- **Layer Thickness** Set the thickness of the layer. The thickness of first layer can not be set, as it is the main material (substrate) of the part.
- **Layer material** Select the material for the layer. The list contains all the materials you have had in the list, also ones from layers that have been deleted. The  next to the material drop-down will delete the specification of the current material and replace all instances.
- **Material Name** Here you can edit the name of the material, note that the name will change the name of the material not the layer.
- **Refractive index** This slider controls how much light will bend or refract as it passes through the material. The default of 1,5 is accurate for simulating most types of glass.
- **Abbe Number** The Abbe number controls dispersion of light as it is transmitted through the surface and produces a prismatic effect. A value of zero will disable the dispersion effect entirely. A low value will show heavy dispersion, and as you increase the value, the effect will become more subtle. A setting around 35-55 is a good starting point if a subtle dispersion effect is desired.

Edit specification

Allows you to enter/edit the entire material, including all layers in plain text.

Encrypt Specification

If you want to protect the specifications of your material, you can encrypt it. This will hide information about the layers in the material and the material can no longer be edited.

When the material is encrypted you can *Clear Specification*. This will delete the specification of the the current material and let you start from scratch. Encrypted materials can not be un-encrypted!

Color

This option controls the overall color of this material type. When light enters the surface it will take on the color set here.

Transparency Distance

This slider controls the depth of the color selected in the *Transmission* setting, depending on the thickness of the part to which the material is applied. After setting a color in the *Transmission* setting, use *Transparency Distance* to make that color more or less saturated and prominent. A lower setting will show the color more in thin areas of the model, and a high setting will make the color faint in the thin areas.

This physically accurate parameter simulates the effect you can observe by looking at the color of the shallow water at a beach versus the deep blue of a deep ocean. Without this you would see through to the bottom of the deepest ocean as easily as to the bottom of a swimming pool.

Refractive Index Outside

Type:

Multi-Layer Optics

Properties

Textures

Labels

+

Material

Thickness

aluminum arsenide (98)

50 nm

Dielectric #1

N/A

...

Layer Thickness

50 nm

Layer Material

aluminum arsenide

+

−

Material Name

aluminum arsenide (98)

Edit Specification

Encrypt Specification

Color

Transparency Distance

0,05

Refractive Index Outside

1

☐ Simulate Substrate Dispersion

This slider is an advanced but powerful setting that allows you to accurately simulate the interface between two different refracting materials.

Simulate Substrate Dispersion

Enabling this will simulate caustics in the substrate if it is a transparent material.

You can learn more about Caustics on the [Refractive Index](#) page.

Plastic (Cloudy)

The *Plastic (Cloudy)* material contains light-scattering particles to replicate complex, scientifically accurate materials such as Polycarbonate or ABS. This material has parameters to control light *Transmission*, *Roughness*, *Refractive Index*, *Transparency Distance* and *Cloudiness*. When editing an existing material select *Plastic (Cloudy)* from the *Material Type* drop-down.

Transmission

This sets the overall light transmission of the cloudy plastic material. A lighter color will allow more transmission. A darker color will provide less transmission. Click the color thumbnail to open the color picker then select your desired color.

Transparency Distance

Controls the distance at which the transparency is affected.

Cloudiness

This setting affects the overall cloudiness of the plastics. A value of 0 is no cloudiness at all.

Refractive Index

This controls how much light will bend or “refract” as it passes through parts that have this type of material. The default of 1.5 is accurate for simulating most types of plastic, but you can increase the value to create a more dramatic refraction within the surface.

Roughness

This will add microscopic levels of imperfections to the surface of the material when the values are increased. When set to 0, a material will appear perfectly smooth and polished. When the value is increased, the material will appear more rough as light is diffused across the surface.

Advanced

Cloudiness Color

This sets a specific color for the internal cloudiness of the plastic.

Scattering Directionality

Controls how the light is scattered. A value of 0 is uniform scattering, a negative value will scatter light backwards, a positive value with scatter light forwards.

Samples

A low samples setting (8 or lower) will tend to make the surface look more noisy, which will give a more imperfect and rough look. As you increase the value, the noise will even out more and provide a more evenly distributed roughness.

Type: Plastic (Cloudy) ▾

Properties

Textures

Labels

Transmission



Transparency Distance

Cloudiness



Refractive Index

Roughness



▼ Advanced

Cloudiness Color



Scattering Directionality



Samples

Plastic (Transparent)

The *Plastic (Transparent)* material provides the basic settings needed to create simple plastic materials. Set the diffuse (overall color) and add some specular (reflections), then adjust the roughness. This is a very versatile material type that is used for anything from concrete to woods.

Diffuse

This can be thought of as the overall color of the material. Transparent materials will have little or no diffuse color applied.

Specular

This is the color and intensity of the reflection of light sources within the scene. Black will completely turn off reflections, while white will provide a very shiny plastic look. Realistic plastic does not have color in the specular value, so generally you should use some level of gray or white. However, adding color can give the plastic material a metallic effect.

Roughness

This will add microscopic levels of imperfections to the surface of the material when the values are increased. When set to 0, a material will appear perfectly smooth and polished. When the value is increased, the material will appear more rough as light is diffused across the surface.

Samples

Within the roughness parameter, you will find a samples setting. A low samples setting (8 or lower) will tend to make the surface look more noisy, which will give a more imperfect and rough look. As you increase the value, the noise will smooth out and provide a more evenly distributed roughness.



*The material on the left has no roughness - the one on the right has a roughness of 0,15.
Base material: Clear Shiny Plastic Blue from the Material Library*

Diffuse Transmission

This will cause additional light to be scattered across the surface of the material which can simulate a translucent effect. It will increase render time, so if it is not needed, the recommendation is to leave it at black.

Type: Plastic (Transparent) ▾

Properties

Textures

Labels

Diffuse ☐

Specular ☐

▼ Roughness ☐

Samples

Diffuse Transmission ☐

Specular Transmission ☐

Refractive Index ☐



*The material on the left has black Diffuse Transmission Color - the one on the right has a red.
Base material: Clear Shiny Plastic Grey from the Material Library*

Specular Transmission

This can be thought of as the transparency of the material. Black will be 100% opaque and white will be 100% transparent.

If a transparent glass or plastic is being created, the *Diffuse Color* should be black with all the color derived from this parameter.

Transparent glasses or plastics should also have the specular set to white. If a cloudy plastic is desired, the *Diffuse Color* can be set to a very dark version of the color set here.



*The material on the left has grey Specular Transmission Color - the one on the right has a blue.
Materials: Clear Shiny Plastic Grey and Clear Shiny Plastic Blue from the Material Library*

Refractive Index

This controls how much light will bend or “refract” as it passes through parts on your model that have this type of material. Increase the value to create a more dramatic refraction within the surface.

Scattering Medium

With scattering medium you can simulate particle scattering to create such effects as fog or smoke or volumetric lighting such as visualizing beams or rays of light.

Applying Scattering Medium

In the *Project* window, *Material* tab, select *Scattering Medium* from the *Type* dropdown menu. Textures can be assigned to the *Density Texture* in the Textures tab. OpenVDB files can be loaded by selecting *Volume Map* from the *Texture* dropdown or via the Material Graph and applying it to *Density Texture* on the Scattering Medium material node.

Adjusting Scattering medium

Properties

Transmission

This option controls the overall color of this material type. When light enters the surface it will take on the color set here. The amount of color that you see in this material is highly dependent on the color density setting as well. If you have set a color in the transmission, but it looks too faint, skip down to the color density section.

Transparency Distance

This slider controls the depth of the color selected in the *Transmission* setting, depending on the thickness of the part to which the material is applied. Use *Transparency Distance* to make the *Transmission* color more or less saturated and prominent. A lower setting will show the color more in thin areas of the model, and a high setting will make the color faint in the thin areas.

Density

Determines how close the particles are - High Density values will make the scattering medium seem more solid, where a low density

Multiple Scattering

When checked the rays will bounce multiple times inside the geometry. This will create a more physically correct representation of the material, but it affects the processing time.

Advanced

Albedo

Albedo is the color of the light scattered by small particles inside the scattering medium. Note, that in media with *Multiple Scattering* the color of the medium may be the inverse of the albedo color, since the scattering process can prevent light from reaching the observer as it travels through the medium.

Scattering Directionality

Controls how the light is scattered. A value of 0 is uniform scattering, a negative value will scatter light backwards, a positive value with scatter light forwards.


Samples

A low samples setting (8 or lower) will tend to make the surface look more noisy, which will give a more imperfect and rough look. As you increase the value, the noise will even out more and provide a more evenly distributed roughness.

Textures

On this page

- [Applying Scattering Medium](#)
- [Adjusting Scattering medium](#)
 - [Properties](#)
 - [Advanced](#)
 - [Textures](#)
 - [Labels](#)

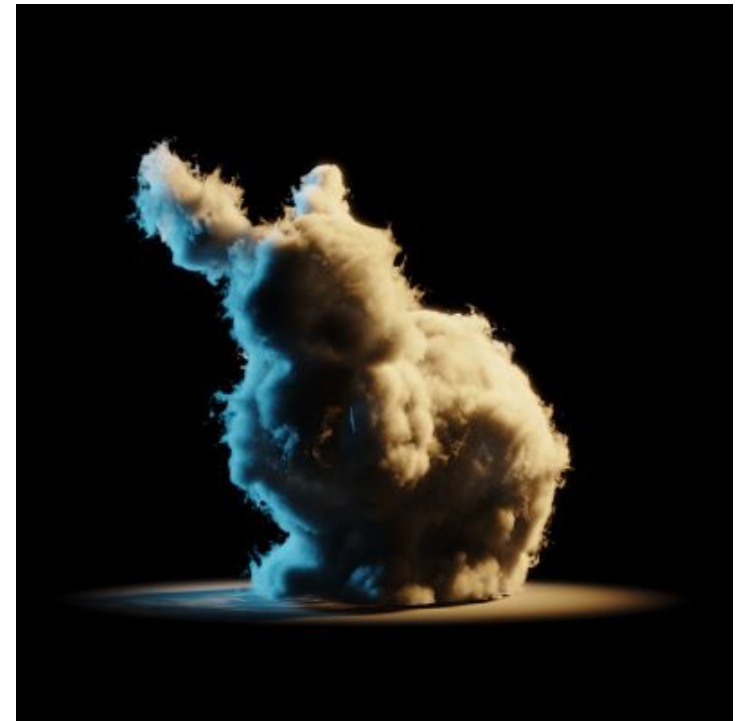

Scattering medium with a Volume map applied to the Density texture.

Density Texture

The density texture will act as a sort of mask on the material - where the texture is black, no particles will be shown and the amount of particles will increase where the texture is lighter. To use VDB filed on the density texture, add a [Volume Map](#).

Labels

With labels you can add another material onto the surface of the scattering medium. Control the label with the 4 primary [Map Types](#) - Diffuse, Specular, Bump and Opacity. - just make sure to add an opacity map when using a label - otherwise you won't be able to see the scattering medium.

Volume Caustics

Caustics work inherently with volumes (e.g. scattering media), however, caustics will only be applied to light sources outside the volume and this is only supported with interior mode.

Translucent (Advanced)

The *Translucent* material type provides control over subsurface scattering properties that are found in many skin, plastic and other materials. Compared to the *Translucent* material type, this generally will resolve faster.

Surface Color

This controls the diffuse color of the outer surface of the material. Consider this the overall color of the material. Something to be aware of with this unique material type is that you will not see the translucent effect of the subsurface color if the surface color is completely black.

Subsurface Color

This setting controls the color that light will take on as it passes through the material. Your own skin is a great example of the subsurface scattering effect. When a bright light shines through the thin parts of an ear or the thin skin between fingers, the light is colored by what lies beneath the surface and comes back more red.

While the light is passing through the surface, it is bounced around in many random directions. This creates the soft translucent effect rather than the direct refraction effect of glass and similar materials.

For plastic materials, you will often set this color to something very similar to the surface color, but perhaps a a bit brighter.



The material on the left has a black Subsurface Color - the one on the right has a bright red

Translucency

This controls how deep light penetrates into and through the surface depending on the units set under *Edit, Set Scene Units*. The higher your translucency value, the more of the subsurface color you will see coming through the surface. Higher translucency values will also create a softer looking material.

Specular

This controls the intensity of the reflections on the surface. This works together with the *Refractive Index* setting to further increase or decrease the strength of the reflections on the surface.

Roughness

Type:	Translucent (Advanced) ▾	
	Properties	Textures Labels
Surface		☐ <input type="color" value="#cccccc"/>
Subsurface		☐ <input type="color" value="#ff0000"/>
Translucency	☐	5
Specular	☐	
Roughness	☐	0,05
Refractive Index		1,2
Samples		32

Increasing *Roughness* will spread and distribute reflections over the surface and create a more matte surface.

Refractive Index

This controls how much light will bend or refract as it hits and passes through parts that have this type of material. The default of 1.4 is a good starting point, but you can increase the value to create a more dramatic refraction within the surface.

Samples

A low samples setting (8 or lower) will tend to make the surface look more noisy, which will give a more imperfect and rough look. As you increase the value, the noise will even out more and provide a more evenly distributed roughness.

Velvet

The *Velvet* material is very useful for creating soft fabrics that have the distinct light catching effects that result from the soft fibers in finely woven fabrics.

You will generally be able to do fabric materials well with the plastic or advanced material types - but the velvet material provides control over parameters not found in other material types.

Diffuse

This can be thought of as the overall color of the material. A dark color is generally preferred for both the diffuse and sheen settings as this material can become unnaturally bright when light colors are used.

Sheen

The sheen color is observed as light that appears to be reflected back across the surface from behind, almost as though the surface is backlit. This setting is combined with the edginess control to add a soft sheen across the entire material. The backscatter parameter also gets its color from the sheen setting. Generally, this should be set to a color very similar to the diffuse color, but a bit brighter.

Roughness

The roughness setting determines how evenly the backscatter effect is distributed across the surface. When this is set to a low value, the backscattered light will stay contained within smaller areas. A high value will spread the light across the entire object evenly.

Backscatter


This is light that is scattered across the entire object and is especially apparent in the shadowed areas of the object. It can be used to give an overall soft look to the surface. The color of the backscatter light is set with the sheen control.

Edginess

This controls how far the sheen effect spreads over the surface. A low value will cause the sheen to fade out gradually, while a high value will produce a bright border of sheen around the edges of the surface. A setting of zero disables the sheen effect.

Samples

The samples setting controls how imperfect or refined the backscatter effect appears. A higher value will smooth out this scattered light and will cause it to appear more even. A low value will show a coarser grain/noisiness in the backscattered light. A higher setting, around 32, is often preferred for this setting as it provides a smoother result.

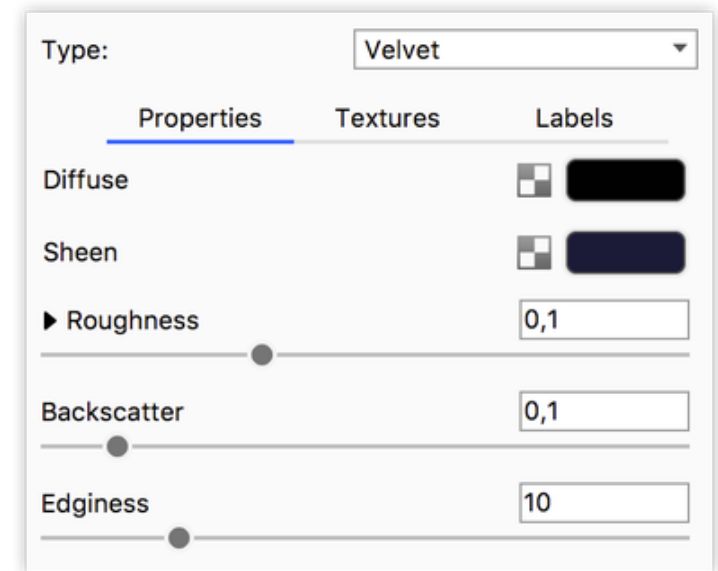

Light Sources

In KeyShot, physical lights are designed as materials that may be applied to parts. Any geometry can be turned into a light source. You can either import new geometry, use existing geometry or add a primitive (*Edit, Add Geometry...*). Light sources are labeled in the *Project* window, *Scene Tree* by a light bulb icon  next to the part name.

Light Source Material Types

- [Area Light](#)
- [Point Light](#)
- [IES Light](#)
- [Spotlight](#)

In this section

- [Area Light](#)
- [Point Light](#)
- [IES Light](#)
- [Spotlight](#)

Area Light

Area Light is a material type that will give you a wide range of light dispersion. This will function similarly to a flood light.

The screenshot shows the 'Area Light' properties panel. At the top, the 'Type' is set to 'Area Light'. Below this are two tabs: 'Properties' (selected) and 'Textures'. Under the 'Properties' tab, there is a 'Color' section with a checkerboard icon and a color selection box. Below that is a 'Power' section with a slider, a text input field containing '1', and a unit dropdown menu set to 'Watt'. A section titled 'Advanced' is expanded, showing five checked checkboxes: 'Apply to front of geometry', 'Apply to back of geometry', 'Visible to Camera', 'Visible in reflections', and 'Visible in Shadows'. At the bottom, there is a 'Samples' section with a slider and a text input field containing '9'.


Color

Here, you can choose the color the light will cast. You can also place a texture in front of the light source to color and mask the emitted light.

The example below shows a planar area light with a [Color Gradient](#) texture.

On this page

- Color
- Power
 - Lumen
 - Lux
- Apply to Geometry
 - Apply to Front of Geometry
 - Apply to Back of Geometry
- Visible to Camera
- Visible in Reflections
- Visible in Shadows
- Samples

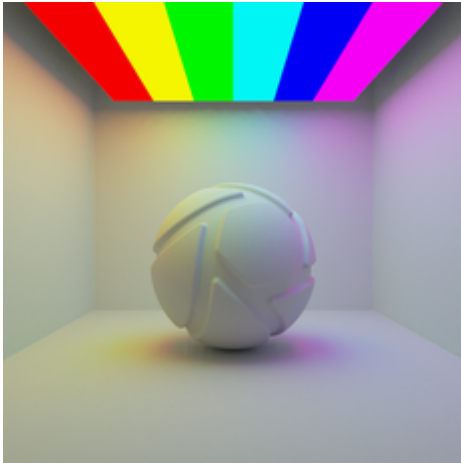

For accurate lighting colors, use the Kelvin scale to select accurate lighting temperatures.

<i>Color = 3000 Kelvin</i>	<i>Color = 4000 Kelvin</i>	<i>Color = 5000 Kelvin</i>	<i>Color = 6500 Kelvin</i>

Power


The power of the light can be controlled in either Watt, Lumen or Lux. Lumen or Lux are recommended for best results. The choice between Lumen or Lux depends on the preferred workflow.

Lumen

When the Power unit is set to Lumen, then the light output is specified as luminous flux. **Total light output** will be **constant** for

area light objects of different sizes.


The examples below show the effect of increasing the size of a square area light from 10 to 200 mm. Power is a constant 250 Lumen.

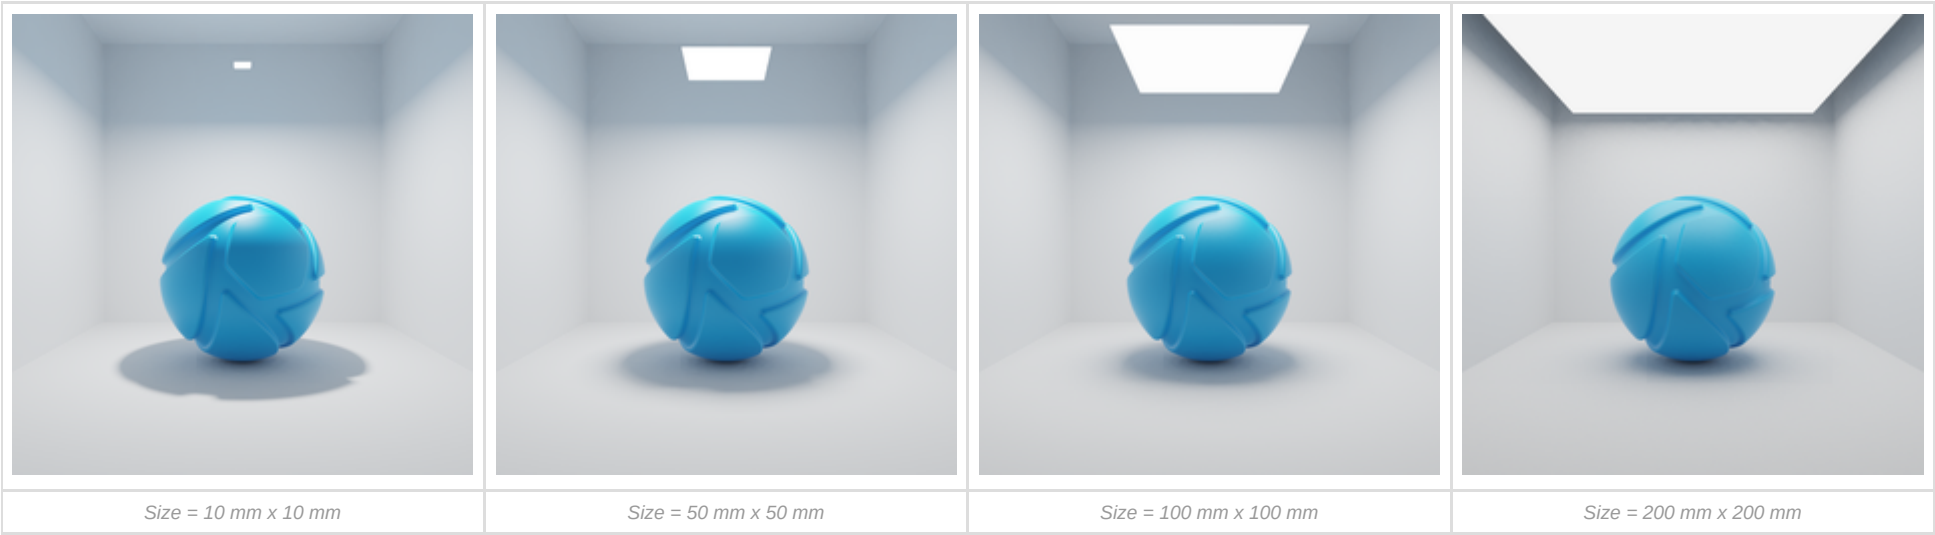

Lux

When the Power unit is set to Lux, then the light output is specified as luminous emittance. 1 Lux equals 1 Lumen per square meter of light-emitting surface. **Total light output** will **vary** for area light objects of different sizes. Small area lights are dim, while large area lights are brighter, since the light-emitting surface area is larger.

The examples below show the effect of increasing the size of a square area light from 10 to 200 mm. Power is a constant 25000 Lux.

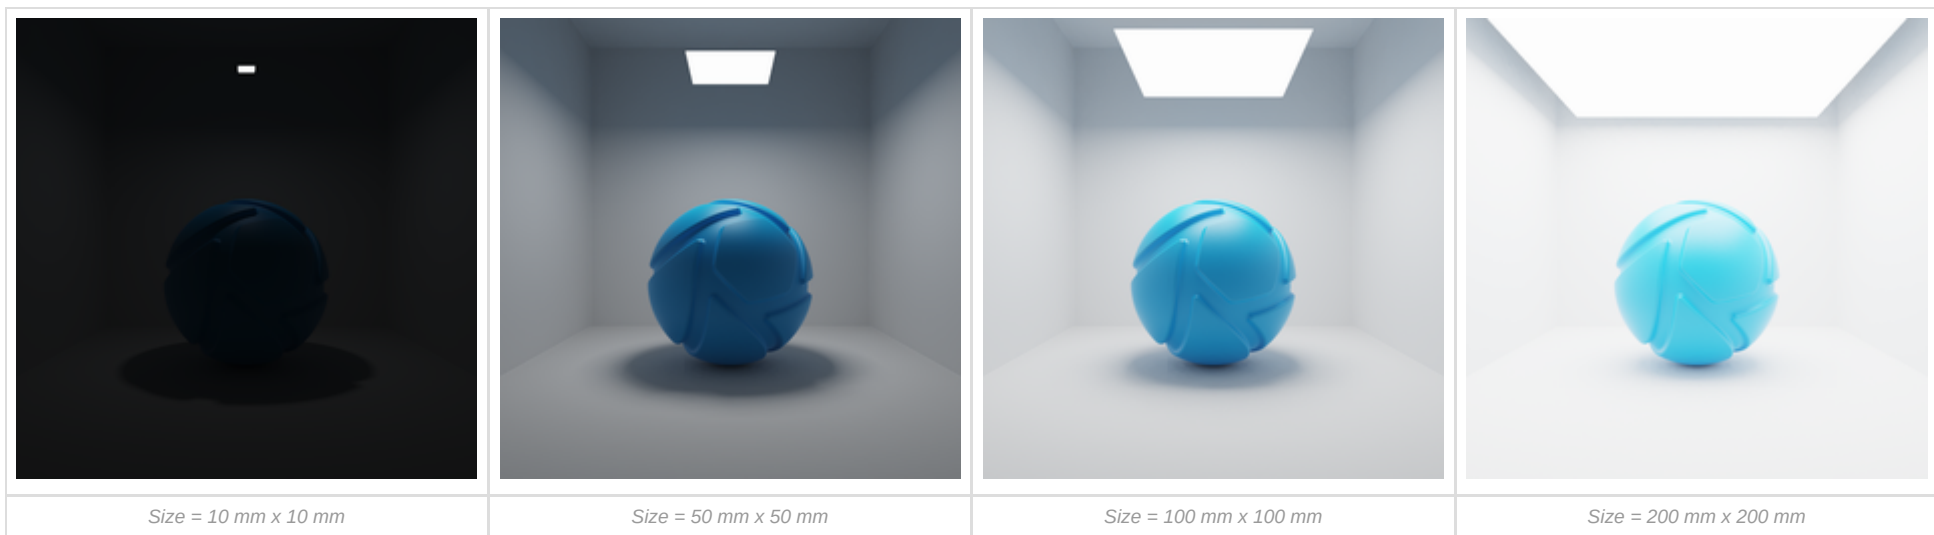

Tip!

The softness of shadows from an area light is closely related to its size. A large area light produces soft shadows, while a small area light results in harder shadows with crisply defined, sharp edges.

Apply to Geometry


There are two checkboxes to make an area light emit from the front, back or both sides of the geometry. Which side of the geometry is interpreted as front or back depends on the orientation of the surface normals.

Toggling these options is most useful for surface geometry without thickness.

Apply to Front of Geometry

Select this to make the light source emit from the front side of the surface geometry.

The example below shows a planar area light, emitting from the front side.

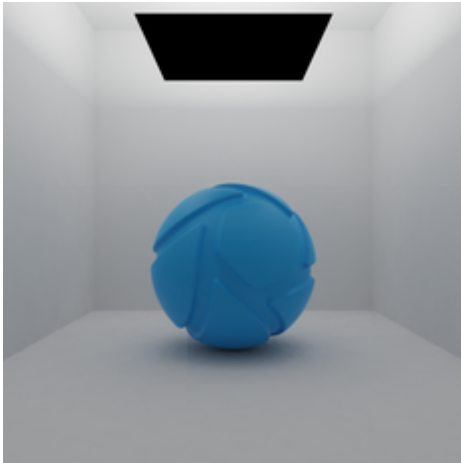

Apply to Back of Geometry

Make the light source emit from the back side of the surface geometry.

The example below shows a planar area light, emitting from the back side.




The example below shows a planar area light, emitting from both the front and back side.



Visible to Camera

Here, you can toggle whether or not the light source geometry is shown in real-time window and renderings.

The examples below show the effect of toggling visibility to camera.

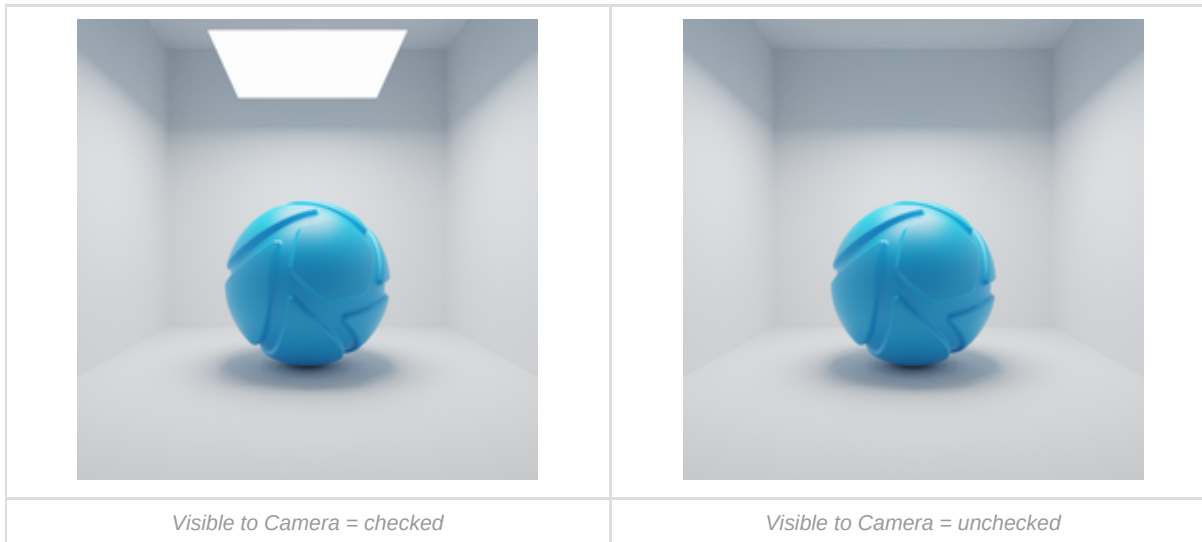

Visible in Reflections

Here, you can toggle whether or not the reflection of the light source is shown in real-time window and renderings.

The examples below show the effect of toggling visibility in reflections.

Reflections in Plastic material		Reflections in Metal material	
			
<i>Visible in Reflections = checked</i>	<i>Visible in Reflections = unchecked</i>	<i>Visible in Reflections = checked</i>	<i>Visible in Reflections = unchecked</i>

Visible in Shadows

Here, you can toggle whether or not the light source geometry casts a shadow in the real-time window. Disabling allows light to pass through the area light object. This option is disabled by default so as not to block any other light sources, including HDRI lighting.

The examples below show the effect of toggling visibility in shadows. The scene is lit by a large area light with a warm color (HSV: 30°, 90%, 100%) and a slightly smaller area light with a cool color (HSV: 225°, 35%, 100%) directly below it. Visible in Shadows is toggled for the smaller, cool area light.



With Visible in Shadows checked, the cool area light blocks the warm area light. As a result, the cool area light is the predominant light source in the scene, causing a clear blue cast.

With Visible in Shadows unchecked, light from the warm area light is able to pass through the cool area light. As a result, both area lights are contributing more or less equally to the scene's lighting. The cool and warm light now blend, causing a warmer cast.

Samples

Use this slider to control the amount of samples used in the render.

Limitation

ZSpheres transferred from ZBrush are not yet supported as Area Lights.

Point Light

Applying a *Point Light* to geometry replaces it with a point located in the parts center.

Type:

Point Light

Properties

Color

Power

1,808

Watt

Radius

2,165 mm

On this Page	
- Color - Power - Radius	

Color

Here, you can choose the color the light will cast. For accurate lighting colors, use the Kelvin scale to select accurate lighting temperatures.

			
Color = 3000 Kelvin	Color = 4000 Kelvin	Color = 5000 Kelvin	Color = 6500 Kelvin

Power

Power determines how strong the light source is. It can be set in Lumen or Watt, where Lumen is recommended for the most accurate result.

Radius

Adjust the radius to control the softness of shadows cast from this light. A large radius gives soft shadows, while a small radius results in harder shadows with crisply defined, sharp edges.

			
Radius = 0 mm (The unit depends on the Scene Units.)	Radius = 5 mm	Radius = 10 mm	Radius = 20 mm

Note

The effect of radius depends on the size of models. Larger models may require a higher radius value for a similar effect.

IES Light

When using *IES Light*, you will need to load an IES profile by clicking on the folder icon in the editor. As soon as you load the profile you will see the shape of the IES profile in the material preview. You will also see the shape in form of a mesh in the Real-time View.

File

This displays the name and location of the IES profile being used. Click the folder icon to change to a different IES profile.

Color

Here, you can choose the color the light will cast. Use the Kelvin scale to select accurate lighting temperatures.

Type: IES Light

Properties

File keyshot_spot_120.ies

Color

Multiplier 0,785

Radius 74,2 mm

Light Axis

☐ Positive X

☐ Positive Y

☐ Positive Z

☐ Negative X

☒ Negative Y

☐ Negative Z

On this page
- File - Color - Multiplier - Radius - Light Axis



Multiplier

Adjust the intensity of the light with this slider.

Note:


The luminous flux (luminous power of the light) is embedded in the IES file itself as a value in Lumen. The Multiplier adjusts this value. For the most accurate result, the Multiplier should be left at a value of 1. Values between 0 and 1 can be used to simulate the behavior of a dimmer.

Radius


Adjust the radius to control the softness of shadows cast from this light. A large radius gives soft shadows, while a small radius results in harder shadows with crisply defined, sharp edges.



*Radius = 0 mm
(The unit depends on the Scene Units.)*

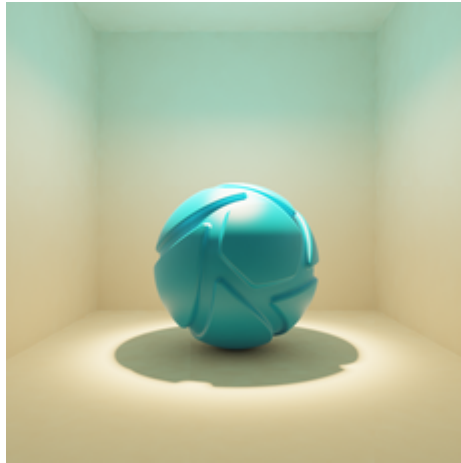

Radius = 5 mm

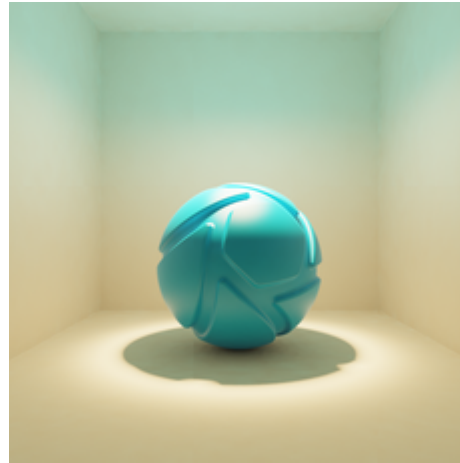

Radius = 10 mm



Radius = 20 mm

Note

The effect of radius depends on the size of models. Larger models may require a higher radius value for a similar effect.

Light Axis

Here you can control the axis of your IES Light source.

Tip

If you have imported a scene where the axis orientation is different from the one in your light sources, you don't have to rotate them - just choose the appropriate up-axis.

Spotlight

A *Spotlight* can be thought of as a Point Light where the output is clipped, so that the light is emitted in a cone. This will function similarly to spotlights used in stage lighting to create pools of light.

Color

Here you can set the color of the light.

You can also place a stencil texture in front of the light source to control the shape and color of the emitted light - as you see it in real-life gobos.

Color Stencil Diameter

If you use a texture on the spotlight, this slider specifies the width of a virtual stencil disc that always fits the Spotlight's beam exactly.

Tip

The stencil diameter is related to the width of the texture. if both are the same width the texture will fit the beam. if the texture is wider than the stencil it will be cropped, while textures that are smaller than the stencil will be repeated.

Color Stencil example

The following image is used as a Color texture.



On this page

- [Color](#)
- [Color Stencil Diameter](#)
 - [Color Stencil example](#)
- [Power](#)
- [Constant Light Output](#)
 - [Constant Light Output is unchecked](#)
- [Beam Angle](#)
- [Falloff](#)
- [Radius](#)

Type: Spotlight

Properties

Textures

Color  

Color Stencil Diameter 0,1


Power 6000 Lumen

☒ Constant Light Output

Beam Angle 45 °

Falloff 0,5

Radius 0

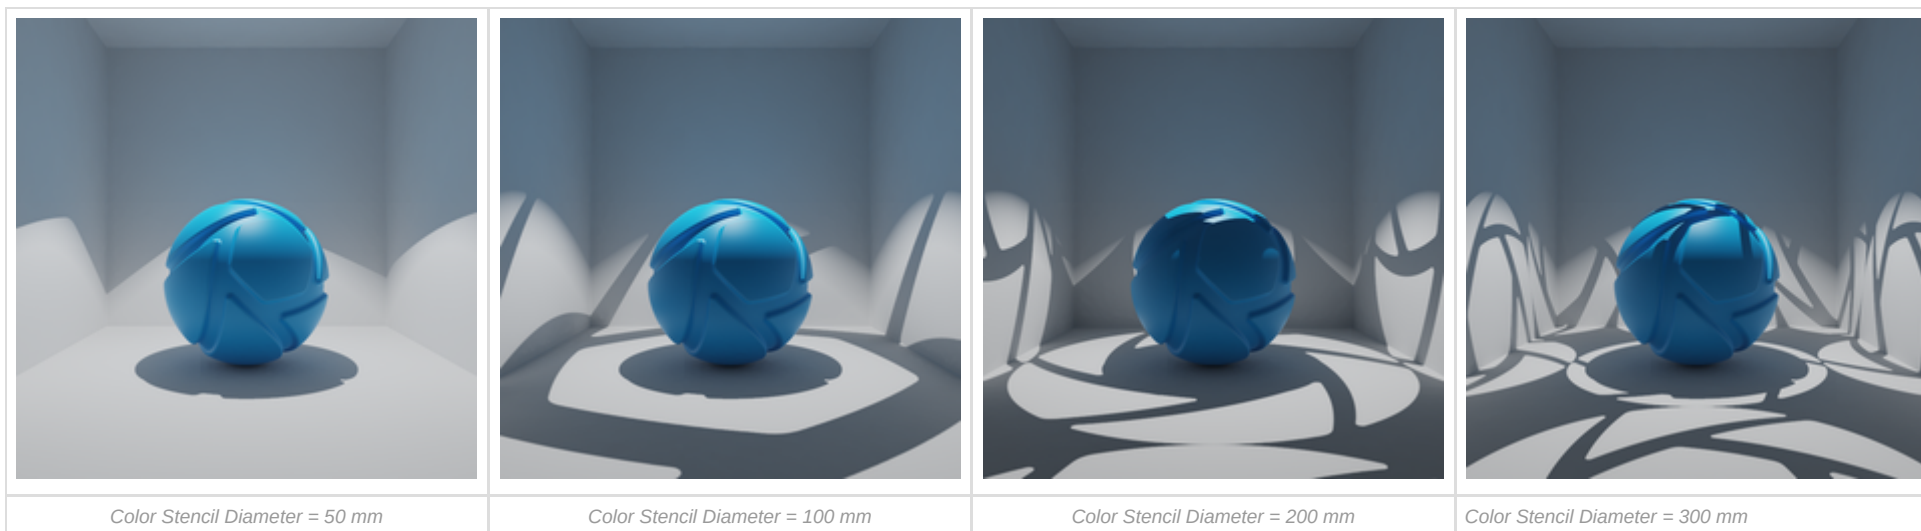

Power

Power determines how strong the light source is. It can be set in Lumen or Watt, where Lumen is recommended for the most accurate result.

Constant Light Output

This checkbox does not change the physical behavior or correctness of the Spotlight, but is there for convenience when adjusting Power or Beam Angle, depending on the preferred workflow. This setting allows to switch between *constant total light output (checked)* and *constant illuminance (unchecked)* when adjusting the Beam Angle.


Note

Illuminance is the luminous power incident on a surface.

Constant Light Output is checked

The entered Power value is the luminous flux of the clipped point light, i.e. the light emitted in the beam cone. The power of the Spotlight beam will be identical to the Power value. This also means that **total light output** with a large or small Beam Angle will be **constant**. Thus, illuminance will not be constant when changing the Beam Angle. Illuminance with a small Beam Angle will be higher than with a large Beam Angle, since the light is concentrated into a narrower beam.


The animation below shows the effect of checking Constant Light Output with an animated Beam Angle.

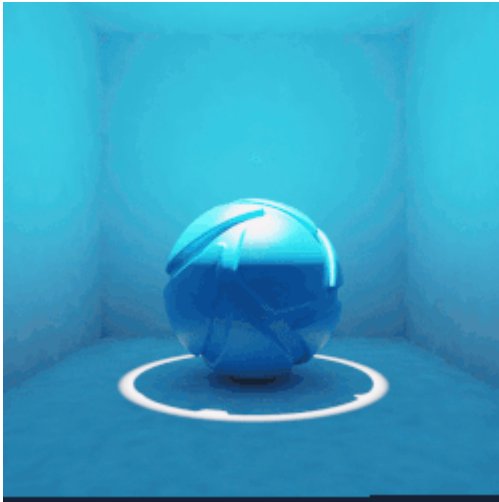

Constant Light Output is unchecked


The entered Power value is the luminous flux of the unclipped point light, i.e. the light ignoring the beam cone. The actual power of the Spotlight beam will be a fraction of the Power value, since the light output is clipped by the beam. Thus, total light output with a large Beam Angle will be higher than with a small Beam Angle. At the same time, **illuminance** will be **constant** when changing the Beam Angle.

The animation below shows the effect of unchecking Constant Light Output with an animated Beam Angle.

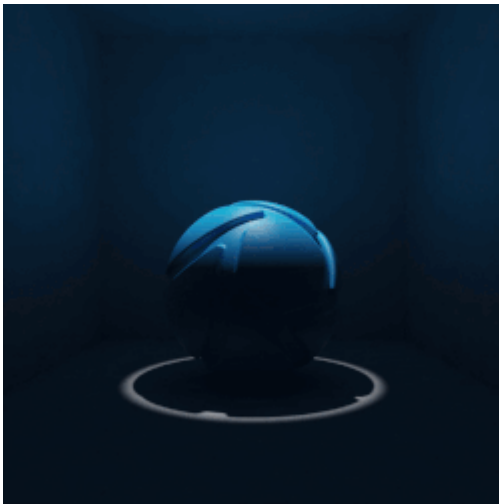

Beam Angle


Sets the angle that determines the size of the beam - the higher the angle the wider the beam.

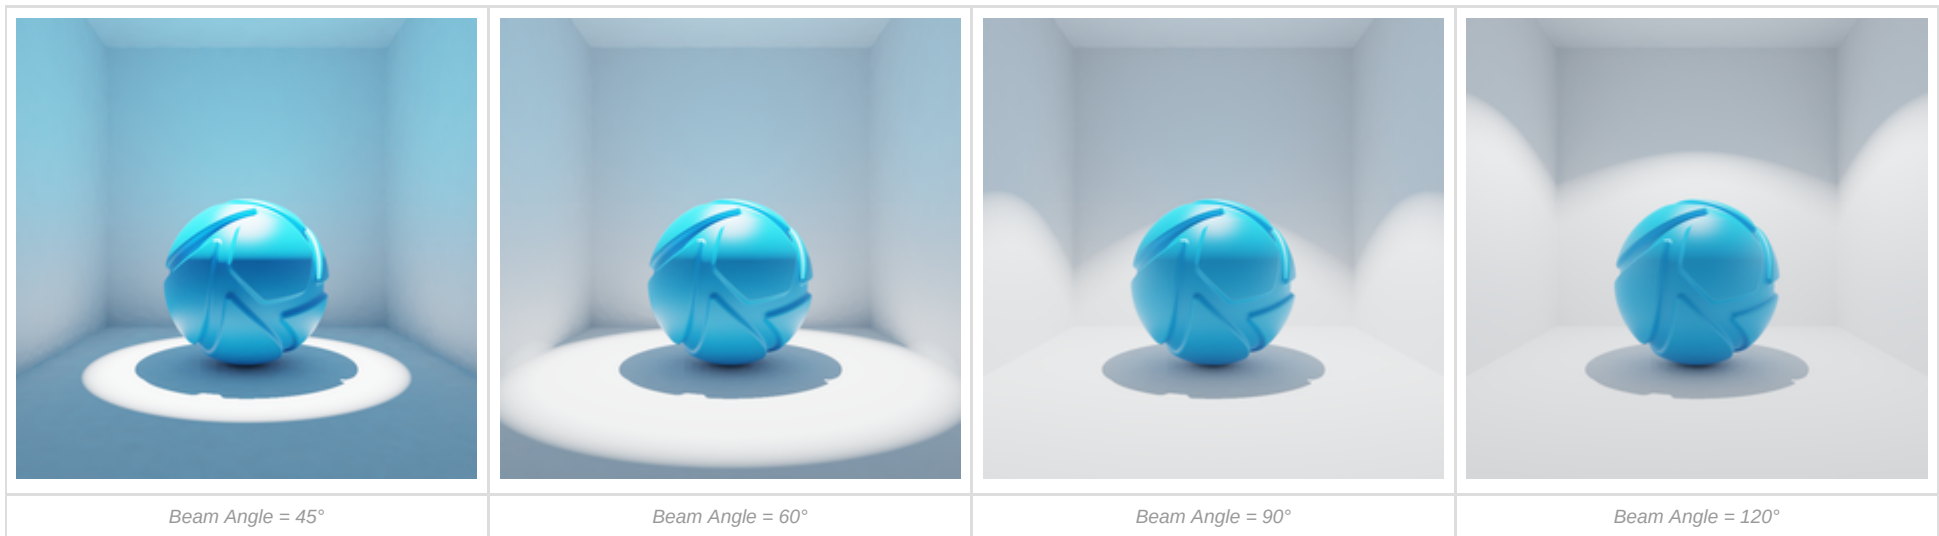


Falloff

Falloff determines the point from where the beam is dimmed toward the edges. The scale reflects the radius of the beam, where 0 is on the outer edge of the beam and 1 is in the center.


The higher the number, the softer the transition from light to dark will be.

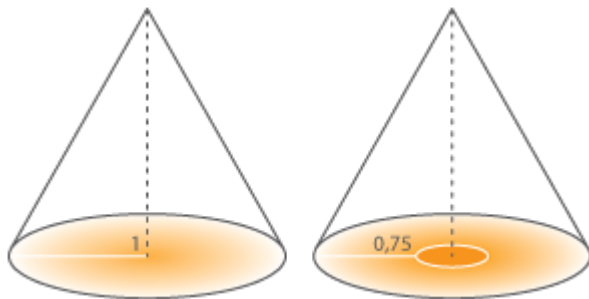

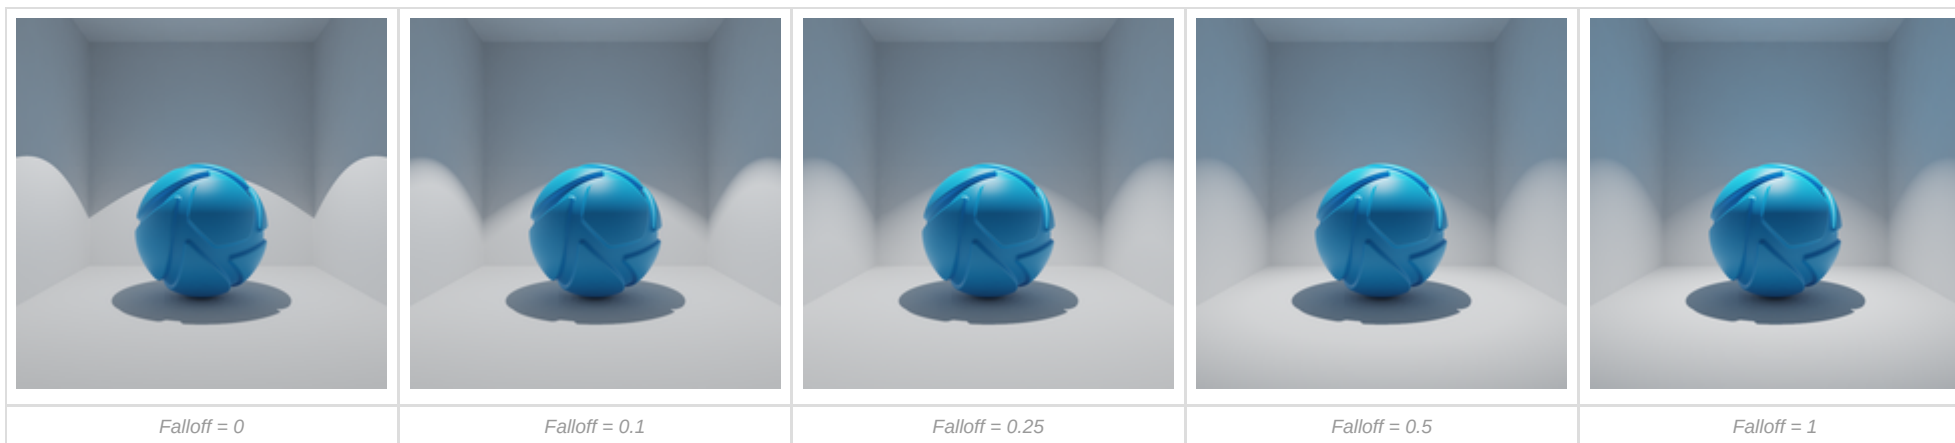

Radius

Adjust the radius to control the softness of shadows cast from this light. A large radius gives soft shadows, while a small radius results in harder shadows with crisply defined, sharp edges.


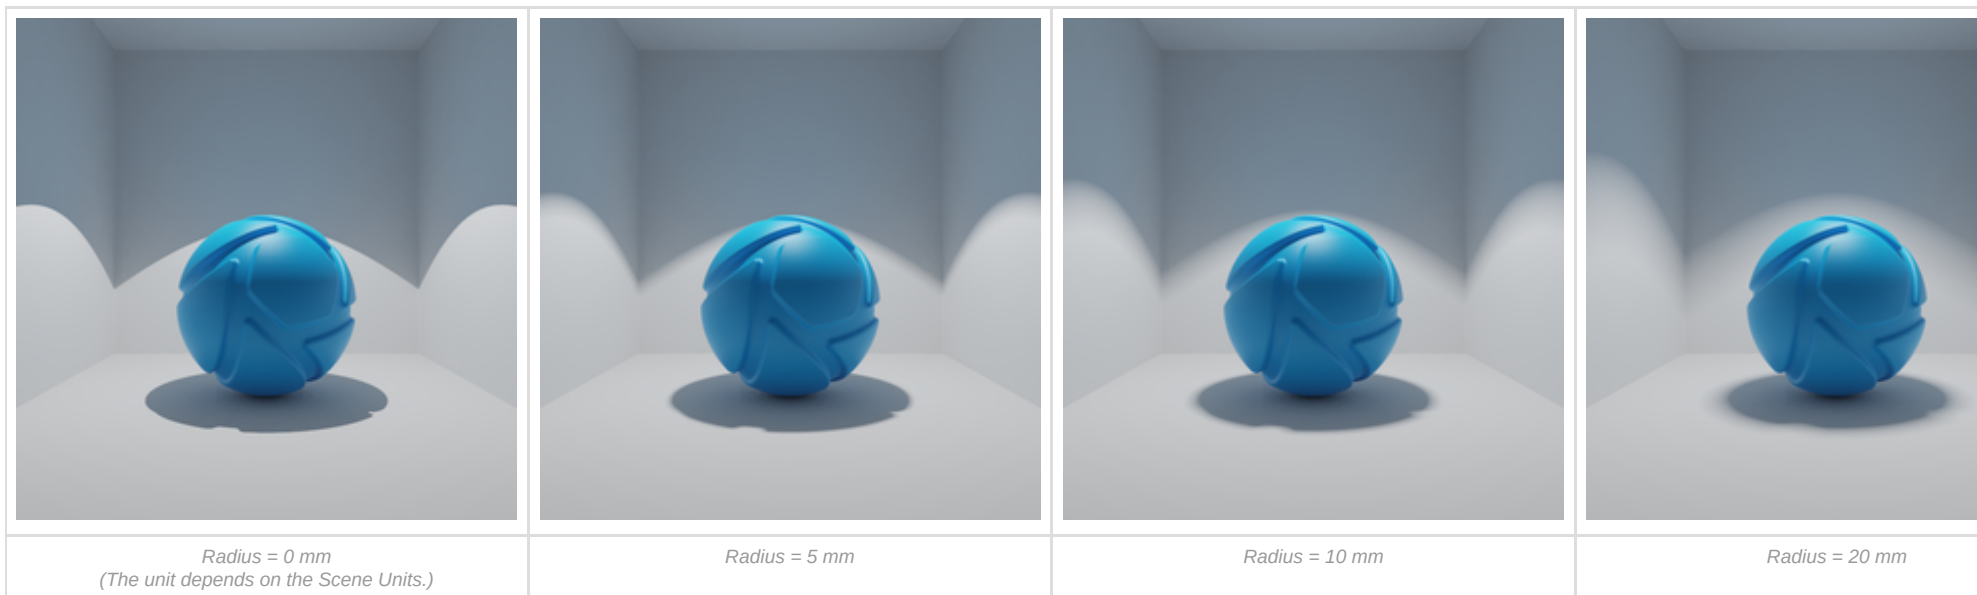


Note


The effect of radius depends on the size of models. Larger models may require a higher radius value for a similar

effect.


Increasing the radius will also blur any stencil texture projections.

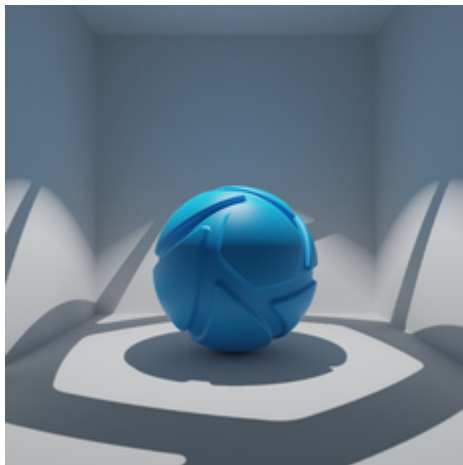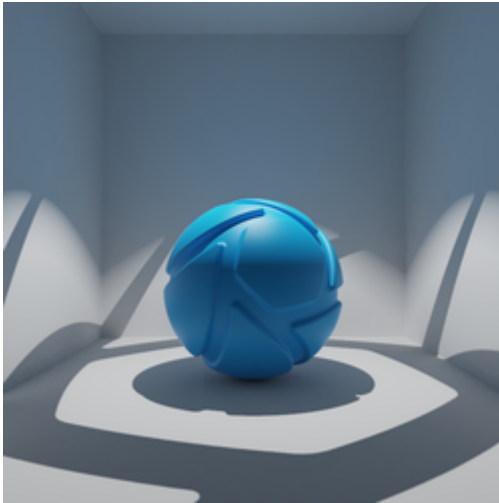


Radius = 0 mm

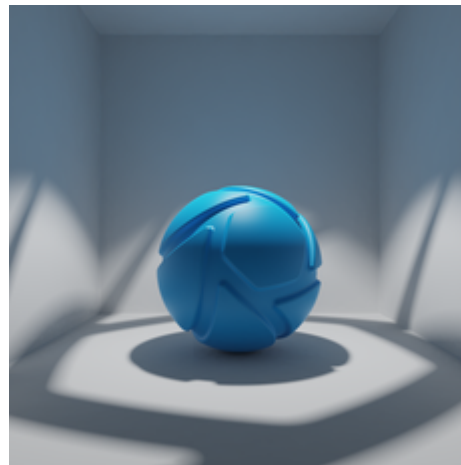

Radius = 5 mm

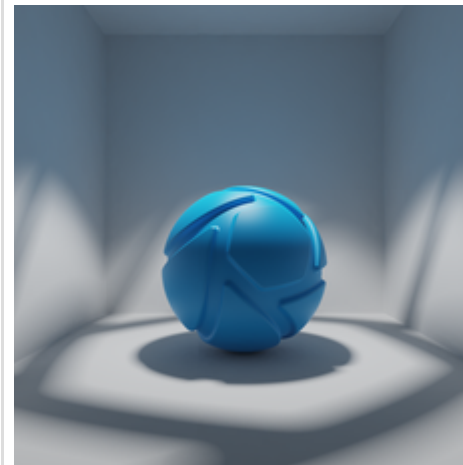

Radius = 10 mm

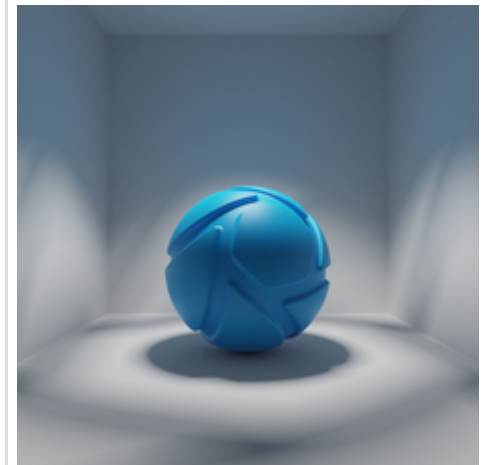

Radius = 20 mm

Cutaway

The Cutaway material enables you to non-destructively subtract geometry from your model.

Setting up the Cutaway Material

Simply add the geometry you want to use for the cut, place it so it cuts into your model and assign the cutaway material to it.

Tip

You can import simple geometry (sphere, cube etc.) into your scene from the *Main Menu, Edit, Add Geometry*.

Cap Types

- **No Caps** - The cuts will be left open.
- **Inherit Caps** - The cuts will be capped with the material of the part that is cut into
- **Color** - The cuts will be capped with a solid color. When this option is selected the cap color will be shown - click the color input to set another color.
- **Material** - Use another material for the caps. Drag a material from the Library to the material field in the cutaway material properties. Click the material field to edit the material.

Excluded Objects

If you only want to cut into some of the parts of your model you can exclude objects from the cutaway. Click the  add button and select the nodes you want to exclude. To remove a part from the exclusion select it in the list and click the  delete button.

Limitations

- Opacity maps on cutaway caps are not supported
- Fade Animations are not supported with cutaway materials
- Show Caps is intended to be used together with fully closed surfaces (solids). Caps may show artifacts with non-closed geometry.

Known Issues


- If you have two co-planar parts where one is excluded from the cutaway and you use inherit caps or material caps. Artefacts can occur on the surface of the excluded material.
- Cutaway material may interfere with shadows on the environment ground. If the cutaway object touches the environment ground it will cut that just as it cuts into regular parts.
Workaround: Add a groundplane (*Edit > Add Geometry > Add Ground Plane*) and exclude it from the cutaway.
- When the Camera is inside the cutaway object, Color caps do not show and when using Material caps, all objects in the scene will be displayed with the cap material.
- Cutaway with Inherit caps used on transparent materials may produce artefacts. Following material types are affected:
 - Glass (solid)
 - Translucent
 - Dielectric
 - Gem

On this page

- [Setting up the Cutaway Material](#)
 - [Cap Types](#)
 - [Excluded Objects](#)
- [Limitations](#)
- [Known Issues](#)



- Multi-Layer optics
 - Plastic (Cloudy)
 - Plastic (Transparent)
 - Excluded objects have incorrect reflections - Objects excluded by cutaway show reflections of the inside of the object being cut.
 - Bad Shadows on excluded objects.
 - *Basic Glass* and *Thin Film* appear as metal when applied to an excluded cutaway object - Product mode only!
 - Wrong shading on *Toon* material when used for cutaway with inherit caps or as material caps. The cut will appear to have color caps instead of the desired Toon appearance.
- Possible workaround:** Try to disable Material Contour in the Advanced settings of the Toon material.

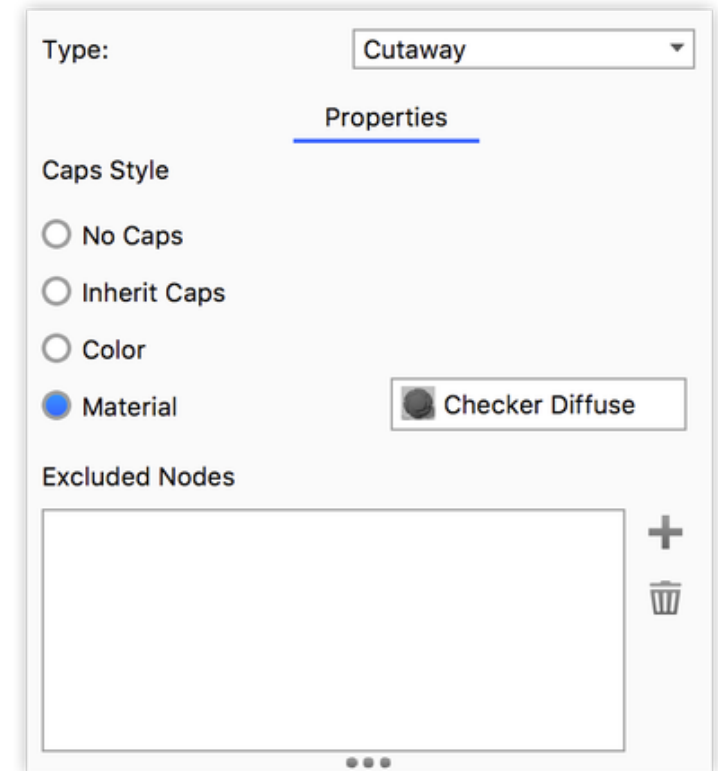

Emissive

The *Emissive* material type can be used for small light sources such as LEDs, lamps or even illuminated screen displays. It is not meant to illuminate scenes as a main light source. The emissive material will need “Global illumination” enabled in “lighting” to illuminate other geometry in the realtime view. It will also need ground illumination to illuminate the ground plane as shown. Color textures can be mapped to the material and any colors included in the texture will be emitted as light. When using emissives, it is a good idea to enable “Bloom” under effects in realtime settings. This will create the glowing effect shown in the image.

Intensity

This will control the intensity of the light that is emitted.

Color

This will control the color of the light emitted from the material.

Advanced

Visible to Camera

Hide the emissive material from the camera, but the emissive material will still emit light.

Visible in Reflections

Hide the emissive material from any specular reflections. The effect of the emissive will only be seen on the diffuse component of materials.

Two-Sided

This will cause the emissive light to display on both side of the surface.

Use Color Map Alpha

This will allow you to use the alpha channel in the color map.

Type: Emissive

Properties

Textures

Labels

Intensity  10

Color 

▼ Advanced

☒ Visible to Camera

☒ Visible in Reflections

☐ Visible in Shadows

☒ Two-sided

☐ Use color map alpha

Ground

The *Ground* material type is a specialised material type for creating a ground for rendered objects. It is a shadow and reflection catching material that blends with the Environment Background. The shadows and reflections will also have transparency when rendering to an image format that supports it.

Simply click *Edit* and select *Add Ground Plane*. This will add a ground plane into your KeyShot scene. The ground material can also be applied to imported geometry.

Shadow Color

The shadow that is being cast from the object will be displayed in this color. Clicking the color block will allow you to edit the color.

Specular Color

Controls the color of the specular light reflections on a material. When the specular color is set to black, a material will have no specular reflections and will not appear reflective or shiny. Specular color set to white will give 100% reflectivity for that material.

Refraction Index

This controls the shape of reflected objects on the surface.

Reflection Contrast

Controls the contrast for specular reflections. Can be used to enhance reflections on light backgrounds.

Clip geometry below ground

If any geometry is being displayed below the ground plane material, this option will clip the geometry below the ground plane, hiding it from the camera.

Type: Ground

Properties

Textures

Labels

Shadow  

Specular  

Roughness 

Refractive Index 

Reflection Contrast 

☐ Clip geometry below ground



Ground with shadows and reflections rendered with a Backplate Image

Toon

The *Toon* material type allows you to apply a solid color with contour lines to your 3D model. You are able to control the contour width, the number of contour lines, and whether or not shadows are cast onto surfaces. This is useful for creating sketches, product concepts, or technical illustrations. The Toon material type contains the following properties:

Color

This will control the fill color of the Toon material.

Contour Color

This will control the outline of the model.

Shadow Color

This controls the color of the shadows on the model. Activated when the *Environment Shadows* under *Advanced* settings setting is enabled. A texture may be applied to control the appearance of the shadow,

Contour Width

This will control how thin or how thick your contour lines will be.

Outline Width Multiplier

Increase this value to create a “perimeter line” effect with your Toon material. This will help pop the part from your scene and create a stronger visual contrast.

Part Width Multiplier

Use this to increase the line width of part contours and interior edge contours. It will not affect the scene unless *Part Contour* is enabled.

Contour Angle

This will control the number of interior contour lines in the toon sketch. A lower value will increase the number of interior contour lines and a higher value will decrease the number of interior contour lines.

Shadow Strength

When the *Environment Shadows* or *Light Source Shadows* setting is enabled, this controls the strength of each shadow type cast onto the Toon material.

Transparency

Increasing this value will allow light to pass through the geometry. Use this feature on transparent parts, or to show interior views of your model.

Advanced

Contour Quality

This will control the quality of the contour lines. Use a lower value to obtain a rough sketch look, or a higher value for a more clean and precise stroke.

Contour width is in pixels

When enabled, the contour lines are defined using pixels. When this setting is disabled, the contour lines are defined using scene units.

Interior Edge Contour

This will show or hide the interior contour lines in your sketch.

Material Contour

This will allow you to show or hide the contour line that separates each unlinked Toon material. If the Toon materials are linked,

this setting will not have an effect.

Environment Shadows

This will reveal the shadows cast by the model onto itself due to the selected lighting environment.

Light Source Shadows

Controls the visibility of shadows produced by a Light Source (Point Light Diffuse, Point Light IES Profile, or Area Light Diffuse).

The shadow appearance will change depending on the settings of your light source.

Type: Toon

Properties

Textures

Labels

Color



Contour Color



Shadow



▼ Contour Width



0,5 px

☒ Outline Width Multiplier

2

☐ Part Width Multiplier

1

Contour Angle

30 °

Shadow Strength

0,2

Transparency



0

▼ Advanced

Contour Quality



2

☒ Contour Width In Pixels

☒ Interior Edge Contour

☒ Material Contour

☒ Environment Shadows

☐ Light Source Shadows

Wireframe

The *Wireframe* material type exposes the lines and vertices of each polygon of a surface.

Width

Controls the width of the lines (wires) in the wireframe.

Width in pixels

When enabled, the wires are defined using pixels. When this setting is disabled, the wires are defined using scene units.

Wire Color

This controls the color of the lines of the wireframe

Base Color

This controls the overall color of material, excluding the wires.

Base Transmission Color

This value controls the base color transmission. A lighter color will give the appearance of transparency.

Backside Base Color

This controls the backside of the base color. On a cube this would be the inside of the cube.

Backside Wire Color

This controls the backside of the wire color.

Type: Wireframe

Properties | Textures | Labels


Width  0,5 px

☒ Width In Pixels

Wire  

Base  

Base Transmission  

Backside Base  

Backside Wire  

Axalta Paint

As the leading manufacturer of auto body paints, Axalta has created several collections of KeyShot materials that are an accurate representation of the real world paints they provide.

You can find a selection of the materials in the Material Library and find even more materials on the [Axalta Collections website](#)

As the paints are developed by Axalta you can not create new ones from scratch, but you can tweak the colors and make adjustments to roughness and reflection.

Color Tweaker

Advanced option for fine adjustments to the way the paint behaves when viewed at certain angles.

Roughness

This adds microscopic levels of imperfections to the surface of the material when the values are increased. When this is set to 0, a material will appear perfectly smooth and polished. When the value is increased, the material will appear more matte as light is diffused across the surface.


Advanced

Refraction Index

This slider provides controls the reflection on the surface. Increase the value to get more reflection intensity.

Samples

A low samples setting (8 or lower) will tend to make the surface look more noisy, which will give a more imperfect and rough look. As you increase the value, the noise will smooth out and provide a more evenly distributed roughness.

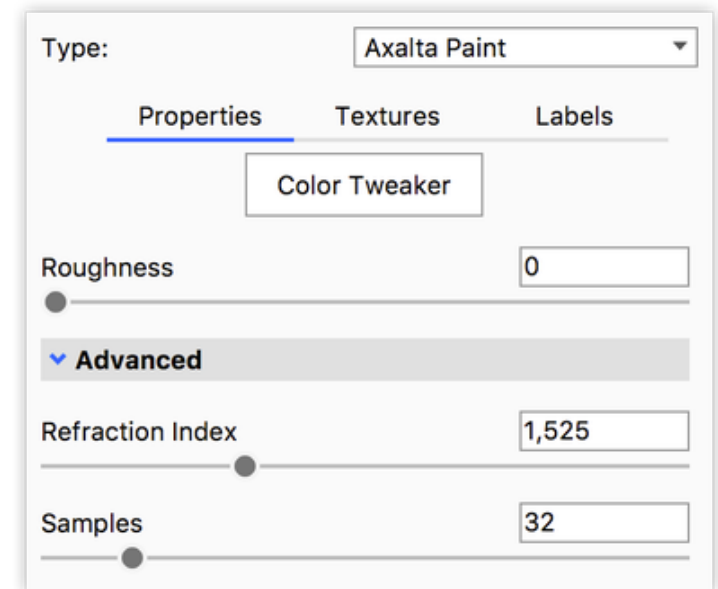

Xray


The *Xray* material type provides a useful tool for illustrative renderings. It is often used to create a faded view through an outer shell.

Color

When applied to a part, the Xray effect works by showing more of the material color on areas of the surface that are being viewed at more of an angle. The surface is nearly completely transparent where it is viewed at a direct angle.

Note: the Xray material does not cast shadows.

Type:	Xray
Properties Textures Labels	
Color	

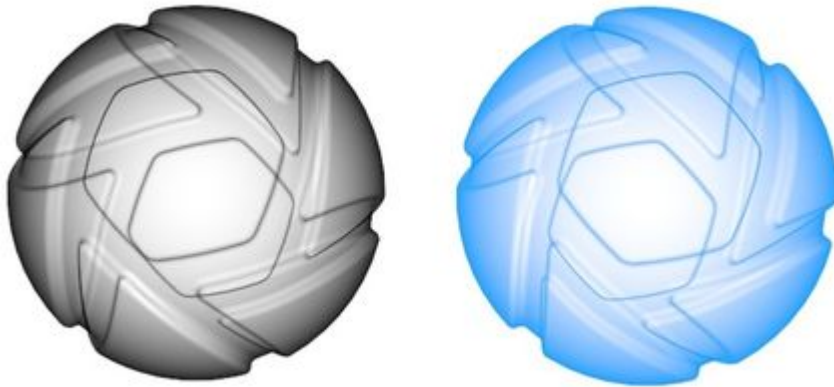

Xray material with different colors.

Color Library

Applying Colors

The KeyShot Color Library lets you drag and drop predefined colors onto any part or object in the Real-Time View. This will replace the primary color of the material. If you want to replace any of your materials other color parameters, you can press *Alt* while you drag the color onto the material - This will give you a choice between all color values of the material.

Search

Searching for colors can be done by clicking in the search box in the top right and typing the name of the color.



Find similar colors

Searching can also be achieved by clicking the  crosshair icon in the top right area of the dialog. This will open a window with a color picker, where you can either enter the color you are looking for or use the  eyedropper to select a color in the scene. This will filter the swatches in the current color group so only colors similar to the one you searched for are shown. Click  refresh to clear the search again.



Import

You can import Color libraries from .KCP or .CSV files. Note that the imported colors will be placed in the currently active Color Group - So you may want to create a folder for the purpose before importing.

When creating a CSV file, the color entries need to follow these formats

- **RGB** - Name; R; G; B;
- **RGB (0-1)** - Name; R; G; B;
- **HEX** - Name; *hex code (incl. #)*;
- **CMYK** - Name; c; m; y; k;
- **HSV** - Name; H; S; V;
- **CIE-L*ab** - Name: L; A; B;

The values can be separated by comma, semicolon, or tab.



Add color groups

You can create your own color groups for your custom colors. Select the folder where you want to add a color group to. Click the add folder icon and give the group a name

Add color

You can add your own colors in two ways:

- When you are defining a color with the color picker e.g. for a material, click to  save the color, choose *Color Group* and give the color a name.


- Right-click inside the color library and select *Add Color*. This will launch a color picker where you can define your color. Click *OK* to save the swatch an.

Export Color Group

You can also export color Groups - this will create a .kcp file.

Read-only color groups

Color groups that have a little  lock icon next to the name, contain industry standard colors such as PANTONE, RAL and FED-STD 595 and these can not be added to or exported.

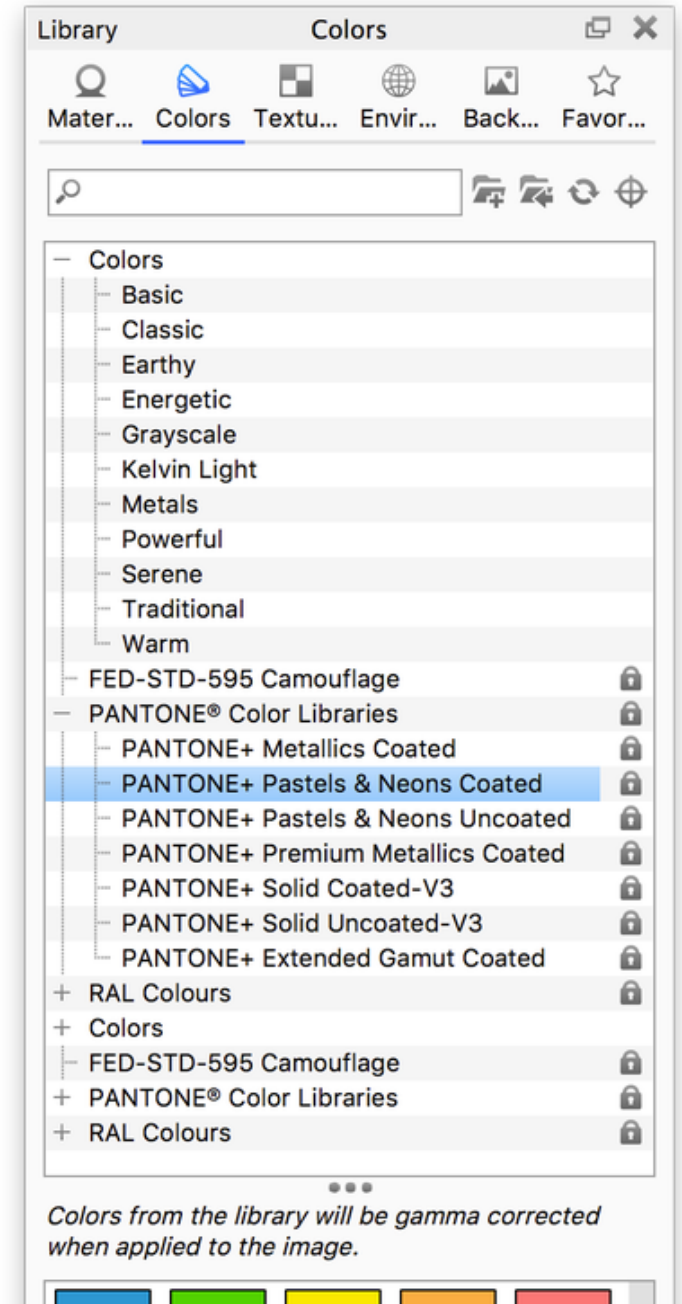



Color Picker

The Color Picker can be accessed anytime a color property is clicked. The Color Picker gives you the ability to both change colors quickly or test colors visually. Colors may be changed using the Color Bar, Color Map, Color Sliders (and their numerical inputs), or by dragging and dropping from the Color Swatches.

Color Bar

The Color Bar area contains the current color and a comparison of the *New/Old* color if the current color is changed. It also has the Eye Dropper tool and the option to save a color to the Library,

Color Map

KeyShot contains both a  Hue Color Field (default) and a  Traditional Triadic Color Wheel. These can be toggled at the lower left of the Color Map. The current color will be located on the Color Map by a white/black circle.


Color Sliders

The Color Picker also provides Color Sliders for various Color Spaces and Value scales. The Color Space can be changed from the Color Space dropdown menu at the lower right corner of the Color Map. The following options are available:

- **RGB** - Color channels for Red, Green and Blue
- **CMYK** - Color channels for Cyan, Magenta, Yellow, and Black
- **HSV** - Color channel for Hue, Saturation, and Value
- **Grayscale** - Value channel for Brightness
- **CIE-L*a*b** - Value channels for Lightness (L), red-green (a), and blue-yellow (b)
- **Kelvin** - Value channels for Temperature

When a Color Map is selected, the Color Sliders will update to provide input for the corresponding Color Space. Though you won't see the Color Map change when a new Color Space is selected, as you adjust the sliders and inputs the Color Bar and the Color Map will change to display to color selected or values entered. Likewise, the Model will display the new color in the Real-time View.

You can switch between Color Spaces without changing your color, however switching to Grayscale or Kelvin Value scales will limit the color range to those scales.

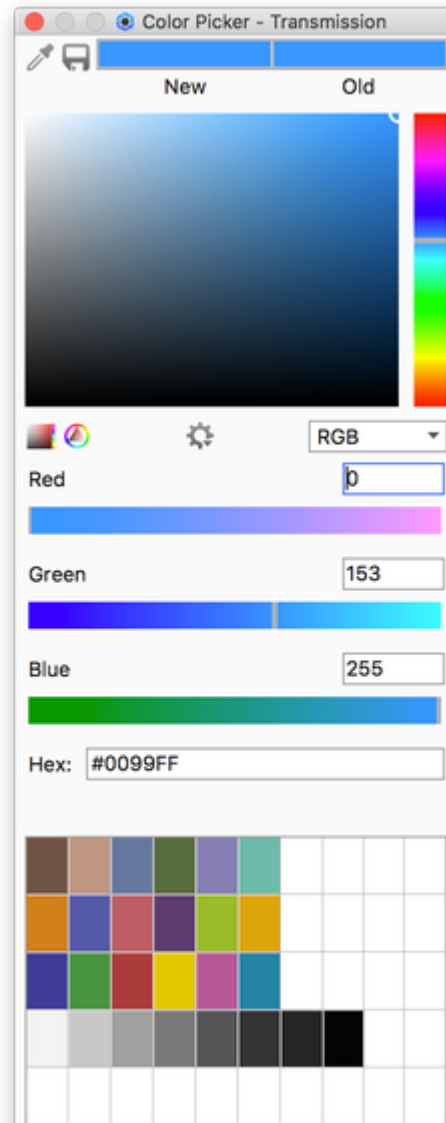

On this page

- [Color Bar](#)
- [Color Map](#)
- [Color Sliders](#)
- [Color Options](#)
- [Color Swatches](#)
- [Using the Color Picker](#)
- [Using the Eye Dropper Tool](#)
- [Saving a Color](#)

Color Options

Directly below the Color Map, you will see a gear icon  with additional color options.

- **Use gamma corrected values for input**
Checking this option will apply Gamma correction to the Color Sliders. (Selected on by default.)
- **Apply Image Gamma to colors in Swatches and Color Pickers**
Checking this option will apply gamma correction to both the color swatches of materials and the Color Picker. This will only adjust the actual color preview, not the values. (Selected on by default.)

Color Swatches

The Color Swatch grid at the bottom of the Color Picker provides quick access to colors you regularly use across scenes. Here, you can quickly add color swatches, refine them and, if desired, save the individual colors to a color folder later. The Color Swatches are loaded with preset colors.

Add new swatch

The color(s) represented in the Color Bar at the top of the Color Picker (both *New* and *Old*) can be dragged and dropped to the Color Swatch grid to create your own color palette. Color swatches can be overwritten by simply dragging and dropping new colors onto existing colors or by dragging and dropping within the Color Swatch area itself.

Using the Color Picker

When you open the Color Picker you will see the Color Bar, the Color Map, the Color Sliders and the Color Swatches. The current color will be shown in the Color Bar, located in the Color Map by a white/black circle, and on the Color Sliders with vertical lines and a value corresponding to the Color Space selected from the Color Space dropdown menu.

With the cursor on another area of the Color Map, click to select a new color, or click-hold and drag to change colors dynamically. For finer control over the color, select a Color Space that corresponds to the color control you desire, then use the color/value channels and input fields to adjust to the color desired.

Using the Eye Dropper Tool

The Eye Dropper tool  gives you the ability to select any color on your display. When you select the Eye Dropper tool, the color under your mouse cursor will appear in the *New* Color Bar area. Use the left mouse button to select the color or hit *Esc* to exit the Eye Dropper selection mode.

Saving a Color

When you have selected your desired color, you may drag and drop the color from the new area of the Color Bar to the Color Swatch grid for later use. To save a New color to your library, click the Save icon . A prompt will appear to choose a Color folder in the KeyShot Library where you would like to save your new color.

Add folder

To add a new folder to the Color Library, go to the *Library, Color* tab and select the *New Folder* icon  or right-click, at the location in the folder list where you want to add the new folder, and select *Add*. Likewise, to rename or remove a folder, right-click the folder and select *Rename* or *Remove*.


Material Graph


The Material Graph facilitates advanced material editing/creation. The feature is available only for users of KeyShot Pro.

You can access the Material Graph from the *Material Tab* in the *Project window*. Click the  Material Graph button to launch the Material Graph. It opens in a separate window and displays materials, textures, labels and more as nodes in a graph view to visualize connections and relationships within complex materials.

In this section

- [Material Graph User Interface](#)
- [Material Graph Nodes](#)

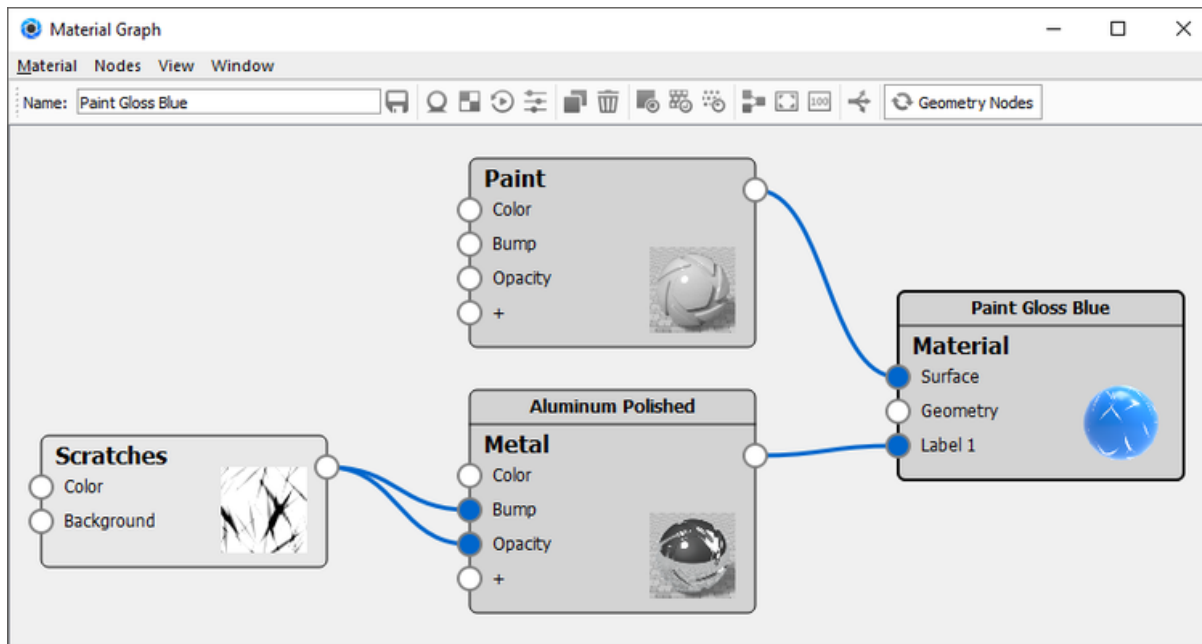

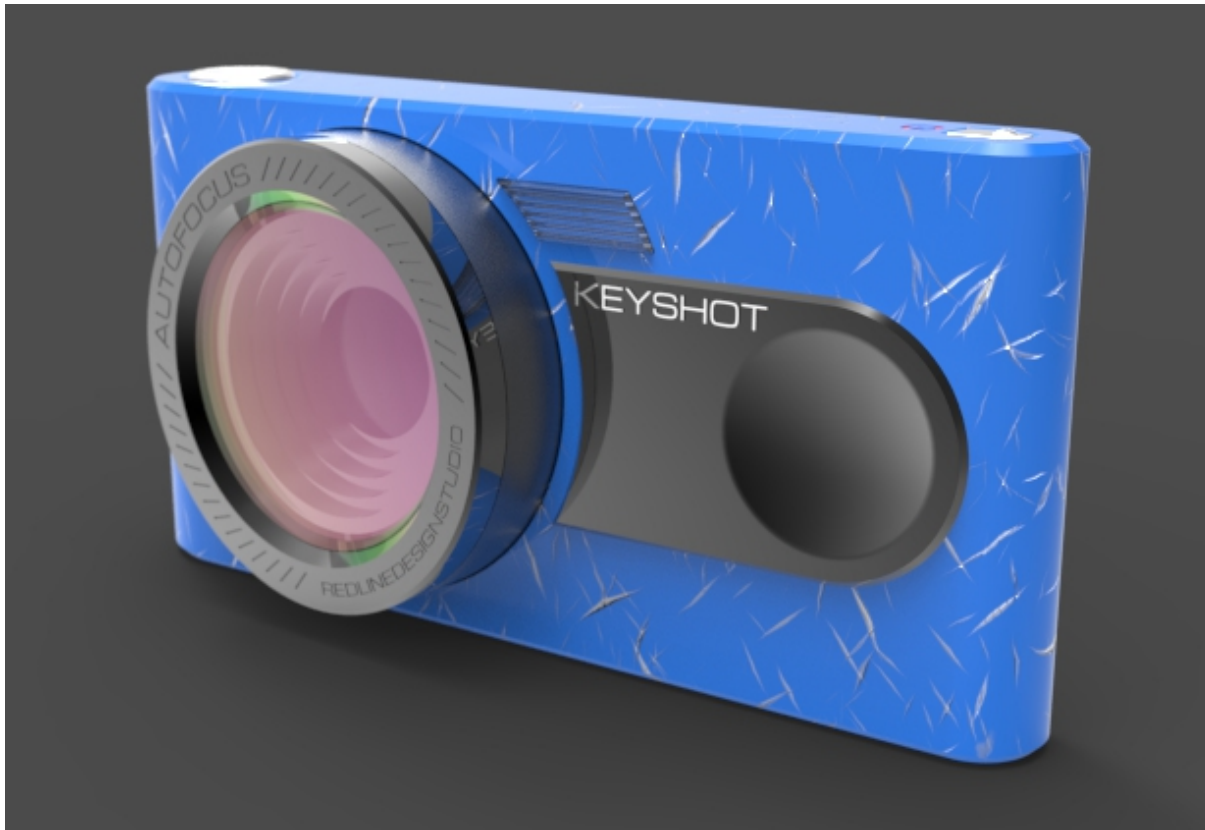

Material Graph User Interface

There are five components of the Material Graph window: Menu bar, Ribbon, Materials & Textures Library, Material Properties, and the Work Area.

1. Material Graph Menu Bar

Material

- **New** This will replace the working material and any textures with a basic diffuse material to start from scratch.
- **Save to Library** will save the working material to the specified folder in your KeyShot Library.
- **Export** This will allow you to export your material as a KeyShot MTL file type in a specified folder.

Nodes

This provides quick addition of nodes to the Work Area.

View

- **Align nodes** This automatically arranges connected nodes in the Work Area.
- **Zoom** With complex materials the Work Area can quickly get crowded - the zoom options allow you to quickly adapt the Work Area to your current material.
- **Preview** Options for previewing individual node settings such as color, alpha, and bump in the Real-Time. You can also stop the preview within this menu as well.

Window

This gives access to hide/show the Material Properties window (4), Materials & Textures Library (5), and the Material Graph Ribbon (2).

2. Material Graph Ribbon



Save to Library - saves the current material to your Material Library



Add material node - adds an "Advanced Material" node*



Add Texture node - adds a traditional texture map and opens the file browser window to select your image file*



Add Animation node - adds a Color Fade node*




Add Utility node - adds a Bump Add node*

*Adds the default node of the category - you can easily switch the node to another type of the same category in the Material Properties window.

On this page

- 1. Material Graph Menu Bar
 - Material
 - Nodes
 - View
 - Window
- 2. Material Graph Ribbon
- 3. Material Graph Work Area
- 4. Material Graph Properties
- 5. Material Graph Libraries

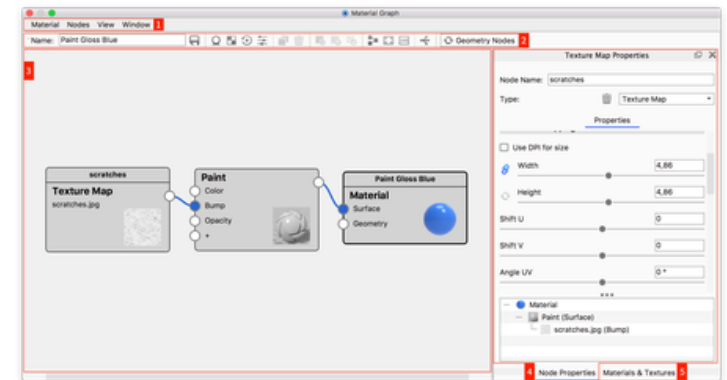

 **Duplicate selected node**

 **Delete Selected node**

 **Preview color**

 **Preview alpha**

 **Preview bump**

To activate a preview mode, select a node you would like to preview. After selecting a node, the available preview modes will become selectable. click on a preview mode to activate it, which will make the selected node red in the Work Area. To disable the preview mode, click on the activated preview mode again on the ribbon.

 **Align nodes** - align the nodes within the Work Area

 **Zoom to fit** - fit all the nodes within the Work Area

 **Zoom to 100%** - view the nodes at 100% zoom level

 **Create Multi-Material** - will convert the current material to/from Multi-Material

 **Refresh Geometry nodes** - The geometry shaders (displacement, bubbles and flakes) need to be refreshed before any edits will be visible in the Real-Time View.

3. Material Graph Work Area

The Work Area displays all nodes their connections in a graph view.

In the work are you have following options:

- **Select a node or connection** - left click.
- **Select multiple nodes** - left-click and hold *Ctrl* (*Cmd* on Mac).
- **Select multiple nodes** - Shift + left-button hold and drag to use the marequee selection.
- **Delete/duplicate node** - Right click on a (selection of) node(s) to delete or duplicate.
- **Remove/disable connection** - right click on the comnection and remove/disable/activate.
- **Add node** - Right click in the Work Area to access the context menu, where you can access the same nodes as those found in the Nodes menu.
- **Zoom in or out of the Work Area** - Use the middle mouse wheel.
- **Move the Work Area** - Click and drag the work area to move it around.

4. Material Graph Properties

The Material Properties dialog shows the associated properties for the current node being edited - similar to the Material tab in the Project window but with the option to change node type.


5. Material Graph Libraries

The Materials and Textures Library contains an organized thumbnail display of all the nodes available.

Material Graph Nodes

Nodes are displayed as gray boxes in the Work Area. Each node has different input and output channels depending on the type.

All materials have one Root node (marked with a thicker border) to which all nodes must be connected (either directly or through other nodes) to have effect on the material.

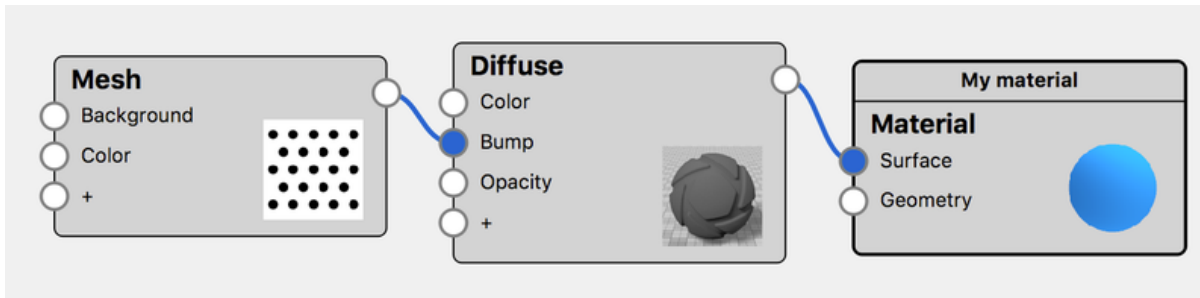

Channel connections are made by clicking on an output channel and dragging and releasing directly onto an input channel or onto the node itself. When it is released onto the node, a context menu will show all the available channel options. Once a connection is made, a blue line will appear connecting the 2 nodes. Right click the line to remove or disable the connection.

A disabled connection will be displayed as a grey dashed line. If you select a connection, it will turn light blue.

Node categories:

- [Material Node Types](#)
- [Texture Node Types](#)
- [Animation Node Types](#)
- [Utility Node Types](#)
- [Geometry Node types](#)

Material Node Types

Setting up Material nodes is initially the same as setting up Materials in the Material tab of the project panel - But with the Material Graph you can set up much more advanced materials using a combination of nodes - one thing you can do is add multiple bump textures to your material using Utility nodes ...and much more.

All [Material Types](#) are covered in our Materials section:

- Diffuse
- Flat
- Glass
- Glass (Solid)
- Liquid
- Metal
- Paint
- Plastic
- Thin Film
- Translucent
- Advanced
- Anisotropic
- Dielectric
- Gem
- Measured
- Metallic Paint
- Multi-Layer Optics
- Plastic (Cloudy)
- Plastic (Transparent)
- Scattering Medium
- Translucent (Advanced)
- Velvet
- Light Sources
- Cutaway
- Emissive
- Ground
- Toon
- Wireframe
- Axalta Paint
- Xray

Texture Node Types

Texture nodes are initially the same as adding textures in the Material Tab of the Project panel - But with the Material Graph you can set up much more advanced materials using a combination of nodes - one thing you can do is add multiple bump textures to your material using Utility nodes ...and much more.

See our Texture Types covered in our [Textures](#) section.

- [Texture Map](#)
- [Tiled UV](#)
- [Tri-Planar](#)
- [Video Map](#)
- [Brushed](#)
- [Mesh](#)
- [Weave](#)
- [Brushed \(Radial\)](#)
- [Camouflage](#)
- [Cellular](#)
- [Color Gradient](#)
- [Curvature](#)
- [Granite](#)
- [Leather](#)
- [Marble](#)
- [Noise \(Fractal\)](#)
- [Noise \(Texture\)](#)
- [Occlusion](#)
- [Scratches](#)
- [Spots](#)
- [Vertex Color](#)
- [Volume Map](#)
- [Wood](#)
- [Wood \(Advanced\)](#)

Animation Node Types

The Animation nodes are unique in that they allow you to create changing parameters of your materials.

When you add an Animation node to your material, it will automatically be added to the animation timeline as well.

You can select the node and change the settings in the animation properties window.

For more details about Animations, see the [Working with Animations](#) page.

Color Fade Animation

The Color Fade animation node allows you to create changing parameters of any of your custom material color swatches.

Color Bar

Here you can set when and what colors will fade from one to the the next. Click on the dropper circle to select it, then use the color swatch to choose a color.

The little triangles shows where the 2 colors are mixed 50-50 and they can be dragged to control the course of the blend.



Add Color Stop

If you would like to fade between more than 2 colors, click on the Add stop button below the color bar to create another color swatch. click and drag the color pins and the gradient apex slider to your desired animation effect.



Delete Stop

If you want to remove a color stop, just select it and click delete.

Time

To control the color change more precisely than by dragging the individual color stops on the timeline (color bar), you can select a color enter in where in the timeline it will become the selected color.

Blend

Check *Blend* if you want the colors blend into each other otherwise the color change will be instant, at the point of the color stop.


Time Settings

Use these settings to control the timing and duration of the animation - see the Motion Ease types [here](#).

Number Fade Animation

On this page

- Color Fade Animation
 - Color Bar
 - Time Settings
- Number Fade Animation
 - Time Settings

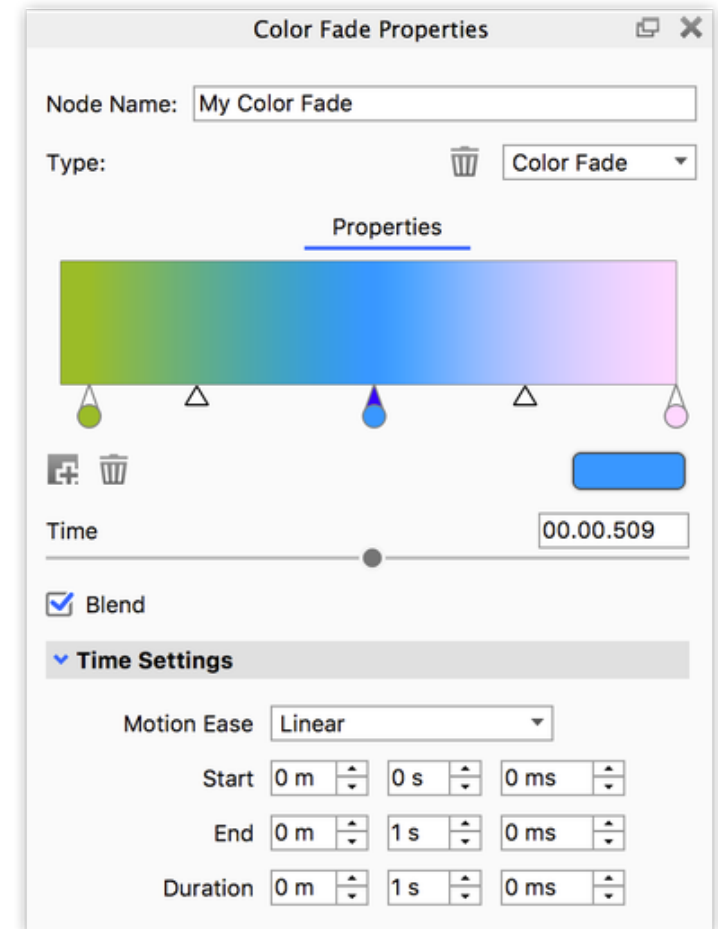

The Number Fade animation node allows you to create changing parameters of any of your numerical properties within your custom material.


To see the which parameters you can change for a specific node, connect the Number Fade animation node to the + socket.

From

Enter the numerical value you would like the animation to start at. use the sliders, or type in a specific value.

To

Enter the numerical value you would like the animation to end at. use the sliders, or type in a specific value.



Where the parameter originally is set you will now see the Animation node icon and the original value input will be disabled.

Time Settings

Use these settings to control the timing and duration of the animation - see the Motion Ease types [here](#).

Number Fade Properties

Node Name:

Type:

Properties

From

To

Time Settings

Motion Ease

Start

End


Duration

Utility Node Types

Utility nodes allow you to combine and add to the other node types.

Bump Add

Combine two bump texture maps or procedural textures. Control their interaction by defining the Ratio and Weight in which the two bumps are visible.

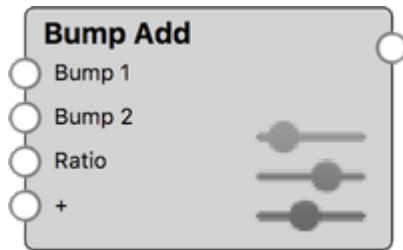

Ratio and Weights


The Ratio and Weights control the contribution of the two input bump maps to the final bump result.

The Ratio parameter allows to balance the contribution of both input bump maps with a single slider. The default value of 0.5 defines that both bump maps contribute equally to the final bump result. With a value of 0 only *Bump 1* affects the material, whereas with a value of 1 only *Bump 2* is visible.

The two Weight parameters work like a multiplier for the bump textures' respective Bump Heights. The default values of 1 define that the "strength" of the final bump result reflects those Bump Height values. When the Weight for a bump input is 0, the effect of that bump is nullified. Values higher than 1 amplify the bump effect in the final result.

Bump Add example

The following examples show a Plastic material with Bump Add to illustrate the concepts of Ratio and Weight.

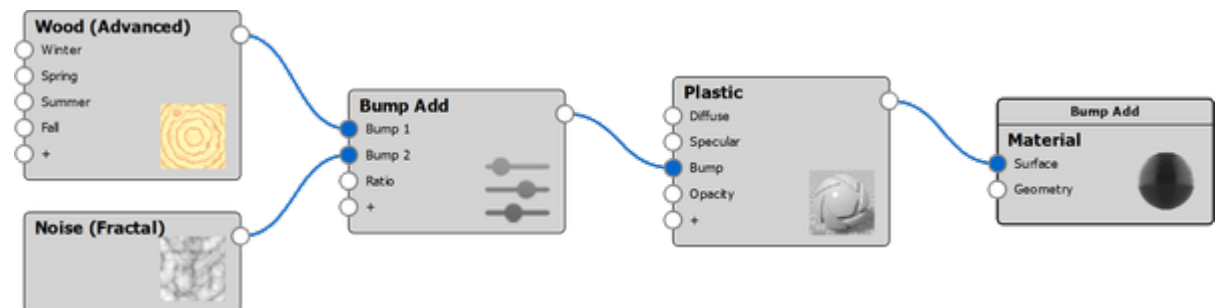

The Material Graph structure of this example

On this page

- Bump Add
 - Ratio and Weights
 - Bump Add example
- Color Adjust
 - Color Adjust example
- Color Composite
 - Color Composite example with Label Opacity
- Color Invert
 - Color Invert example with Label Opacity
- Color Key Mask
 - Tolerance and Fuzziness
 - Color Key Mask examples
- Color To Number
 - Color To Number example with Roughness
- Color Curve Randomize
- Mapping 2D
 - Mapping 2D example



Plastic material with two bump textures
Bump Add with Ratio = 0.5, Weight 1 = 3 and Weight 2 = 1

Variations



Bump Add with Ratio = 0



Bump Add with Ratio = 1



Bump Add with Weight 1 = 1 (Ratio = 0.5 and Weight 2 = 1)





Bump Add with Weight 1 = 10 (Ratio = 0.5 and Weight 2 = 1)

Color Adjust

Colorize and/or modify the existing color of a texture map or procedural texture by adjusting Hue, Saturation, Value, and Contrast. Each of these parameters can be textured.

At default values the texture remains unchanged.

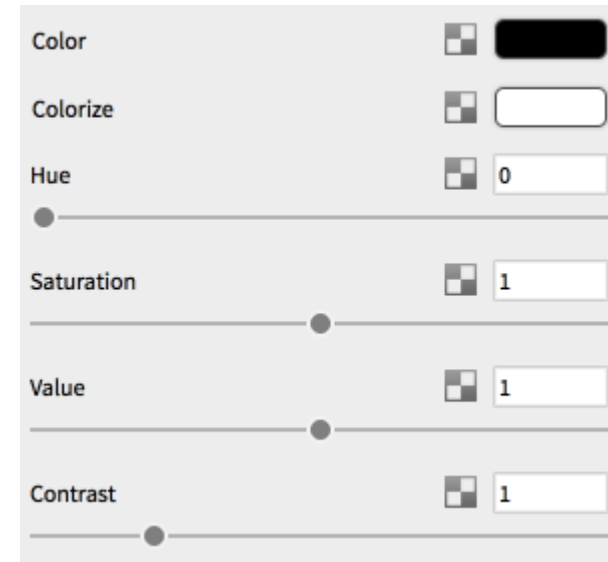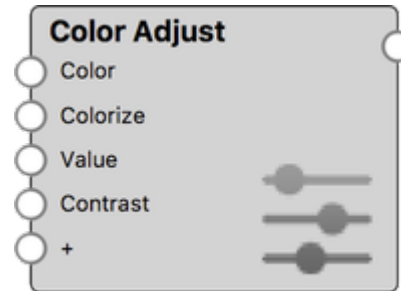

Color Adjust example


The examples below shows how a Color Adjust node can be used to easily adjust the color of wood textures.

Base Material:



Wood material with procedural wood texture

Material Graph

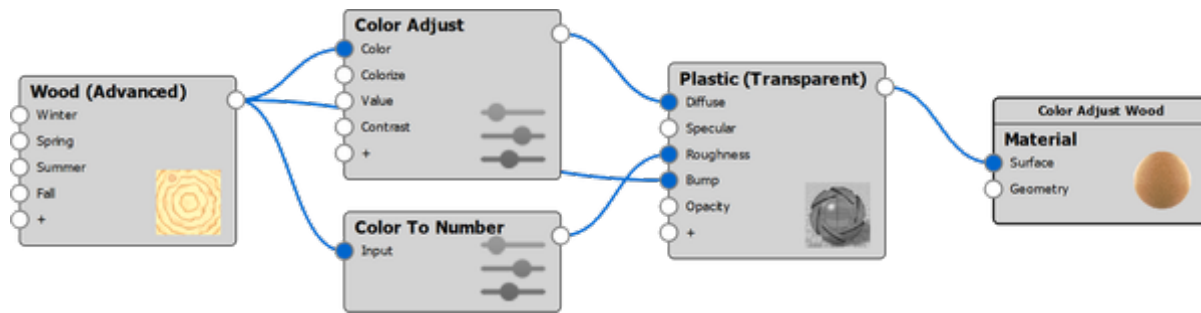

Color adjusted examples





Color Adjust with Value = 0.2



Color Adjust with Value = 2



Color Adjust with Value = Noise texture



Color Adjust with Contrast = 0.2





Color Adjust with Contrast = 3



Color Adjust with Contrast = Noise texture

Layer and combine two texture maps or procedural textures with control of Blend Mode and Alpha (transparency). The functionality is similar to working with image layers and blending modes in image editing software.

Color Composite nodes are commonly used create Opacity masks from multiple textures or to add gradients to textures.

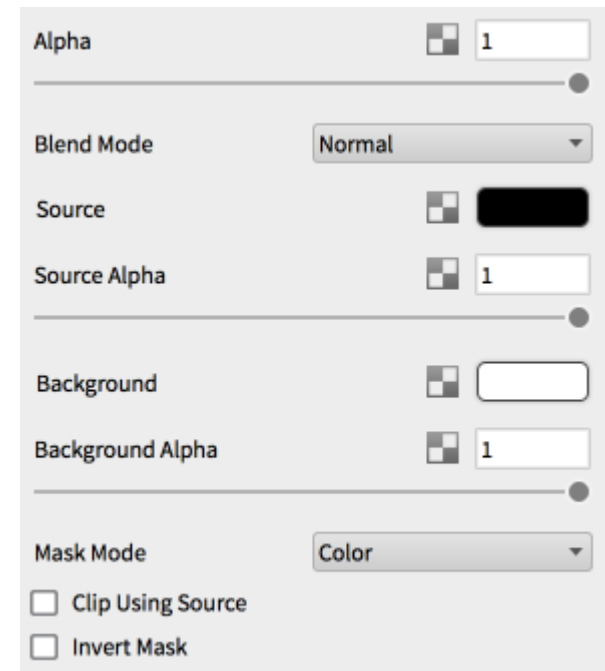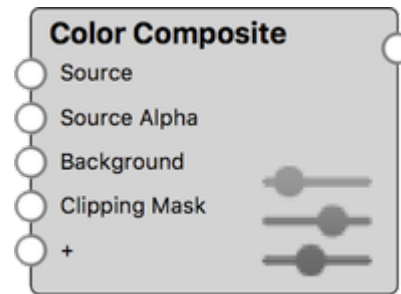


Color Composite example with Label Opacity

The examples below show how a Color Composite node can be used to create interesting Opacity masks for Label materials.




Flat material showing a Mesh texture

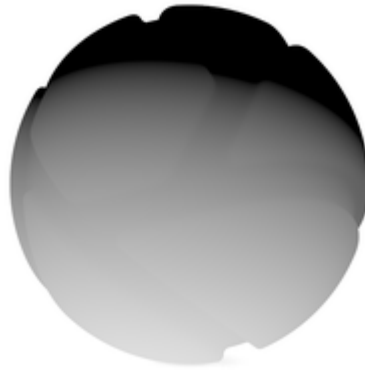

Flat material showing a Color Gradient texture





Flat material showing the blended result using Color Composite with Blend Mode Multiply

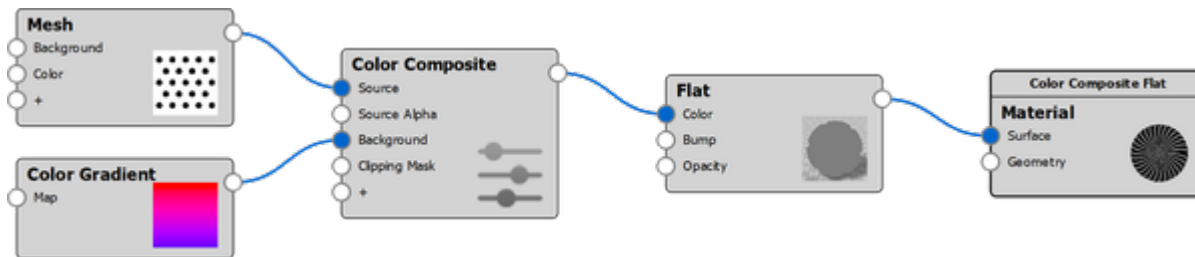

The Material Graph structure of above composite

Applying the Label mask

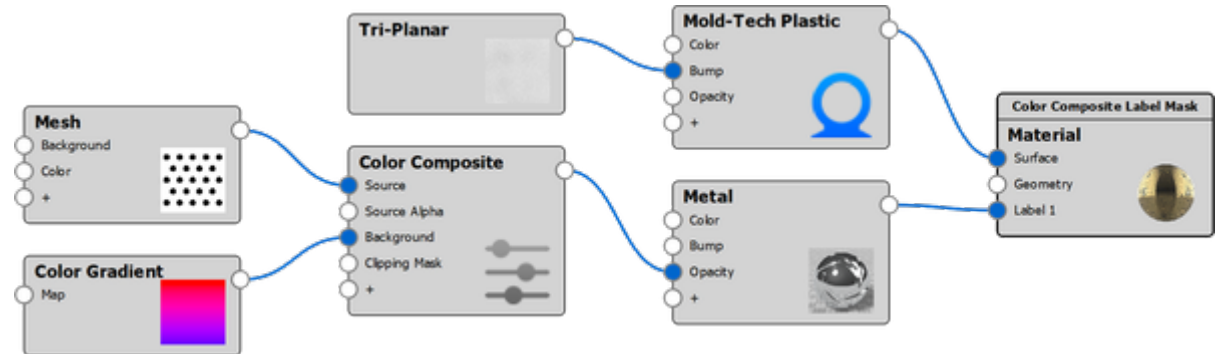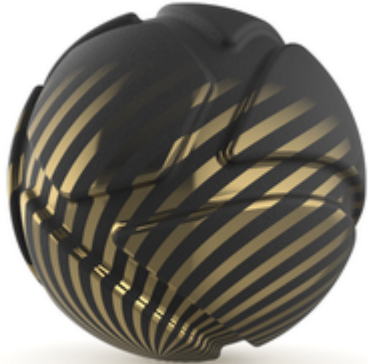

The Material Graph structure of this example


Mold-Tech plastic material with Metal Label using above composite texture as Opacity

Color Invert

Invert the color of a source texture map or procedural texture. This is commonly done to convert glossiness maps (white = perfectly shiny) to roughness maps (white = maximum roughness), or invert opacity masks.



Color Invert example with Label Opacity

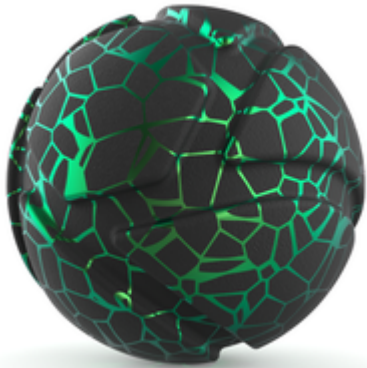


Mold-Tech plastic material with Metal Label.



Flat material showing the Opacity texture.



Mold-Tech plastic material with inverted Opacity for the Metal Label.

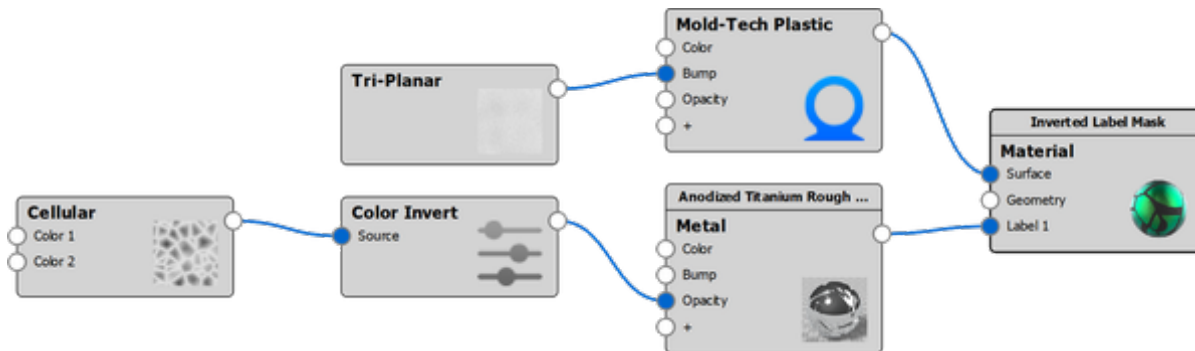


The Material Graph structure of this example.

Color Key Mask

Mask a specified color within a texture map or procedural texture. Control the strength of the mask by adjusting Tolerance and Fuzziness.

The Invert option allows to easily invert the mask. This effectively turns the Color Key in the *unmasked* color.

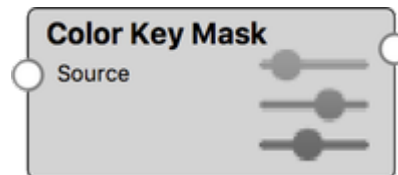

Tolerance and Fuzziness

The Tolerance and Fuzziness parameters allow to define the extent of the color mask.

Any color in the source texture, at a "distance" below Tolerance from the Color Key color, will completely be included in the mask. Fuzziness gradually (with falloff) includes more colors beyond that, but does not fade the mask inside the tolerance.

Color Key

Threshold


0,25

Fuzziness

1

☐ Invert

The examples below show a cubic lattice of spheres to illustrate the concepts of Tolerance and Fuzziness.





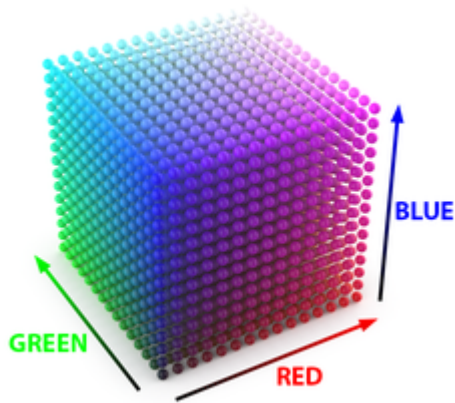


Cubic sphere lattice
Pure red (RGB: 255, 0, 0), green (RGB: 0, 255, 0) and blue (RGB: 0, 0, 255) axes with additive blending

Metal Label mask

A Color Key Mask is used to drive the opacity of a Metal label. The Color Key is RGB: 128, 0, 255

Tolerance	Fuzziness	Invert
-----------	-----------	--------

				
<i>Tolerance = 0.085 Fuzziness = 0</i>	<i>Tolerance = 0.5 Fuzziness = 0</i>	<i>Tolerance = 0.5 Fuzziness = 0.1</i>	<i>Tolerance = 0.5 Fuzziness = 0.5</i>	<i>Tolerance = 0.5 Fuzziness = 0 The Invert option is enabled.</i>



Color Key Mask examples

This example shows a model with a Mold-Tech plastic material onto which a solid-colored KeyShot logo Label is applied. Color Key Mask nodes can be used to mask out the individual colors.



The images below shows the result of using a Color Key Mask node to mask out the texture's pink color. For illustration, the output from the Color Key Mask node is connected to the Color parameter of a Flat material.

Depending on a texture's colors, the Threshold and Fuzziness values may have to be adjusted in order to achieve a precise and sharp (black and white) mask.

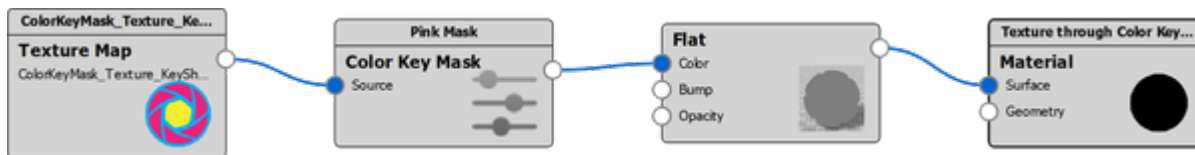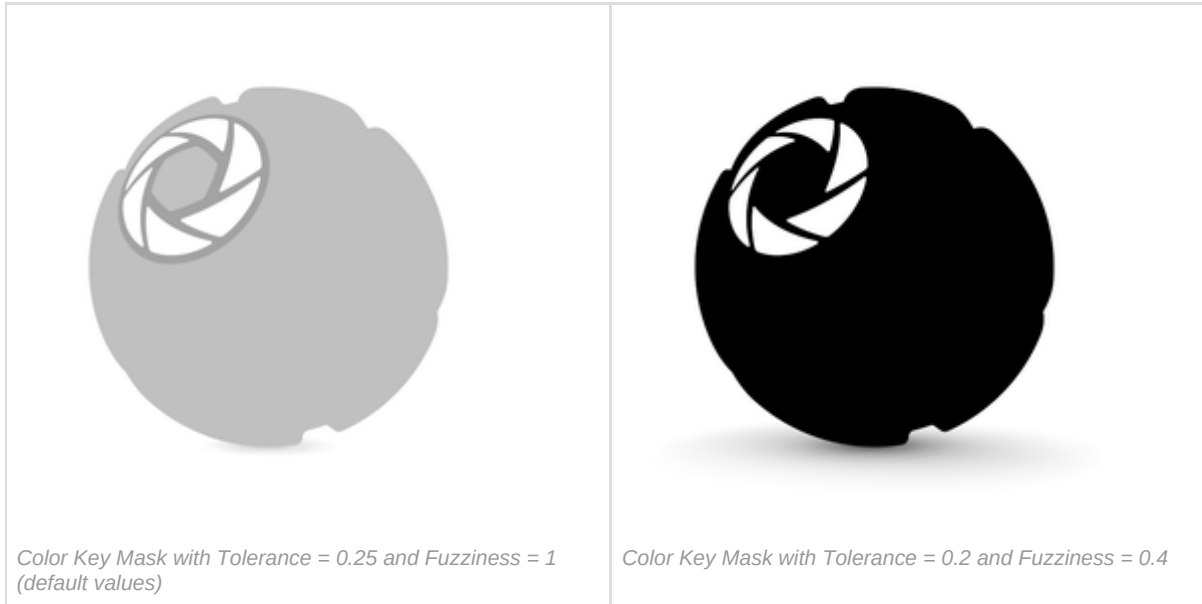


The basic Material Graph structure for using Color Key Mask to drive a material's parameter:
Texture > Color Key Mask > Material.

The two examples below show different applications of Color Key Mask.


Example 1: Label masks

Three Color Key Mask nodes are used to mask out the texture's three solid colors. The masks are connected to the opacity of three Label materials.

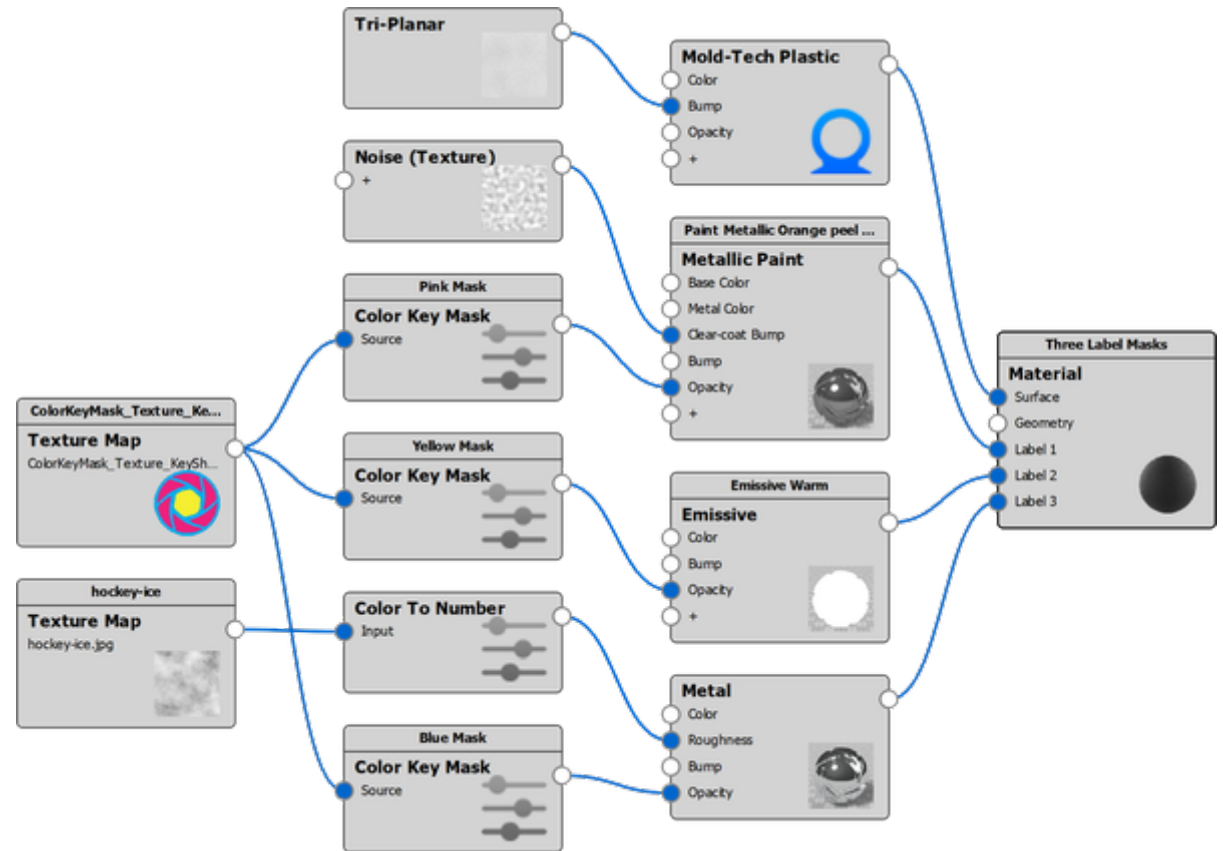


Example 1: Displacement mask

Two Color Key Mask nodes are used to mask out two colors of the texture
One mask is connected to the opacity of a Label material, the other to a Displace node.

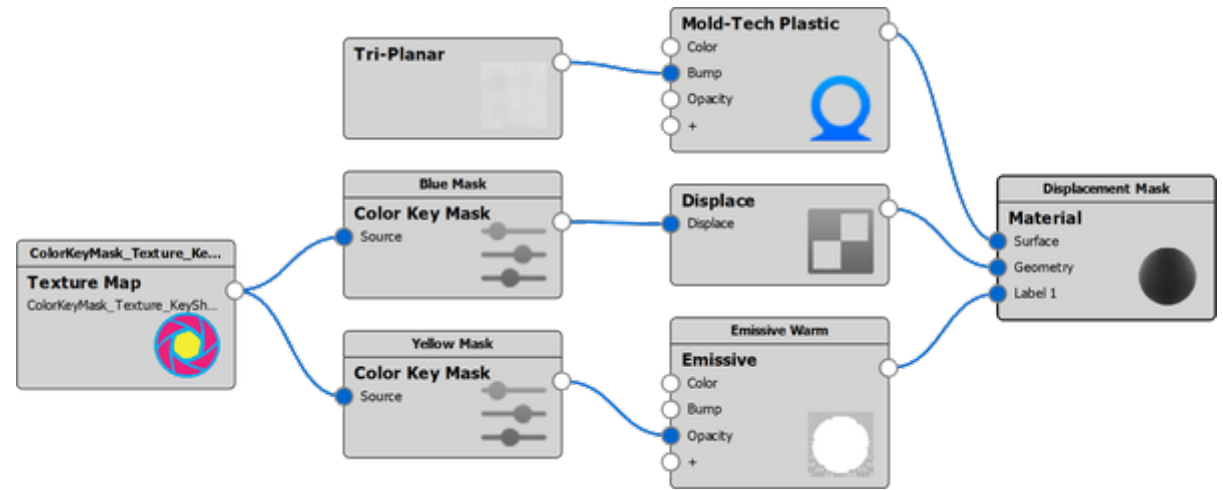

Color To Number

The Color To Number node converts color values to number values. This is usually done implicitly such that black is zero and white is 1, however there are times where you need more control. This is quite useful, for example, with roughness maps where you can use Color To Number to easily map a grayscale image to go from e.g. 0.05 to 0.10 – this would be hard to do otherwise.

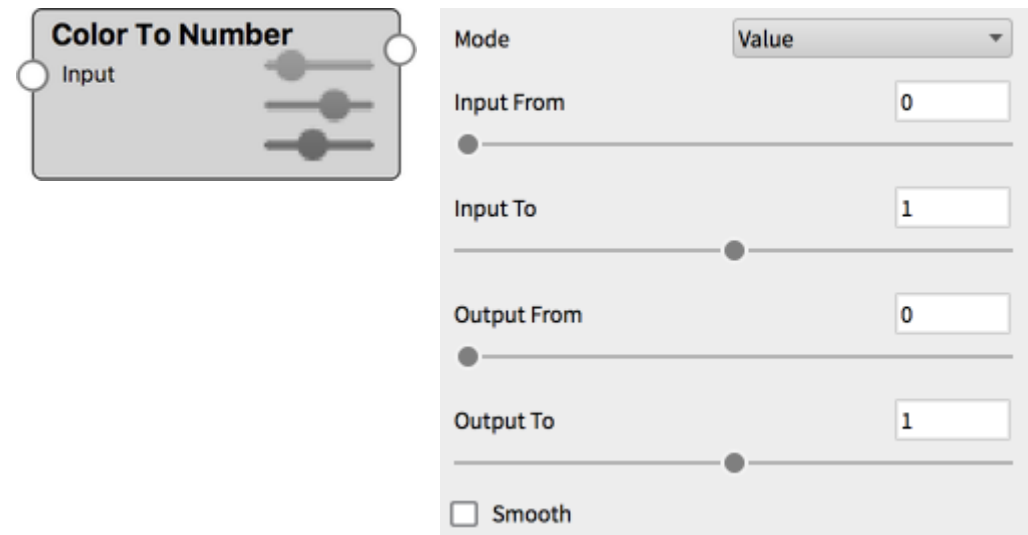



Color To Number example with Roughness

The example below shows a model with a polished metal material onto which a roughness texture will be applied to achieve micro-imperfections on the surface. The third image shows the effect of directly applying above texture to the Roughness parameter of the metal material.



The examples below show the effect of using a Color To Number utility node between the texture and the Roughness parameter.

Color To Number effectively allows to limit the *extent* of the parameter it drives. The driving values will never exceed the range defined by the Output From and Output To parameters.

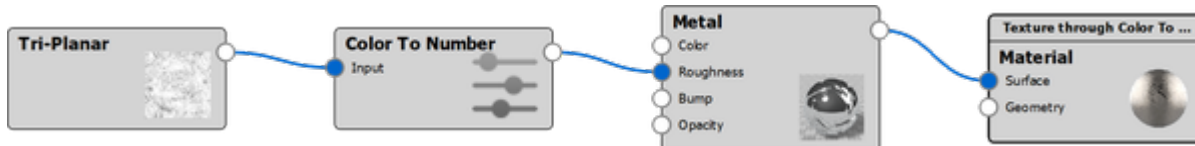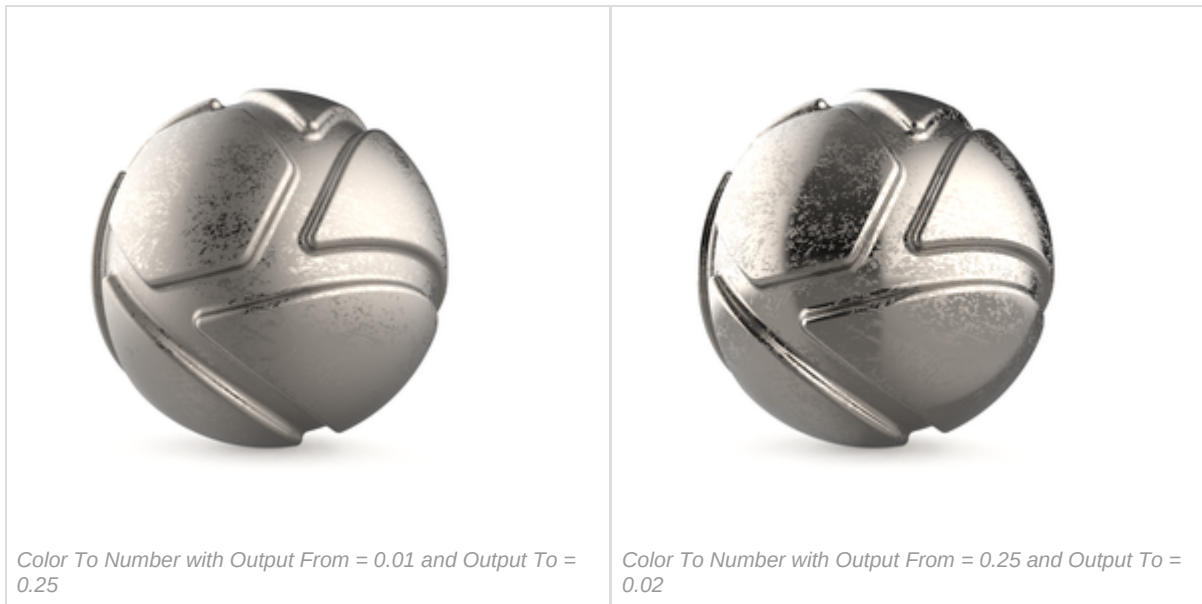

The basic Material Graph structure for using Color To Number for Roughness:
 Texture > Color To Number > Material

Color Curve Randomize

Add color randomness to curves that are assigned a solid color, texture map, or procedural texture.





Mapping 2D

This node enables you to synchronize and control the position of your textures and labels in one place.

Connect the *Mapping 2D* node to all the textures you want to control with it and make sure the Mapping type is set to Node in the properties of each texture.



The texture Size and Mapping that is set in the Mapping 2D node is propagated to all textures it is connected to, thus aligning them. When the Mapping Type for the connected textures is set to Node, the Size and Mapping properties of the texture nodes function as offsets from the Mapping 2D properties. For example, Width and Height become scalar (unitless) and are effectively multipliers of the Width and Height set in the Mapping 2D node.

Note:

To maintain alignment of textures, Move Texture should only be used inside the Mapping 2D node.

Mapping 2D example

The examples below shows how a Mapping 2D node can be used to perfectly align multiple Labels.

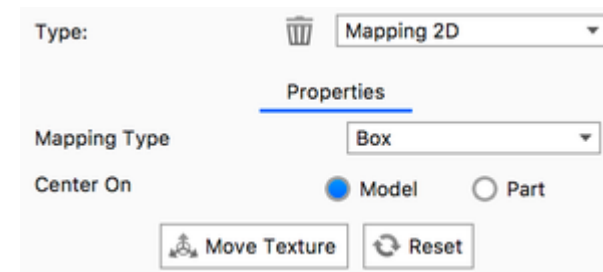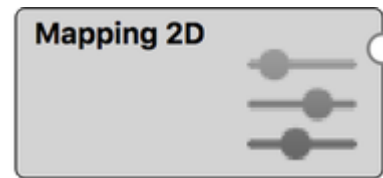

Labels without Mapping 2D




*Mold-Tech plastic material with two Labels that should be aligned
The Width and Height of the colored 'KeyShot Icon' texture is set to 0.02 meter.
The Width and Height of the 'KeyShot Icon White' texture is set to 0.04 meter.
Both textures use Planar mapping and have Repeat disabled.*

Labels with Mapping 2D



*Mold-Tech plastic material with a Mapping 2D node connected to the Label textures.
The Mapping Type in the Mapping 2D node is set to Planar.
The Width and Height in the Mapping 2D node is set to 0.04 meter.
The Mapping Type in both Label textures is set to Node.
The Width and Height of the colored 'KeyShot Icon' texture is set to 0.5 (effective size = 0.02 meter).
The Width and Height of the 'KeyShot Icon White' texture is left at 1.*

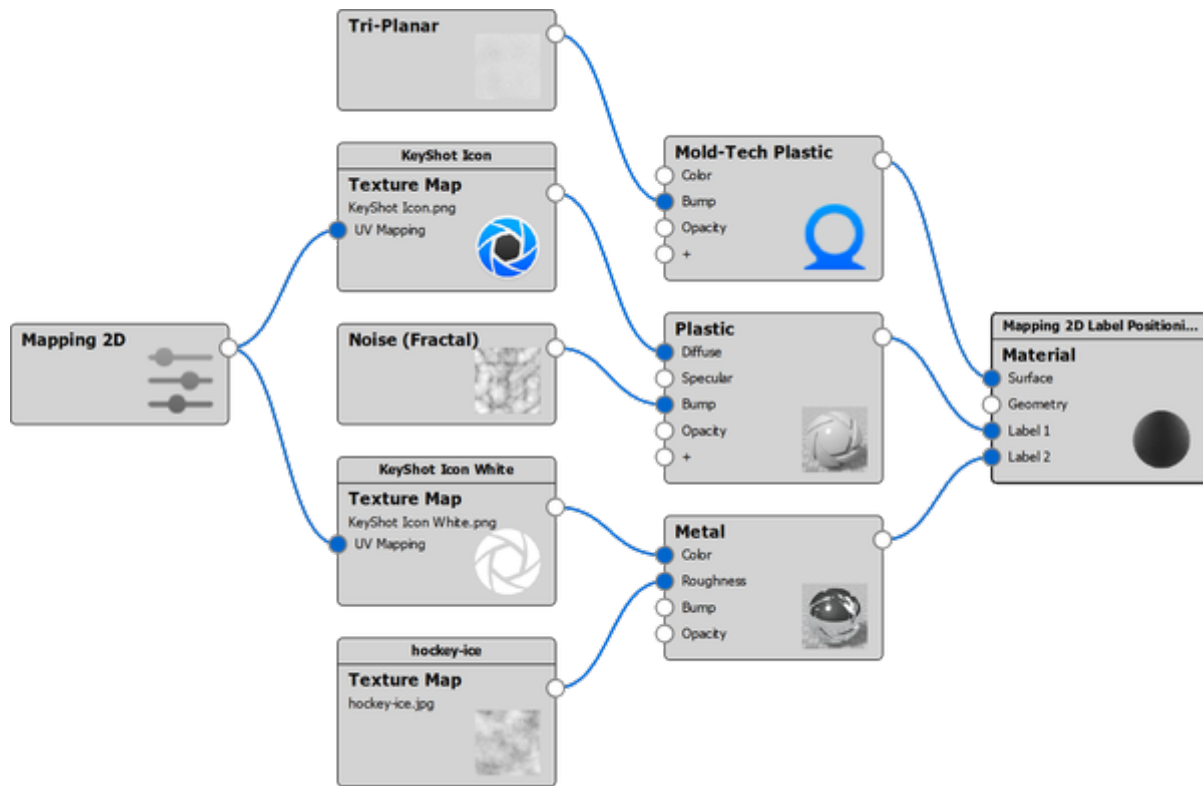

The Material Graph structure of this example.




The result of using Move Texture inside the Mapping 2D node.



The result of resizing inside the Mapping 2D node.

Geometry Node types

The Geometry nodes will transform the shape of your geometry in a non-destructive manner. This way you can always replace the material and the geometry will return to the original shape.

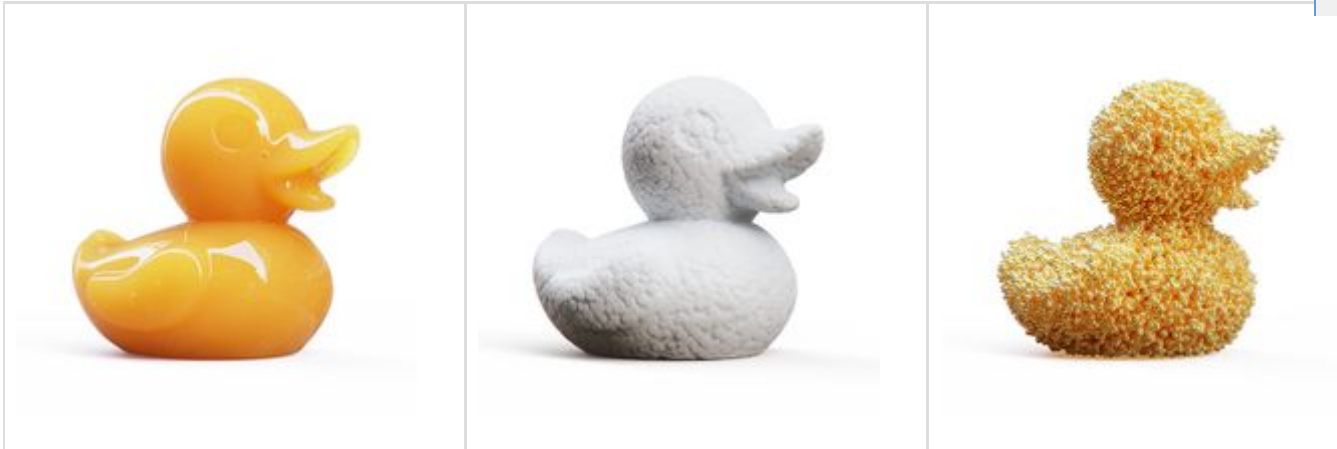

Bubbles in mango juice, Styrofoam displacement and Gold sprinkle flakes applied to the same model.

On this page

- Bubbles
- Displace
- Flakes

Bubbles

Use the Bubbles node when you want to add spheres inside the material of your object. Make sure the material is transparent to some degree - otherwise the bubbles will not be visible. Add a Bubbles node to the Geometry socket of the Root node.

Size

Set the size of the bubbles

Size variation

Fractional variation of flake size

Density


This slider will adjust how close the bubbles are to each other


Flake Limit

The Flake Limit slider allows you to limit the amount of polygons used to create bubbles. The limit is pr. object, not the overall for the material in the scene.

Density Texture:

If you do not want the bubbles to be distributed evenly inside the object, you can add a texture to control the density. This will act as a sort of mask on the density. Where the texture is black, no bubbles will be shown and the amount of bubbles will increase where the texture is lighter - where the texture is white, the density will be as defined in the *Density* parameter. In the example below the color gradient is white in the bottom of the material ball and black on top.

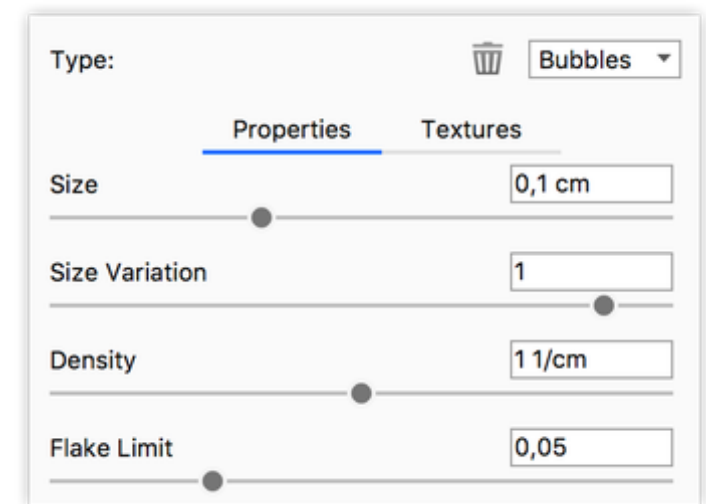

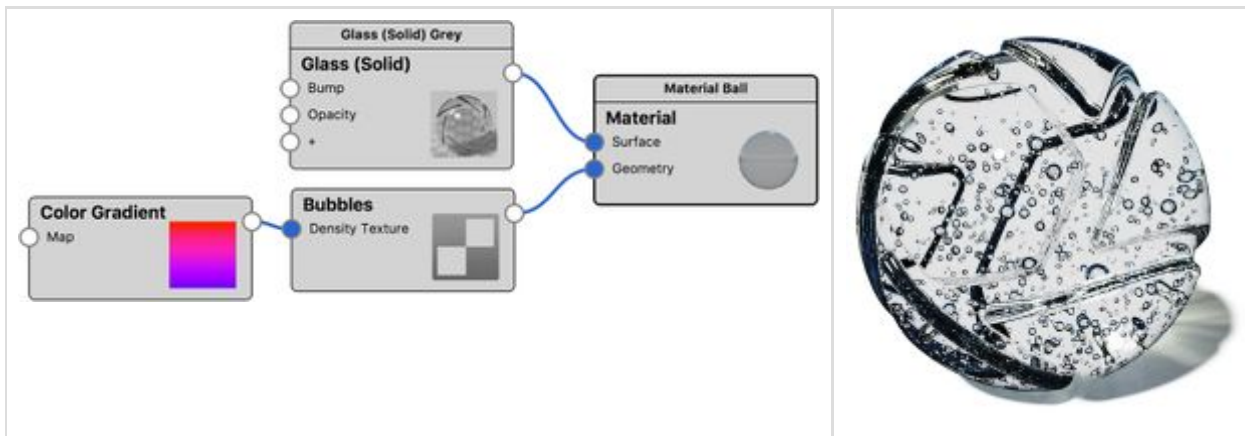

Note

When you are working with Bubbles/Flakes, it is important that your geometry is a closed mesh. If there are gaps in the mesh, the texture will not be applied.

Displace

Use the Displace node when you want to transform the surface of the object. Add a Displace node to the Geometry socket of the Root node and add a Texture to the Displace socket of the Displace node.

Displacement Height

The texture's white areas are displaced with the value set in *Displacement Height* while black areas will not be displaced. Negative values will cut into geometry.

Offset

Adjusts the origin of the displacement. When the Offset is set to 0 (default) the black areas will be on the surface of your geometry


Resolution



Set the size of the triangles that makes up the displacement.

Max Triangles


Here you can control how many triangles the displacement can use.

Displace: In order for the displacement to have effect on your geometry you need to connect a texture. The light areas of the texture will raise the surface of the geometry while black areas stay.

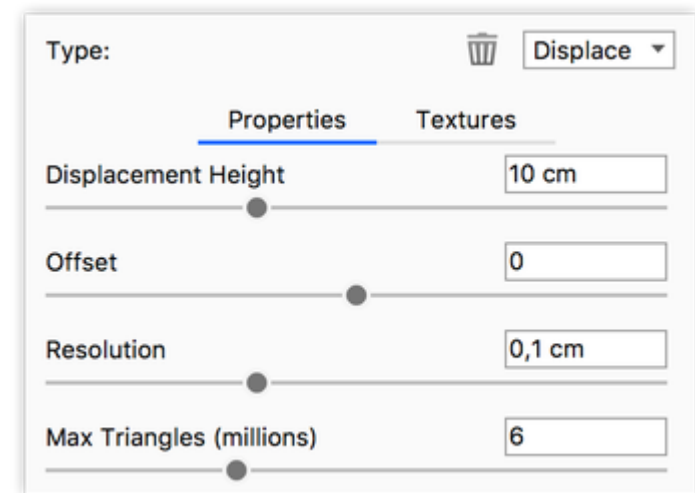


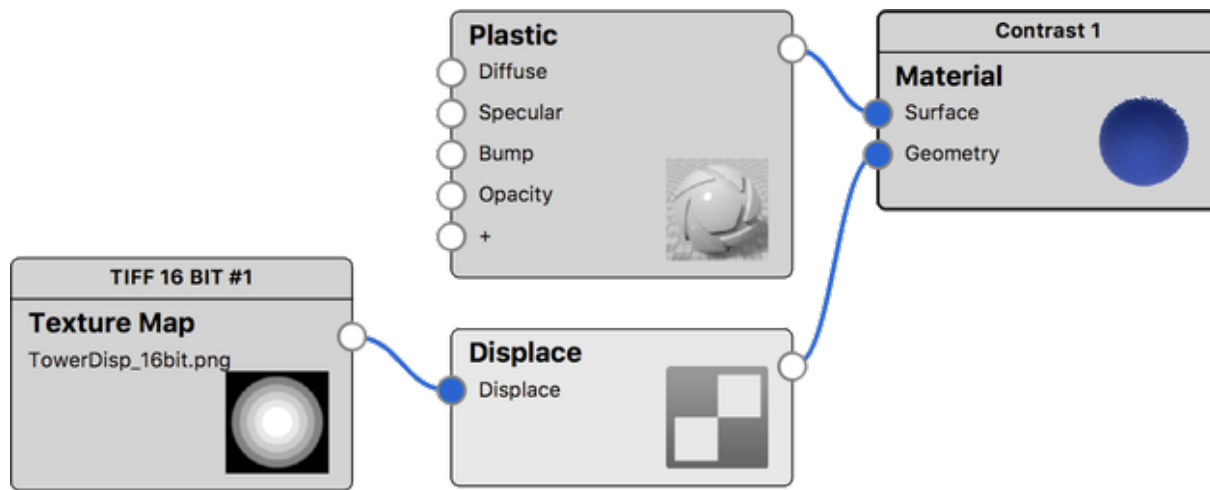

The Texture has concentric circles of grey.
From the center, 0% black, 20% black, 40% black etc.

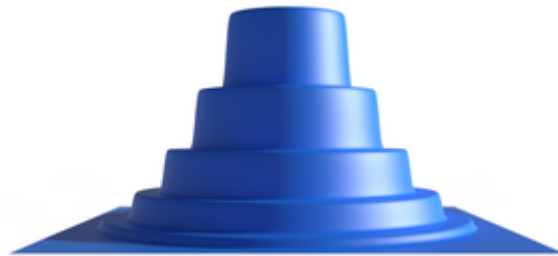

Contrast = 1: The increase in displacement height is not linear.

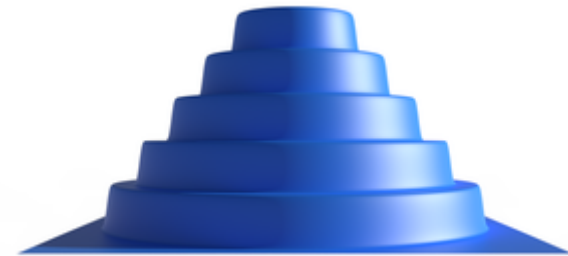

Contrast = 0: Each step adds the same increase in displacement height.

Flakes

Use Flakes when you want your object to be made up of flakes of a specific material. Add Flake node to the geometry socket of the Root node.


Flake Shape

Choose if you want the flakes to be square or spheres

Size

Set the size of the flakes

Size variation

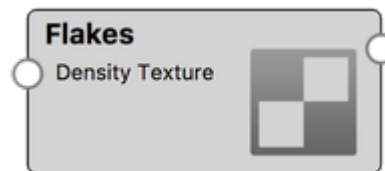

Fractional variation of flake size

Density



This slider will adjust how close the flakes are to each other

Flake Limit

The Flake Limit slider allows you to limit the amount of polygons used to create flakes. The limit is pr. object, not the overall for the material in the scene.

Vertex Colors*


With vertex colors enabled you can make the flakes different shades. In the example below the vertex is combined with a color gradient to make the flakes grey, light blue and dark blue.

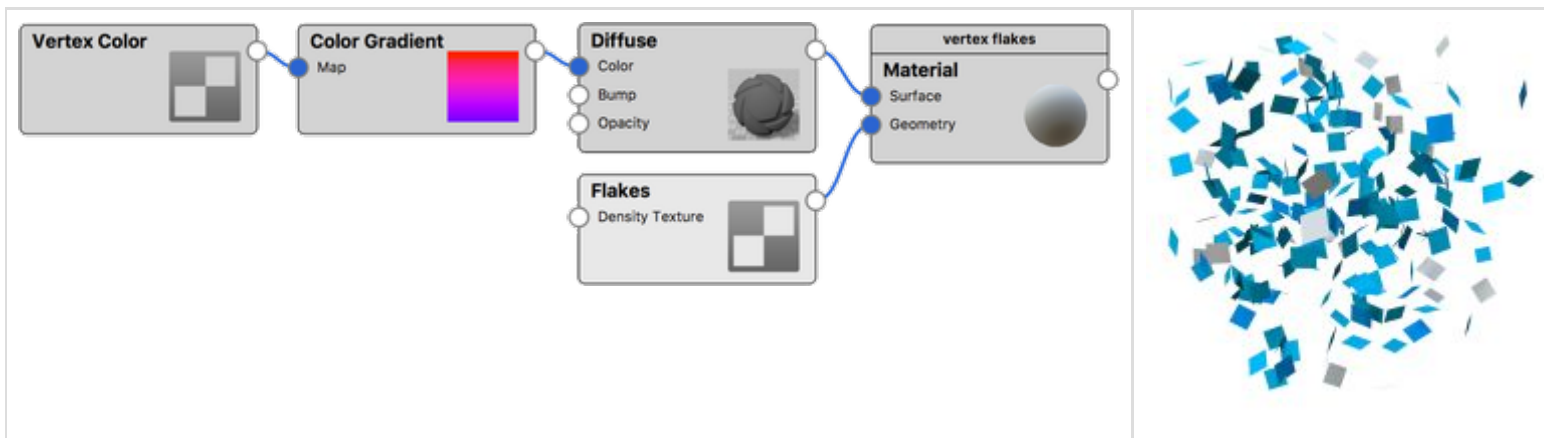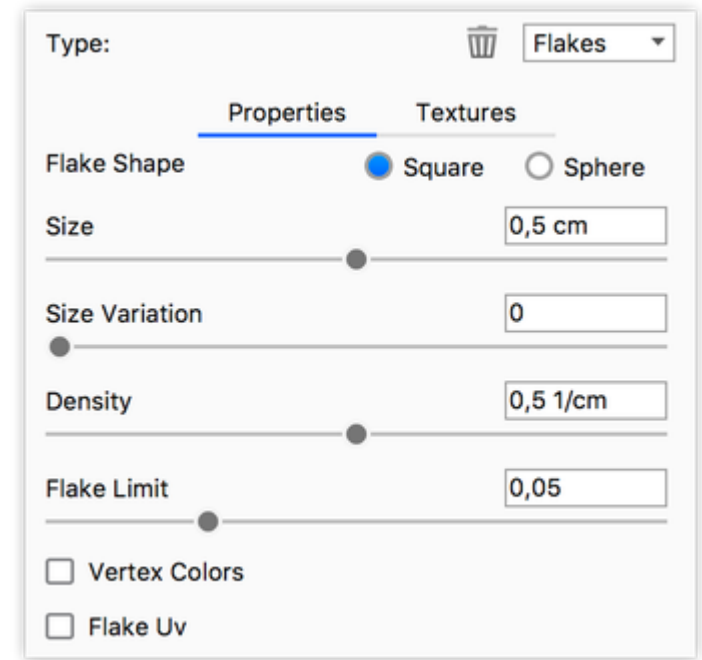

Flake UV*

Enables the use of uv maps on your flakes. In the example below the Keyshot Logo is applied as a UV map to each flake which

are made round using the same texture as an alpha opacity map.

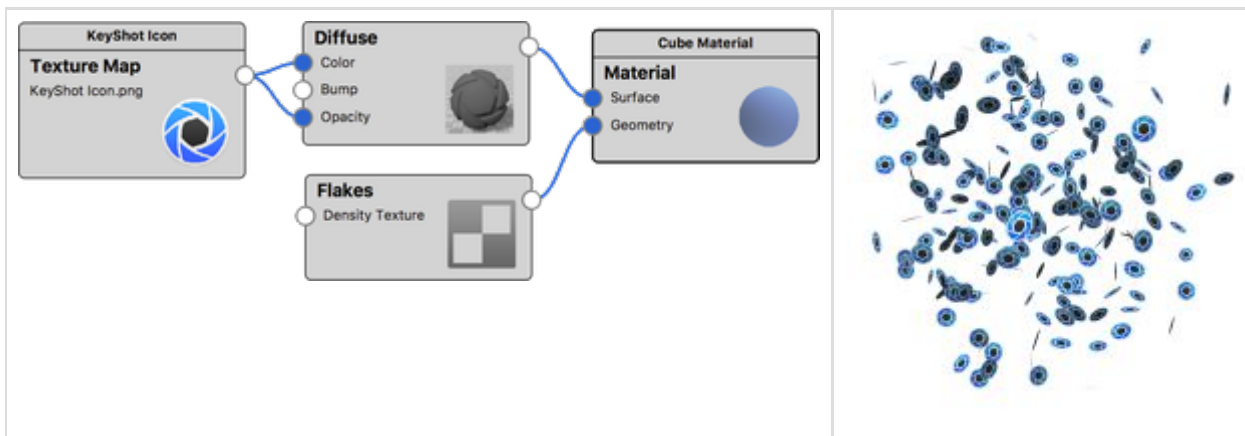

*Can only be used with *Square* flakes

Density Texture:

If you do not want the flakes to be distributed evenly inside the object, you can add a texture to control the density. This will act as a sort of mask on the density. Where the texture is black, no bubbles will be shown and the amount of flakes will increase where the texture is lighter - where the texture is white, the density will be as defined in the *Density* parameter.

Note

Geometry nodes are the only nodes that does not update your material in real time when you edit/set them up.

To see any changes you make you must hit the  **Execute Geometry Nodes** in the properties panel, the  **Geometry Nodes** in the ribbon or use the hotkey *Alt+G*, before you can see the effect in the Real-Time View - this will refresh all geometry nodes in the scene.

Tip

If you want to bake your displacement into the geometry, you can export your displaced object and re-import it into your scene.


Known Issues and Limitations

- Bubbles, Displacement and Flakes are not supported in Render Nurbs Mode
- Attaching a Curve Color Randomizer to a Geometry node causes crash.
- When applying Displacement to geometry with hard edges, these edges become split.

Multi-Materials

Any material can be turned into a Multi-Material to facilitate non-destructive material swapping, variations or color studies. The Multi-Material allows you to cycle through a variety of materials within a single “container” material.

Converting to Multi-Materials

When editing a material select the three-arrow *Multi-Material* icon  above the *Material Type* dropdown to convert a single material to a Multi-Material.

Warning

Dragging and dropping a material from the library onto the part will overwrite the multi-materials applied. Use *Ctrl-Z/Cmd-Z* to Undo.

Adding Multi-Materials

There are several ways to add a new material to the Multi-Material list:

- **Drag-and-drop**

Simply drag-and-drop a material preset from the Materials library into the Multi-Material list.

- **New Plastic**

Select the *New Plastic* icon  on the left of *Multi-Material* list. This will add a standard Plastic material.

- **Duplicate Material**

Select the *Duplicate Material* icon  on the left of the *Multi-Material* list. This will duplicate the material selected along with any texture and/or label, but keep the textures and labels unlinked.

- **Duplicate Material and Link Textures**

Select the *Duplicate Material and Link Textures* icon  on the left of the *Multi-Material* list. This will duplicate the material selected along with any texture and/or label, but keep the textures and labels linked.

Viewing Multi-Materials

To view or edit the different materials in your list, simply select a material to make it active in the *Real-time View*. You may also use the arrow keys to cycle up or down through the list.

The thumbnail of in the In-Project Library will show the active material combined with a label signifying that the material is a Multi-Material.

Saving Multi-Materials


Like regular materials you create, you can also save Multi-Materials. To save a Multi-Material, select the save icon  and select the folder you would like to save it in.


On this page


- [Converting to Multi-Materials](#)
- [Adding Multi-Materials](#)
- [Viewing Multi-Materials](#)
- [Saving Multi-Materials](#)
- [Removing Multi-Materials](#)

Removing Multi-Materials

To remove a material from the *Multi-Material* list, select the trashcan icon  or hit *Delete*. Additionally, you may overwrite all materials added to the list by dragging and dropping another material onto the part or cancel Multi-Material setup by selecting

the three-arrow *Multi-Material* icon  to close the Multi-Material list.

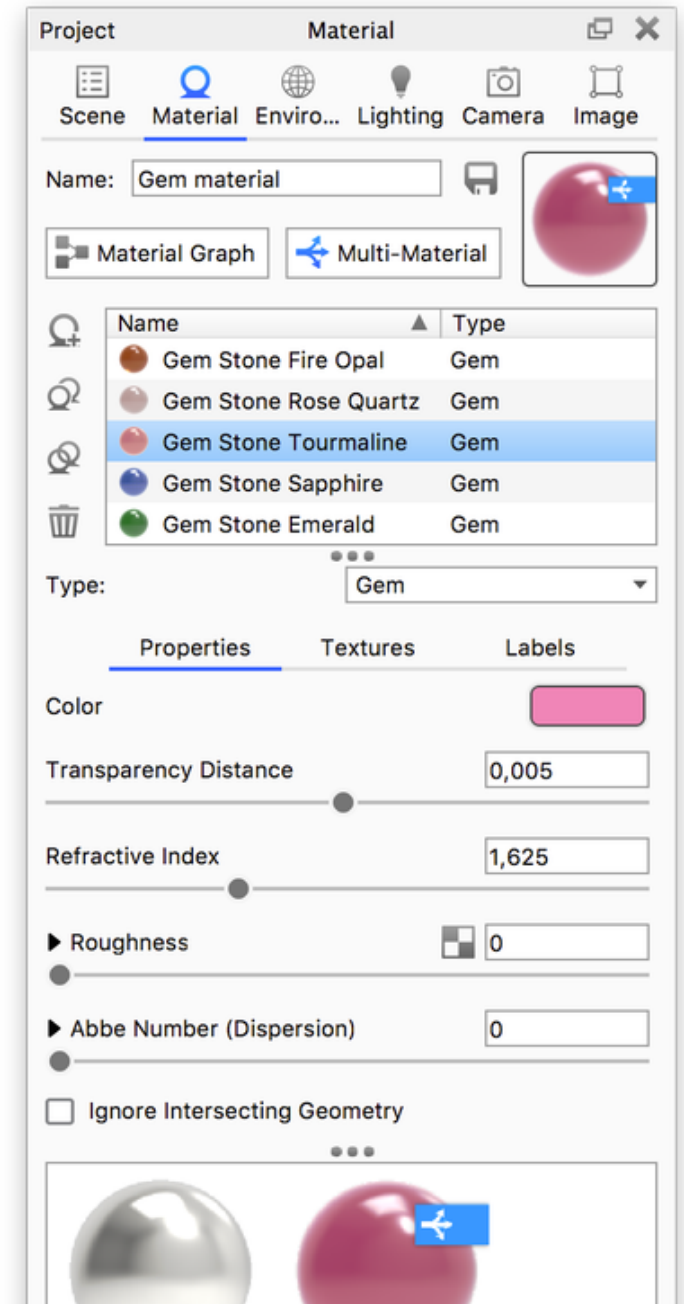

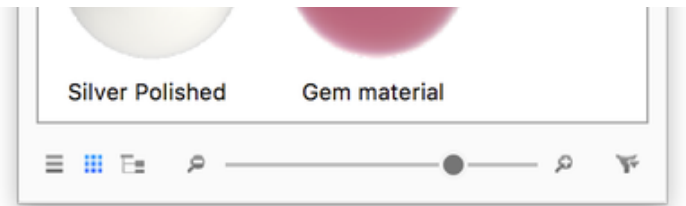

Material Templates

Material templates automate the material application process e.g. when importing cad models to the scene.

Material Templates are a powerful feature in KeyShot that automate the materials applied to your model in a scene. Anyone working with large assemblies can save time using Material Templates to automatically apply materials to parts in a scene. Once a material template has been created, it can be used to apply materials to a new model upon import.

With a material template, materials from the KeyShot library are applied to your model's parts based on the name of each part's original materials.

Launch the Material Template window from the *Main menu > Window* or from the material template icon  in the Ribbon.

Create Template

Create a new template by clicking on the add icon.

Method

Two methods can be used in creating a material template, *Automatic* and *Manual*.

- **Automatic** – If a model is in KeyShot when you create a new template, the source and material names are automatically populated based on the material applications in the current scene. Only parts that have a KeyShot material will be recorded.
- **Manual** – An empty template is created and you can add template rules manually.

Type

You also have to choose whether the template should apply materials based on part name or original material name.

- **Part name** - This method will apply materials based on the names of the parts, so it requires that the naming of the models are consistent - You can use wildcards to target parts that are named alike e.g. parts with Holder in the example to the left.
- **Source material** - This will make the naming of the parts less important and apply materials based on the source material. If your models have been colored consistently, the source material may be the way to go.

Wildcard

The wildcard refers to the practice of applying a material to several parts using the source name. This can be activated by inserting asterisks (*) to the source name - e.g. *Holder** this will apply the material in the destination to all the parts containing “Holder” when the material template is applied.

Each new template is added to the template list, which can be accessed with any scene opened in KeyShot.

Add Template rules

The Automatic approach will populate the template with rules for all KeyShot materials in the scene while the Manual approach requires you to pick the parts you want to set up rules for. You can at any time add rules to the template, no matter if it was created using the *Manual* or the *Automatic* method.

On this page

- [Create Template](#)
 - [Method](#)
 - [Type](#)
 - [Wildcard](#)
- [Add Template rules](#)
- [Applying Templates](#)
 - [Material Template Dialog](#)
 - [Import Dialog](#)

A template rule consists of a *Source* (either part name or source material name) and *New Material* name.

Use the  button next to the template to create a new rule and add a source. Or drag a part from the Scene Tree onto the list - this will create a rule with the name or source file from the part.

Add a Material to the rule by dragging a material from the Material library/Material tab onto the rule in the template list.

Applying Templates

Applying templates can be done through the "Material Templates" window or the import window.

Material Template Dialog

Templates can be applied using the *Apply* button. This will give you two options: *To Scene* or *To Selection*.



- **To Scene**
Apply the current template to the entire scene.
- **To Selection**
Apply the current template to the selected model or part.

Import Dialog

Expand the *Materials and Structure* section to reveal the *Use material template* checkbox.

Enable this setting and select the desired template from the list.

Click *Import* to complete the import.

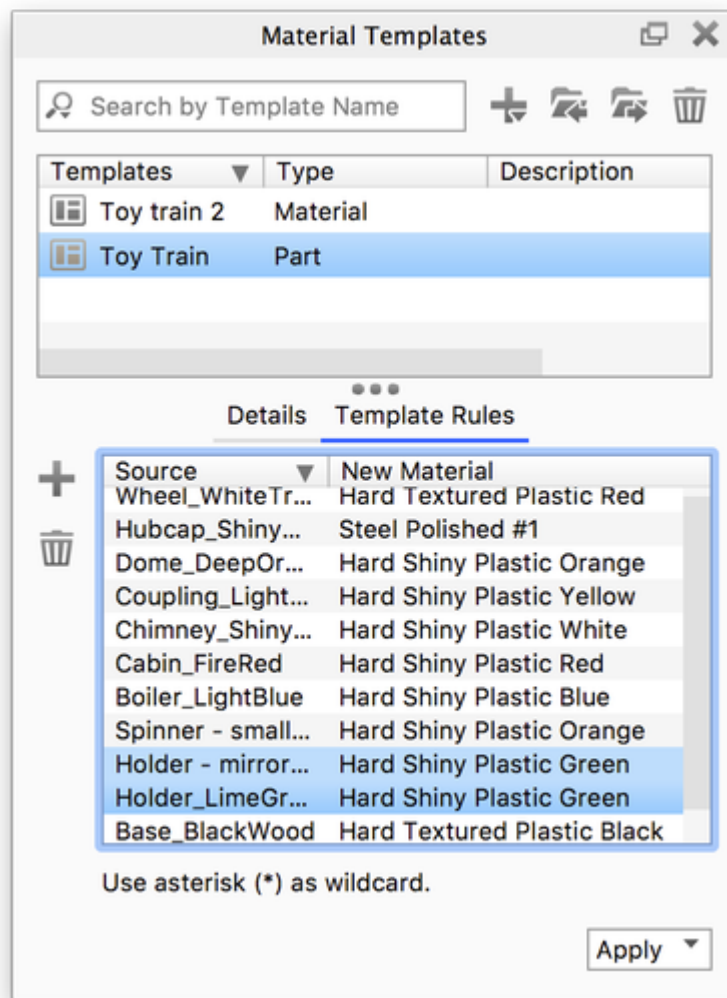

> Scene

> Location

> Up Orientation

> Environment and Camera

▼ Materials and Structure

Group by Object ▼

☐ Separate Materials by Part

☐ Retain Materials

☐ Assign Materials from Library

☒ Use Material Template Toy Train ▼

> Geometry

Cancel

Import

Textures

Textures allow images to be mapped to materials to create detailed effects such as wood grain, meshes, tile as well as fine imperfections such as brushed metals.

Texture Library


KeyShot comes with a number of textures which can be found in the [Texture Library](#) in the *Library* window - And more can be downloaded from [KeyShot Cloud](#).

Texture Properties

Textures are applied in the *Material* properties tab under the *Texture* tab. Here you find

1. [Map Types](#)
2. [Texture Types](#)
3. [Mapping Types](#)
4. [Move texture tool](#)

All are described in The following section.

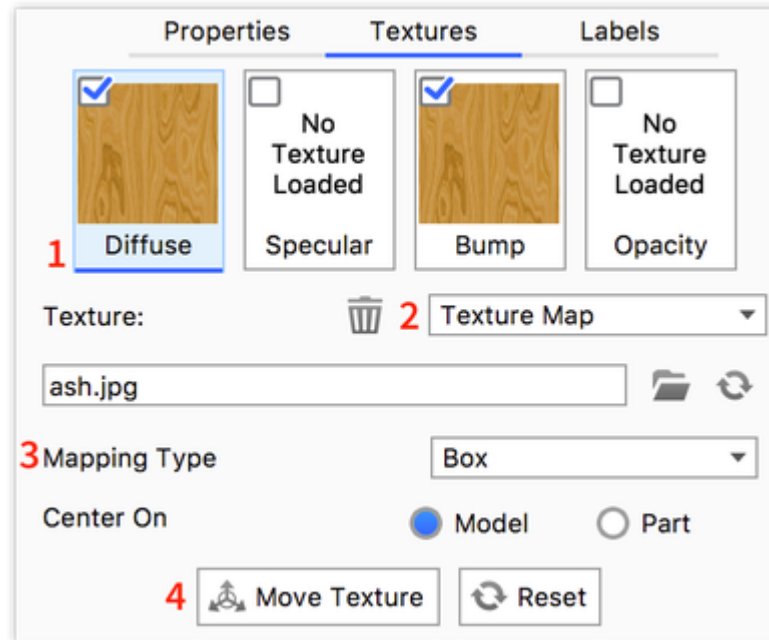

In this section

- [Texture Library](#)
- [Texture Types](#)
- [Map Types](#)
- [Mapping Types](#)
- [Move Texture](#)

Texture Library

Access the KeyShot *Textures* Library by clicking the *Library* button on the main toolbar, selecting *Window, Library* from the main menu or by hitting the 'M-key'.

The textures located here provide a range of textures to use for bump maps, color maps, gradients, labels and more. These textures provide a fast way to start applying textures to your materials for added realism or a starting point for developing your own textures.

Search

Here you can search in the Texture Library. To narrow the search you can select a folder before you enter your keyword, then the search will be limited to that folder.

Add Texture folder

You can add your own custom folder to the library. just press the  Add folder icon and give the folder a name. Note that the folder will be placed inside the currently selected folder.


Import

If you have textures of your own you want added to the library you can  import them.

Refresh

Clears the search and displays all textures again.

More textures are available on [KeyShot Cloud](#).

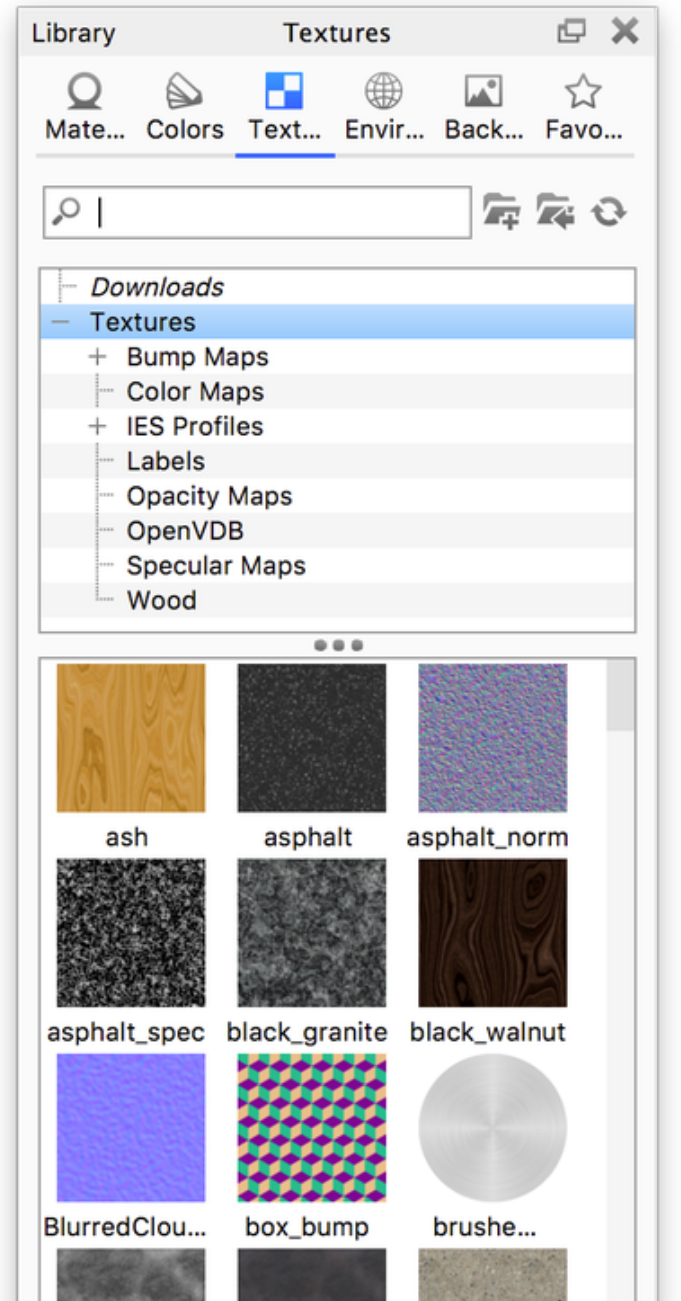



Texture Types

KeyShot has three primary types of Textures that can be applied to materials: *Image Textures*, *2D Textures*, and *3D Textures*. Each of these are accessible from the *Project* window, *Material* tab, *Texture* tab. Image Textures use an image file as a texture. 2D and 3D Textures are procedurally generated textures. The three types of Textures include:

Non-Procedural	Procedural	
Image Textures	2D Textures	3D Textures
- Texture Map - Tiled UV - Tri-Planar - Video Map	- Brushed - Mesh - Weave	- Brushed (Radial) - Camouflage - Cellular - Color Gradient - Curvature - Granite - Leather - Marble - Noise (Fractal) - Noise (Texture) - Occlusion - Scratches - Spots - Vertex Color - Wood - Wood (Advanced)

On this page

- Image Textures
- 2D Textures
- 3D Textures
- Animation
- About Procedural Textures

Animation

In addition to the regular texture types users of KeyShot Pro can also add Animations (only to Color and Opacity maps)

- Color Fade
- Number Fade

About Procedural Textures

Procedural textures are computer-generated, customizable textures that allow you to control the values and color of the texture. KeyShot allows you to create textures in real-time viewing the changes as you make them. In comparison to traditional texture mapping, procedural textures wrap around your model without leaving seams or stretching, regardless of the model's shape. Use the *Texture* type drop-down to choose the procedural texture you would like to use.

Texture Map

A *Texture Map* is an type of Image Map. Texture maps and their settings can be viewed in the *Project* window, *Materials*, *Textures* tab.

Adding a Texture Map

Double-click the texture [Map Type](#) (e.g. Color, Specular, Bump) you would like to add a texture to. This will open a window where you can choose the image file to apply as a texture map. You may also drag and drop textures from the Textures library.

Removing a Texture Map

If you want to delete a Texture Map, right-click on the texture *Map Type* and select *Delete* or select the trashcan icon  next to the *Texture* dropdown. This will remove the selected texture from your material. If you make changes to the image file used for the Texture Map, select the Refresh icon  to update the *Texture Map* and see the changes. If you would like to replace the image file used for the *Texture Map*, select the File icon  to choose a new image file.


On this page

- [Adding a Texture Map](#)
- [Removing a Texture Map](#)

Tiled UV

A *Tiled UV* texture is an type of Image Map. *Tiled UV* textures and their settings can be viewed in the *Project* window, *Materials*, *Textures* tab.

Tiled UV is KeyShots approach to UDIM where multiple textures are positioned on the model using UV coordinates. The Tiled UV texture requires that the model have been made ready for it in your modelling software.

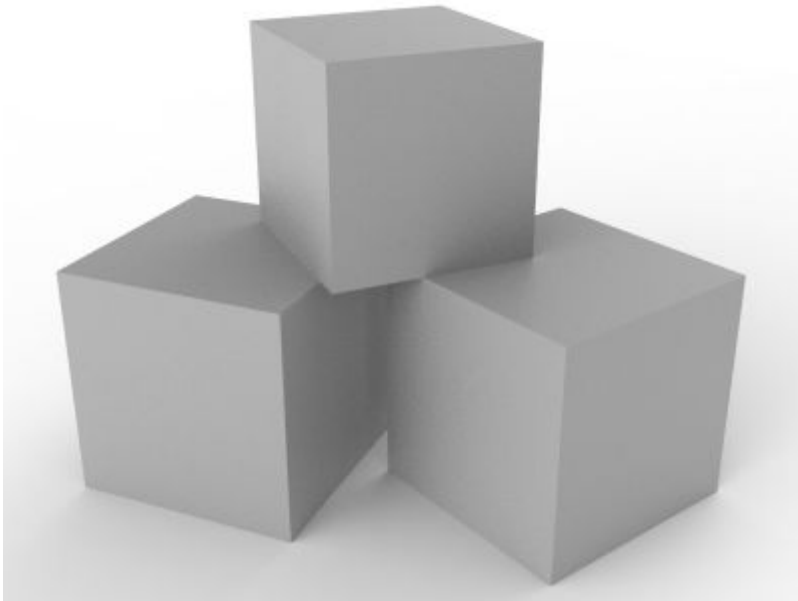

Properties

Textures

Labels

☒ 1
cube_1001_00
cube_1001
Color

☐ No
Texture
Loaded
Bump

☐ No
Texture
Loaded
Opacity

Texture: Tiled UV

▼ Texture Tiles

Filename	U	V
cube_1001.png	0	0
cube_1002.png	1	0
cube_1003.png	2	0
cube_1011.png	0	1
cube_1012.png	1	1
cube_1013.png	2	1

Filtering

Anisotropic

Filter Bias

-2

▼ Color

Brightness

1

Texture Gamma

1,71



The same cubes with a plane plastic vs. Tiled UV texture.

Applying Tiled UV

Select your material and add a Tiled UV texture to e.g. the diffuse map.

Browse and select one of the texture tiles. If the tiles are properly named KeyShot will recognize the rest of the tiles and add them automatically.

Texture Tiles

To be sure the tiles are recognized and positioned correctly the tiles need to be named according to one of these conventions:

1. *NameuXXvYY* - Where you can choose to add a separator between the name and U and V values (e.g. cube_u0_v0, cube_u1_v0 ...)
2. *NameUDIM* - Where you can choose to add a separator between the name and the UDIM number (e.g. cube_1001, cube_1002 ...)



Filtering

For Tiled UV texture you can control the texture filtering for each texture directly:

- **Trilinear** is the simplest and fastest method, but may result in excessive blurring in certain cases.
- **Anisotropic** is higher quality than trilinear and should give less blurring and sharper textures in most cases
- **Elliptic** is the most accurate filtering but can be quite slow.

Filter Bias

Adjust the filtering method to give more blurry textures (negative values) or sharper textures (positive values).

Color

Brightness

Adjust the brightness of the texture tiles.

Texture Gamma

Specify the gamma of the source texture. If you use linear color textures set it to 1. If there is doubt about this value, it is likely 2.0 or 2.2. Can also be used as an ad-hoc control of the contrast of the texture.

Note

Most texture maps are created in 32 bit, which are not gamma corrected. This is why the default gamma value is set to 1. If you are using gamma corrected textures you will need to adjust the Gamma in order to get the right appearance of the colors.

Tri-Planar

Tri-Planar texture is an type of Image Map. Tri-Planar textures and their settings can be viewed in the *Project* window, *Materials*, *Textures* tab.

The Tri-Planar texture enables you to create materials that have different textures on the 3 planes of the object - which can be useful when creating such materials as plywood.

This texture type is only available as box mapping, as the essence of the texture type is that it projects a different texture onto each of the X Y Z planes.

Move Texture

When using the [Move Texture](#) tool the 2 textures that are parallel to each axis will be moved when translating along an axis.

Angle

See the [Move Texture](#) page for description.

Blend Seams

If your planes does not meet in hard edges, you will need to blend the 2 textures at the seam. Increasing the value will create a softer blend.

Projection X Y Z

File

Select the texture you want to be projected onto the X/Y/Z plane of the model.

Size

Set the Width and Height of the texture.  Lock Aspect will secure a uniform scale of the texture and with  reset you can always return to the original aspect ratio.

Angle

This will rotate the texture on the current plane.

Color

Brightness

Adjust the brightness of all 3 textures.

Contrast

Adjust the contrast of all 3 textures.

Blend with color

This will add a color-blend to all 3 textures.

Sync

Check sync if you want to keep this texture synchronized with the other textures on this material



Properties

Textures

Labels

☒



Diffuse

☐

No Texture Loaded

Specular

☒



Bump

☐

No Texture Loaded

Opacity

Texture:  Tri-Planar

Center On ☒ Model ☐ Part

 Move Texture

 Reset

► Angle

0 °

Blend Seams

1,186

▼ Projection X

WoodFine04_COL_VAR1_3K.ktx

 Width X

5

 Height X

2,619

Angle X

-90°

▼ Projection Y

WoodFine01_COL_VAR1_3K.ktx

 Width Y

5



Height Y

7,03

Angle Y

90°

▼ Projection Z



Angle Z

90°

▼ Color


Brightness

1

Contrast

1

☐ Blend with Color



☒ Sync

Properties

Textures

Labels


☒

Diffuse

☐

No
Texture
Loaded

Specular

☒

Bump

☐

No
Texture
Loaded

Opacity

Texture:  Tri-Planar

Center On ☒ Model ☐ Part

 Move Texture

 Reset

► Angle

0 °

Blend Seams

1,186

▼ Projection X

WoodFine04_COL_VAR1_3K.ktx   

 Width X

5

 Height X

2,619

Angle X

-90°

▼ Projection Y

WoodFine01_COL_VAR1_3K.ktx   

 Width Y

5



Height Y

7,03

Angle Y

90°

▼ Projection Z



Angle Z

90°

▼ Color


Brightness

1

Contrast

1

☐ Blend with Color



☒ Sync

Video Map

A *Video Map* texture is an type of Image Map. *Video Map* textures and their settings can be viewed in the *Project* window, *Materials*, *Textures* tab.

With a *Video Map* textures, image sequences can be set as Textures (or Labels) to animate device displays and much more.

The supported formats include:

- avi
- mp4
- mpeg
- flv
- webm
- dv
- f4v
- mov
- mlv
- m4v
- hevc
- ogg
- ogv

Some formats may have variants encoding which are not supported (for example, avi may include encodings which may not be directly supported.)

Adding a Video Map

From *Project*, *Materials*, *Textures* select *Video Map* from the *Texture* drop-down menu or *Add Label (Video)* from the *Labels* tab. Select an image sequence in the file browser or a video file to extract the frames. This will create a node in the *Animation Timeline* in which you can position and adjust the animation similar to other Animation types.

Frames

To add frames you can:

- add a sequence of images
- select a video and KeyShot will extract the frames for you.

Blend Frames

When enabled the transition from one frame to another will be blended. This can be useful e.g. if the FPS of your video map is smaller than the overall animation in which case blending frames can prevent the video from flickering.

Size and mapping

See the [Move Texture](#) page

Color

Brightness

Adjust the brightness of the frames.

Contrast

Adjust the contrast of the frames

On this page

- [Adding a Video Map](#)
 - [Size and mapping](#)
 - [Color](#)
 - [Time Settings](#)

Blend with Color

Blend all frames with the selected color

Time Settings

Motion Ease

This will let you add acceleration and deceleration to the video texture. This not something you would usually use for regular videos. But the Video map can also be used for e.g. changing displacement textures in which case motion ease is relevant.

Start, End, Duration

Playback mode

Determines how frames are distributed on the timeline.

- **Video** - All frames are distributed equally on the timeline so they will be visible for the same amount of time.



- **Slideshow** - The last frame is moved to the very end of the timeline and the rest of the frames are distributed accordingly.



This is relevant e.g when operating with few FSP and blend frames are enabled as shown in the example below, where the green cube is in video playback mode and the blue is in slideshow mode. Notice that in video mode the 5th frame is visible relatively longer than the other frames.



Playback Count

Here you can set the number of times the video is played.

Texture:  Video Map

▼ Frames 

keyshot8featurevideo_01293.png

keyshot8featurevideo_01294.png

keyshot8featurevideo_01295.png

keyshot8featurevideo_01296.png

keyshot8featurevideo_01297.png

☐ Blend Frames

...

Mapping Type Planar

Center On ☒ Model ☐ Part

 Move Texture

 Reset

> Size and Mapping

▼ Color

Brightness

1

Contrast

1

☐ Blend with Color

▼ Time Settings

Motion Ease Linear

Start

0 m

0 s

0 ms

End

0 m

1 s

0 ms

Duration

0 m

1 s

0 ms

FPS (Frames Per Second)

This sets the frame rate - increasing the frame rate will give a smoother video while decreasing the frame rate will produce a more blurred or even flickering result.

Playback Mode

☒ Video ☐ Slideshow

Playback Count

1

FPS

30

Brushed

The Brushed procedural texture simulates the effects of brushed metal. It is best used as a bump on a metal material with a low roughness value.

Bump Height

Use this to set the depth of the brushed texture

Color

Color 1/2

Use this to set the color for the highlights and shadows of the texture.

Grooves

Length

Use this to control the length of the brush strokes.

Contrast

Use this to control how defined the brush strokes are as a whole.

Levels

controls the amount of brush strokes.

Levels falloff

Use this to control how defined each brush stroke is.

Variation

Grain

This slider controls the amount of grain that is added to the brushed texture

Grain size

Here you can control the size of the grain

Distortion

this slider will add distortion to the brush strokes.

Apply bump to labels

When enabled the bump map will also be applied to any labels on the material.



Mesh

Create a pattern of shapes that can be used for meshes in the opacity map, or a shape pattern in color maps.

Color

Color

This sets the shape color. Set the color to black to create holes if you are using the texture as an opacity map.

Background

This sets the background color. Set the color to white if you are using the texture as an opacity map.

Show Outline

This enables you to add a colored/textured outline to the shape. The outline is placed on the inside edge of the shape.

Blend Outline with Color

When enabled the outline color/texture is blended with the color/texture of the shape.

Outline Size

Determines the width of the outline on a scale from 0-1, where 0 is right on the edge and 1 is in the center of the shape.

Shape and Pattern

Scale Mesh

Scales the size of the mesh affects both the size of the shape and the spacing.

Shape

Here you can choose between different shapes for your mesh.

Falloff

Adds feather to the edges of the shapes. The slider sets the width of the falloff. A value of 0 is equal to no falloff.

Shape Diameter/Width and Height

Depending on the shape size you can set the size of the shapes with diameter/width and height. When setting the width and height you can  lock aspect to scale uniformly and  reset to revert to the original aspect ratio.

Shape Angle

This will rotate the shape.

Mesh Pattern

Set the pattern you want to use for your mesh. You can either choose one of the standard patterns or define a custom pattern.

Variation

Jitter


Increase this value to add deviation to the pattern.

Distort

Increase this value to randomly distort the shape.

Distort Scale

Values above 1 decreases the distortion scale. Values below 1 increases the distortion scale.

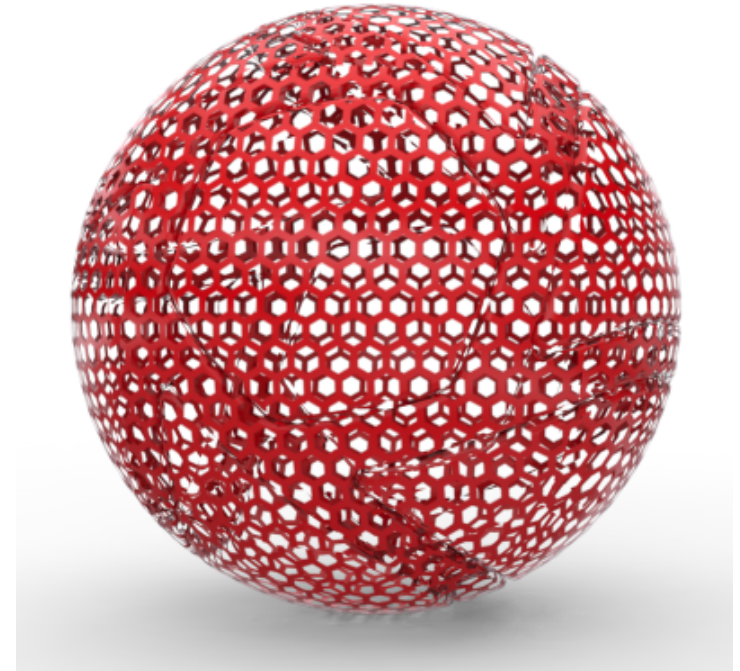

Here the mesh texture have been used as an opacity map to add holes in the surface, without having to model them.

Weave

The Weave procedural texture can be used to simulate many types of fabrics and fine woven meshes.

Color

Background Color

This sets the color of the gaps between the threads.

Warp Color

Sets the color of the vertical threads in the weave.

Weft Color

Sets the color of the horizontal threads in the weave.

Variation

Fibers

Adds a stroked effect to the threads that creates the appearance of fibers in the thread.

Grain

Adds grain to the threads.

Weave Distortion

Makes the threads uneven in thickness.

Color Variation

Adds variation to the intensity of the thread colors.

Width Variation

Makes some threads thinner and some thicker, giving the weave a more handcrafted look.

Threads

Warp Width

Adjust the width of the horizontal threads in the weave

Weft Width

Adjust the width of the vertical threads in the weave

Shape

with this slider you can adjust how flat/round the threads are. A value of 0 produces flat threads and 1 gives round threads. This setting is only relevant if the Thread Shadows are enabled

Thread Shadows

Enables the shadows that create the illusion of round threads.



Brushed (Radial)

Use the Brushed (Radial) procedural texture for a spun brushed metal finish.

Mapping Tool

Use the mapping tool to place the center of the brushed texture. See description [here](#).

Scale

Use this to control the scale of the texture.

Angle

See description [here](#).

Color 1/Color 2

Choose contrasting colors here to create a ringed brushed pattern.

Radius

Radius

Use this to control the amount of rings are generated.

Falloff

Increase this value to reduce the contrast between the colors selected.

Variation

Angle Noise

Increase this value to vary the width of the rings.

Distortion Noise

Increase this value to deviate the rings from a perfect circle. For a traditional spun brushed finish, you will want to leave this parameter at 0.

Advanced

Radial Axial Blend

Use this to create continuous textures on a cylinder that continues into a rounded cap. For most applications you will leave this at default.

Sync

Textures on this material node with sync enabled will be scaled/moved/adjusted concurrently.



Camouflage

Use the Camouflage procedural texture to simulate camouflage textures used in the real world.

Scale

Change the scale of the overall texture to fit the model.

Color 1/2/3/4

Set the mix of colors to be used in the texture.

Color Balance

Colors 1-4 are dispersed through the pattern in descending order, so there are more spots of color 1 than color 3 or 4. Increase this parameter to balance the ratio of colors, or reduce the parameter to increase the difference.

Distortion

Change this parameter to control the amount of shape complexity the spots have.

Distortion Scale

This controls the size of the grain that makes up the spots - Decreasing the scale will make the spots consist of many small irregular spots, while decreasing it will produce blocks of color.

Variation

Spray

Increase this parameter to feather the edges of the spots.

Mix Colors

Enable this option to allow the colors to blend as they overlap.



In this example the Camouflage texture is used as a Diffuse map.

Cellular

The Cellular procedural texture is an advanced tool that can create a wide variety of texture maps. You can create a crumpled texture as shown here, or you can create cracked surfaces, orange peel paint, hammered metal and many more.

Scale

Use this to adjust the scale of the texture to fit your model.

Cell Type

Choose between circular, square or diamond shaped cells.

Bump Height

Use this to control the overall intensity of the texture map

Contrast

Contrast refers the to the difference in the peaks and valleys of the bump map. Control them globally, or expand for finer controls.

Shape 1

Control the fractal shapes generated with this slider. Control them globally, or expand for finer controls.

Levels

Increase or decrease the levels of fractals being generated. Control them globally, or expand for finer controls.

Noise

Use this slider to add noise to the line quality of the fractal shapes



The crumpled effect is created with the Cellular texture applied as a Bump map.

Color Gradient

The Color Gradient Procedural Texture allows you to mix two separate colors on a surface without having to create a custom texture map.

Mapping Tool

Use this to move the center line of the gradient.

Colors

Double click a color slider to select what color will be applied to the color gradient. Use the triangle slider to determine the midpoint of the gradient. To add another color to the gradient, click the  icon. To delete a color, select the color slider to be deleted, and click the  Trash icon.

Location

Adjust this to numerically control the selected color slider.

Gradient Type

Use the dropdown to choose a gradient type that suits your needs.

Scale

Use this to set the scale of the texture.

Angle


Use this to incrementally rotate the texture on the surface in degrees.

Shift

use this to incrementally shift the texture on the surface.

Invert

Reverse the direction of the gradient.

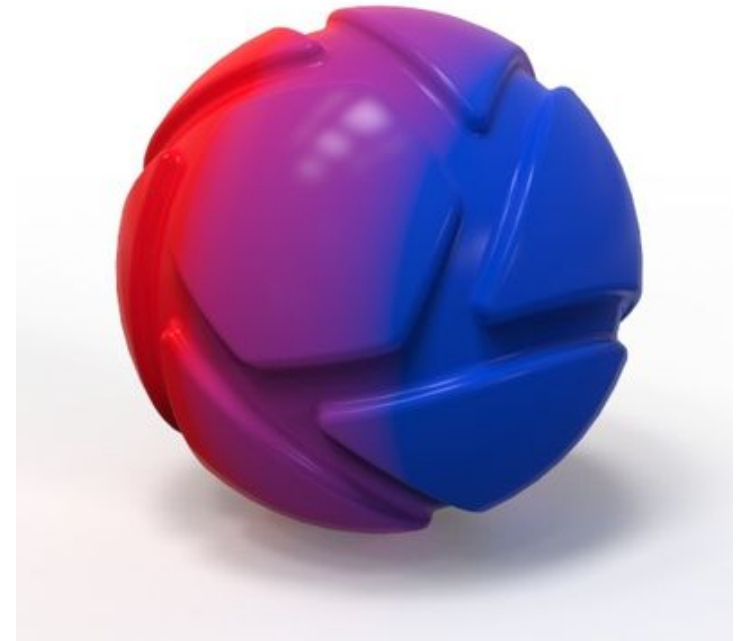

In this example the Color Gradient is used as a Diffuse map.

Curvature

Use the Curvature procedural texture to analyze surface curvature in your model and parts or as opacity maps to create materials with worn edges etc.

Negative Curvature

Choose a color to display when surface curvature is going into the negative direction. The more severe the angle, the closer to the set color the texture will be.

Zero Curvature

Choose a color to display where there is zero curvature. The closer to flat a surface is on the model, the closer color will become to the chosen color.

Positive Curvature

Choose a color to display where the surface curvature is going into the positive direction.

Cutoff

Control the scale of the curvature. Decrease the value to have a smaller range of curvature. Increase to have a larger range of curvature.

Radius

Radius refers to the radius around each point on the surface in which curvature is estimated.

Advanced

Samples

Increase the samples to improve the quality of the gradations. Increasing this parameter also increases render time.

Radius in Pixels

If disabled the radius will be defined in the current scene unit.

Sample Same Material Only

Enable this toggle to use the curvature data from this material only.



In this example the Curvature texture is applied as an opacity map on a metal label on top of a black plastic.

Granite


The Granite procedural texture allows you to simulate the granite texture of a counter top, tile, or stone.

Color

This is the overall color of your granite texture.

Scale

This controls the scale of the grain in the granite.

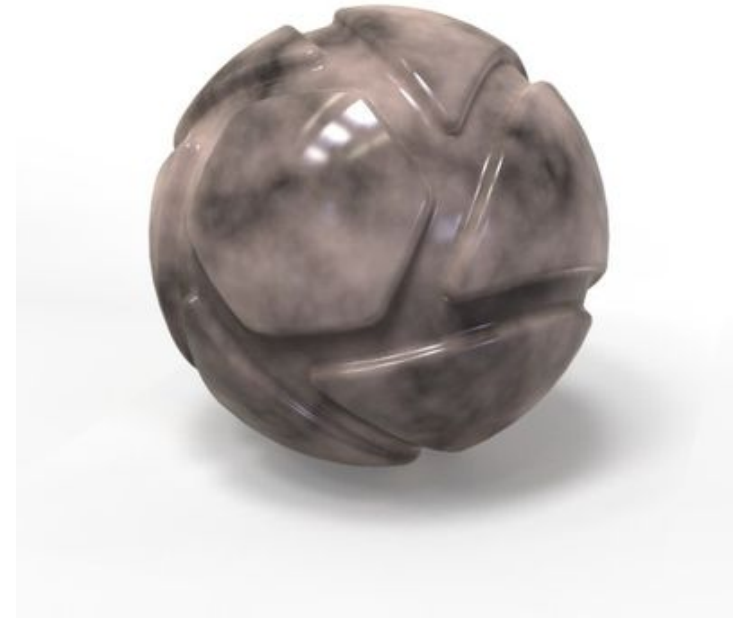

Leather

The Leather procedural texture allows you to easily replicate a leather textured material.

Scale

This controls the scale of the leather grain.

It is highly suggested that you add a synced procedural leather bump to further simulate realistic leather.

Color 1

This is the color of the high points (bumps) in leather. This color should be lighter than color 2, but it should be as close to color 2 as possible for realistic looking leather.

Color 2

This is the color of the low points in leather. This color should be darker than color 1, but it should be as close to color 1 as possible for realistic looking leather.



In this example the Leather texture is applied both a diffuse and Opacity map.

Marble

The Marble procedural texture allows you to simulate the marble material on a counter top, tile, or stone.

Scale

This controls the scale of the veins in your marble texture.

Color

This is the overall color of your marble texture.

Vein Color

This is the color of the veins in the marble texture.

Vein Thickness

This allows you to adjust the thickness of the marble veins.

Vein Noise

This adds random fluctuations to the marble veins.

Vein Noise Scale

This adds fluctuations to the overall direction of the marble veins.



Marble Texture applied as a diffuse map.

Noise (Fractal)

The Noise (Fractal) procedural texture also allows you to simulate ripples and bumps in your material.

Colors 1 and 2

The noise procedural has light and dark colors that you can modify using these two settings.

Scale

This controls the scale of the fractal noise.

Levels

This adds more detail to the fractal noise.

Fall-off

This controls the color balance. Low values accentuate color 2, and high values accentuate color 1.



In this example the Noise texture has been added as a bump map to a glass material.

Noise (Texture)

The Noise (Texture) procedural texture is very similar to the stock noise texture in the textures library, and it allows you to simulate ripples in glass and liquid materials when used as bump.

Colors 1 and 2

The noise procedural has light and dark colors that you can modify using these two settings.

Scale

This controls the scale of the noise.

Magnitude

This increases the intensity of color 2 and the contrast between the two colors.



Occlusion

The Occlusion procedural texture allows for the addition of proximity-based shading on a material. It can be used to accentuate or augment the self shadows cast on a material and along with the Material Graph, create interesting texture effects based on occluded and unoccluded areas.

Occluded

Choose a color that will be used where there are surface near each other. Examples would be a parting line, a fold of skin, or a narrow alley. For more natural results, choose a color that is a darker value of your “Unoccluded” color to create deeper shadows.

Unoccluded

Choose a color that will be used where there is least amount of surfaces near each other. this will most likely be the base color, although there are other creative applications of this procedural texture.

Radius

It is the maximum distance towards any occluding object. If an object is further away it will not be considered in the occlusion computation. This value will control how deep or far the shaded “Occluded” color will reach on the model.

Falloff

This value controls how blended the two color are.

Bias

The bias settings control the intensity of the occlusion on the model.

Normal

This setting adjusts the contrast between the “Unoccluded” and “Occluded” colors on the model

X/Y/Z Bias

These settings increase the intensity of the “Occluded” color in relation the X, Y, and Z directions of your scene.

Advanced

Samples

this setting controls the quality of rendered image.

Sample Same Material Only

Enabling this option will only calculate the occlusion in relation to parts with this material applied, ignoring other parts.

Inside

This will invert the normal values to determine occlusion. this is useful when applying this material on a part that was not modeled with interior surfaces.

Fast

Since the Occlusion procedural texture emulates what is happening with global illumination, you can choose to ignore GI calculations on this material for faster renders.



In this example the Occlusion texture is added as a diffuse map, enhancing shadows of the inside corners with a blue Occluded color

Scratches

Using the procedural Scratches texture is a great way to add weathering and wear to materials, and to metal materials in particular. These are the settings available for the Scratches procedural.

Color

Set the color of the scratches. In cases where the texture is used for opacity maps set this to black.

Background

The color between the scratches.

Scale

Use this to set the overall scale of the scratch pattern generated.

Bump Height

Increase this value to obtain deeper scratches. It can also be set to a negative value to obtain very subtle scratches.

Density

Use this to control the number of scratches generated.

Size

Use this to set the size of the individual scratches. Expand to control the scratch thinness (width) and falloff (fade).

Directional Noise

This controls the randomness of the direction of the scratches. Decrease this value to have scratches in a more aligned direction. Expand to choose Direction Field mapping.

Noise

Controls the straightness of the scratches. Increase the value to have more irregular scratches. Expand to access the Noise Scale slider.

Levels

Controls the number of unique scratches that are generated. Expand to access the level scale.



In this example a layer of paint have been applied (as a label) on a metal material. The Scratches texture is applied as an opacity map on the label revealing the metal under the paint.

Spots

The Spots procedural texture is a an interactive method of creating a texture map of scattered spots on a surface.

Color

Use this to set the color of the spots generated.

Background

Use this to set the color of the background.

Scale

Use this to control the overall scale of the texture map.

Cell type

select if you want circular, square or diamond shaped dots.

Density

Use this to control the number of spots that appear on your surface.

Radius

Use this to change the overall size of the spots generated.

Falloff

Feather the edges of your shapes with this parameter. Higher values produce softer edges.

Distortion

Increase this parameter to randomly warp the shape of the spots.

Distortion Scale

Use this parameter to change the amount of distortion is applied to the spots.

Levels

Increase the amount levels of sizes that appears.

Levels Scale

This changes the difference in sizes between the various levels. Increase the value to greater than one to decrease the smallest spot size. Decrease the value to less than one to increase the largest spot size.

Intensity Modifier

Increase this parameter to have the spots decrease in opacity as they decrease in size.

Advanced

Invert

Enable this option to have the spots feather in to the outside color, creating rings or bubble like silhouettes.



In this example the Spot texture is applied both as a Diffuse map and as an Opacity map.

Vertex Color

The Vertex Color texture is used only with geometry imported from other 3D applications that supports vertex color texture maps, such as ZBrush. Only use this texture if you are importing from a compatible 3D application, as it will have no affect otherwise.

Default color

controls the background color that is used for the alpha channel from an imported vertex texture.

Multiplier

Blend a color with the imported vertex color texture.

Volume Map

The volume map texture enables you to use OpenVDB files for you textures. It is primarily used as a density texture with [Scattering Medium](#).

File

Browse for the texture file. Only .vdb files can be used af volume maps.

Center on

This enables you to quickly position the texture to the center of either the model or the part. For finer adjustment of the position use the *Move Texture* tool.

Move texture

This enables you to move the texture - see the [Move Texture](#) page for details

Scale

Adjust the size of the texture with the slider. The scale is measured in the current scene units.

Fit to part

Scales the texture to fit the part.



This example shows a cube with a scattering medium material and a volume map as a density texture.

Wood

The Wood procedural texture allows you to customize the look of your wood materials. Most often, you will want to start out with the plastic material type and change the specular color to white.

General Settings

Scale

Use this to increase size of the grain. For best results, keep the scale small.

Angle

See description of angle on the [Move Texture](#) page.

Color 1

This sets the base color of the wood.

Color 2

This sets the color of the wood rings.

Ring Width

This adjusts the thickness of the wood rings.

Variation

Ring Noise

This adds random fluctuations in each ring.

Axial Noise

This adds fluctuations or waviness of the overall direction of the grain.

Color Noise

This creates random thick and thin areas to give a more organic look to the wood ring.



In this example the wood texture is added both as diffuse map and bump map.

Wood (Advanced)

The Wood (Advanced) procedural texture gives finer control than the basic wood procedural texture, and creates more realism in the map.

Scale

Use this to control the overall scale of the texture map.

Angle

See description of angle on the [Move Texture](#) page.

Winter/Spring/Summer/Fall

New wood formed in a tree during spring and summer is light in color. Toward the end of a growing season, new cells formed are smaller and have darker, thicker walls. Choose the color swatches to accurately color the rings in accordance with the seasons.

Ring Width

This adjusts the thickness of the wood ring.

Ring Width Variation

This enables you to add variation to the width of the wood rings.

Variation

Ring Spacing Variation

This parameter controls the contrast of thick and thin ring shapes to represent different rates of annual growth.

Ring Noise

This adds fluctuations or waviness to the rings.

Axial Noise

Increase this parameter to add variations to the circular shapes of the rings.

Color Noise

Increase this parameter to add more splotches of color in the rings.

Seasonal Color Noise

Add variation to each color swatch as it blends from each color.

Knots

Knot Color/Border

The knot color is blended into the main colors of the texture. Choose a grey value to darken the knots. The knot border should be darker than any of the other colors.

Knot Density

This parameter controls how many knots appear in the texture.

Knot Age

Increase this parameter to increase the number of rings that appear in the knots.

Knot Border Size

This parameter changes the thickness of the knot borders.



In this example the Wood (advanced) texture has been used both as diffuse map and bump map. This material is from the KeyShot library - Oak wood satin - only the size of rings and knots have been adjusted, to match the model.

Knot Distortion

Use this to control the fluctuations and add irregularities in the knot shape.

Branch Scale

Control the overall size of the knots with this parameter.

Grain**Grain Color Bleed**

This parameter controls the amount of color each ring blends into the rings on either side. Decrease to have very clearly defined rings or increase to give the rings a more blended appearance.

Axial Graininess

Increase this parameter to blur the texture.

Ring Graininess

This adjusts the thickness of the wood rings.

Grain Scale

This adjust the size of the grain striations between the rings.

Grain Thinness


Control the size of the grain striations with this parameter.

Advanced**Seed**

Scrub through this parameter to add randomness to all of the previous parameters to create a more natural look.

Map Types

KeyShot has four primary Map Types along with a number of material and texture settings that can also accept textures.

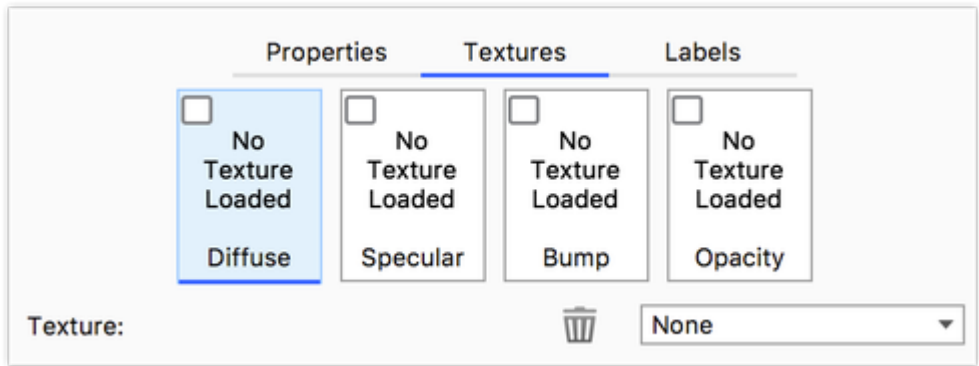

Map Types
- Primary Map types - Diffuse - Specular - Bump - Opacity

Each [Material Type](#) uses texture map types depending on the material type and settings. You will see the available map types in the *Project* window, *Material*, *Textures* tab.

The Primary Map types are not the only texture maps you will encounter - Anywhere you find the  in the material properties you will be able to add a texture to the property. Texture icon. Apply a texture by drag and drop from the library, right-click to select a type or click to load a texture from a file. When a property has a texture applied you can click it to adjust.

Primary Map types

Diffuse

The *Diffuse* (also seen as *Color* or *Transmission*) map type allows an Image texture or 2D/3D procedural texture to be applied to replace the basic solid Diffuse/Color/Transmission setting.

This map type provides full color information and will show transparency when a PNG with alpha transparency is used.



Plastic with a texture map applied as a diffuse texture.

Specular

The *Specular* map type can use black and white values to indicate areas that have varying levels of specular intensity. Black will indicate areas of 0% specular reflectivity, whereas white will indicate areas of 100% specular reflectivity.

Notice on the example that while the material in it self is emitting specular reflections, the dots are not.



The plastic material uses the same mesh as both specular and bump map.

Bump

The *Bump* map type is used to create fine details in materials that would be unrealistic to include in the model, like the brushed metal in the example. Bump uses the texture to simulate deformation of the surface.

There are two methods of applying bump maps. The first and easiest is using a black and white image. The second way is by using a *Normal map*.

Black and White Image

When using a black and white image for a bump map, the black values are interpreted as lower and the white values are interpreted as raised.

Normal Maps

Normal maps contain more colors than the standard black and white bump maps. These additional colors represent different levels of distortion on X, Y and Z coordinates. This can create more complex bump effects than a black and white bump map which represents only two dimensions. However, most bump effects can look very realistic without the need for normal maps. Enable this setting when a Bump map is selected by checking *Normal Map*.

Bump Height

With Bump maps, *Bump Height* controls the effect of the map. Increasing this raises the peaks of the bumps, and helps exaggerate the bump when the texture needs to be more visible.

Opacity

The *Opacity* map type can use black and white values or alpha channels to make areas of a material transparent. This is useful for creating materials like the mesh material shown, without actually modeling the holes.

Opacity Mode

The opacity mode can be set to three different methods:

- **Alpha**
This will use any alpha channel that is embedded in the image to create the transparency. If no alpha channel is present, no transparency will be shown.
- **Color**
This will interpret black areas as completely transparent and white areas as completely opaque. 50% gray will be 50% transparent. This method is available to avoid the need for alpha channels.
- **Inverse Color**
Inverse color is the opposite of color. White will be completely transparent, black will be completely opaque and 50% gray will be 50% transparent.



Anodized metal with brushed bump texture.



Mesh material created with opacity map

Tip

You can easily drag and drop textures from one Map Type to another.(e.g. from Bump to Specular) by simply holding *Ctrl* (Windows) or *Command* (OS X) and dragging the texture to another Map Type. To Copy a texture press *Alt* while dragging the texture from one map type to another.

Mapping Types

Image Textures and 2D Textures allow you to take 2D images and place them onto 3D objects. How they are applied will affect how they appear. KeyShot provides seven different mapping types for these types of textures. When an Image Texture or 2D Texture is active, you will see a Mapping Type option with the following mapping types.

Planar

The *Planar* mapping type will project a texture on the X, Y or Z axis. The orientation is set in the Interactive *Move Texture* tool. Surfaces of 3D models that are not oriented on the chosen axis will show stretching of the texture in the other two axes.

Box

The *Box* mapping type will project a texture from six sides of a cube in towards a 3D model. A texture will be projected from a side of the cube until stretching occurs, then the next best projection side will take over. Box mapping is a quick and easy solution that will work in most cases because there will be minimal stretching of textures.

Cylinder

The *Cylinder* mapping type will project a texture inwards from a cylinder. The texture will project the best on surfaces that are facing the inside of the cylinder. The texture on surfaces that do not face the inner walls of the cylinder will stretch inwards.

Sphere

The *Sphere* mapping type will project a texture inwards from a sphere. The texture will resemble the original image the most at the equator. The texture will start to converge as it reaches the poles of the sphere. As with box mapping, stretching is less of an issue when working on multi sided objects than it is with any of the planar mapping modes.

UV

The *UV* mapping type is a completely different method of applying 2D textures to 3D models. Using 3D applications such as 3D Studio Max or Maya, you can design how the texture map is applied to each surface. It is more time consuming and is much more widely used in the entertainment industry as opposed to the design/engineering world.

Camera


The *Camera* mapping type will keep the texture oriented with respect to the camera. This will provide a consistent texture appearance on the surface regardless of the position of the camera.

Node



The *Node* mapping type allows you to drive a texture with a UV mapped procedural. An example of this can be seen below.

On this page


- Planar
- Box
- Cylinder
- Sphere
- UV
- Camera
- Node

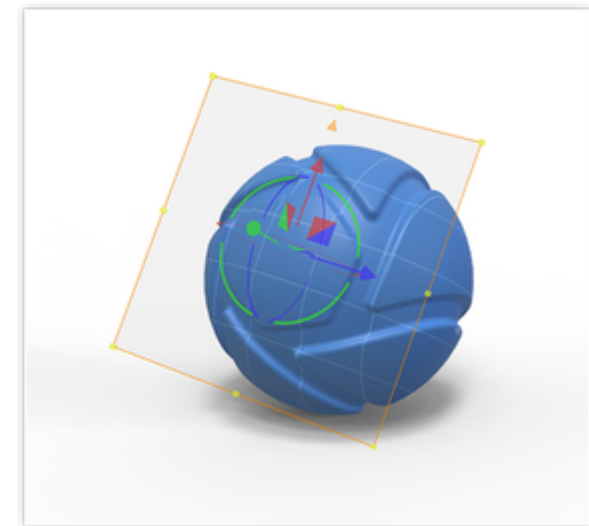

Planar Map as shown in the Move Texture tool.

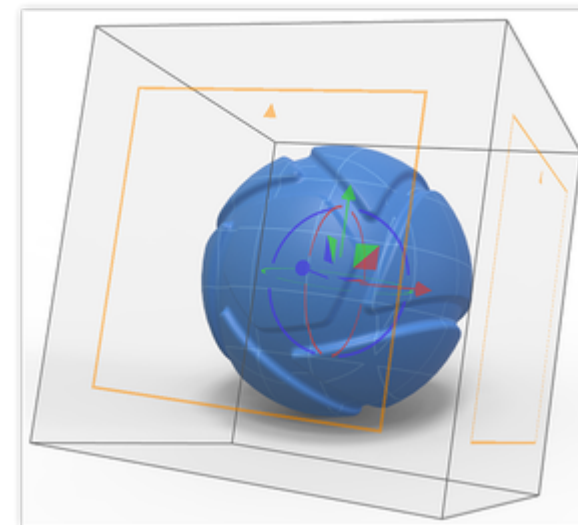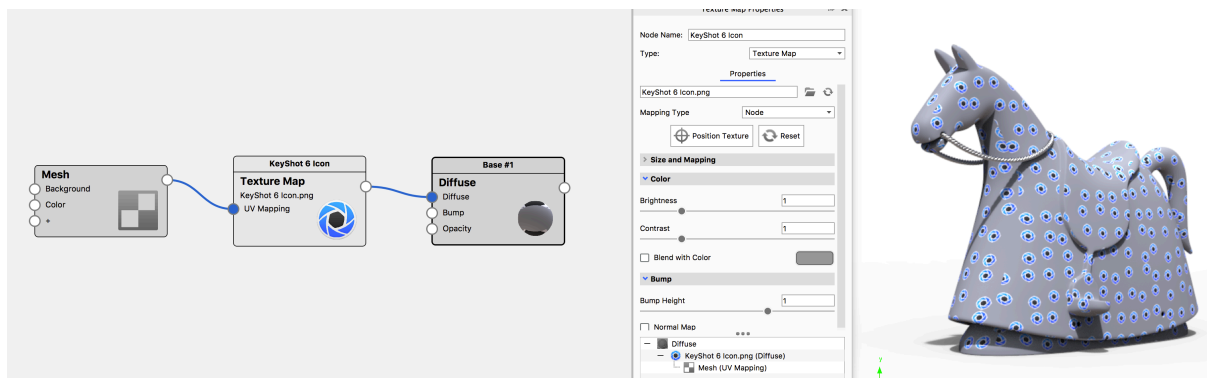

Box Map as shown in the Move Texture Tool.

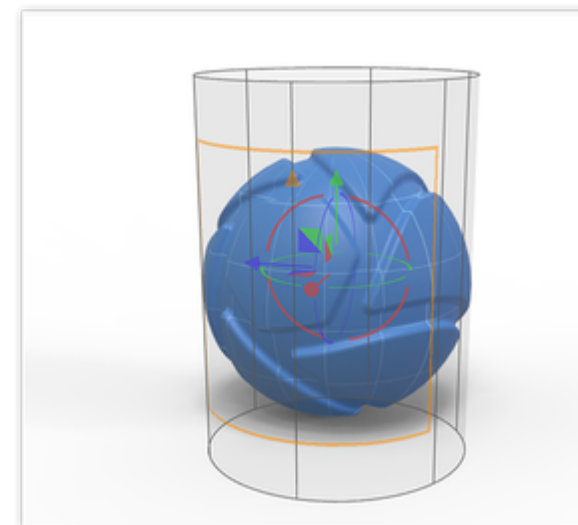

Cylinder Map as shown in the Move Texture Tool.

Move Texture

Move Tool

Fine tune the position of textures mapped to your model with the texture move tool. The tool is accessed from the texture tab within the material editing menu, and it is available when in Planar, Box, Cylindrical and Spherical mapping modes.

Position

Use this to establish exactly where you want the center of your texture image to project. Once in position mode, you can simply click on the surface of the model to change the where your texture is projecting.

Translate

Use arrow handles to move the texture mapping position on the XYZ axes. To translate the mapping, click on any of the three axis arrows. The red, green and blue arrows correspond to the X, Y and Z axes.

Rotate

Use circle handles to rotate and align the texture mapping to your model. Hold SHIFT to constrain the rotation to 15 degree increments.

Axis

Select if the translation/rotation should use the global or the local axis.

Fit

Fit the texture to match geometry on the X,Y, Z axis.

Center on

- **Model** - This will position the texture relative to the model.
- **Part** - This will position the texture relative to the part.

Cancel or Confirm Changes

After adjusting the texture mapping with the mapping tool, click the green check mark to confirm the changes and close the mapping tool. Click the red X to cancel the changes and close the mapping tool.

Tip

Enable the  sync option in the Size and Mapping section to move all your textures on the current material concurrently.

Size and mapping

Size and Mapping lets you scale and adjust the orientation of the texture. The parameters vary a little with the [Texture Types](#) and [Mapping Types](#) but the overall options are the same.

Use DPI for size


This lets you set the size of the texture in DPI instead of defining width and height.

Width and Height

Sets the width and height of the texture using the current scene unit.

On this page

- [Move Tool](#)
- [Size and mapping](#)

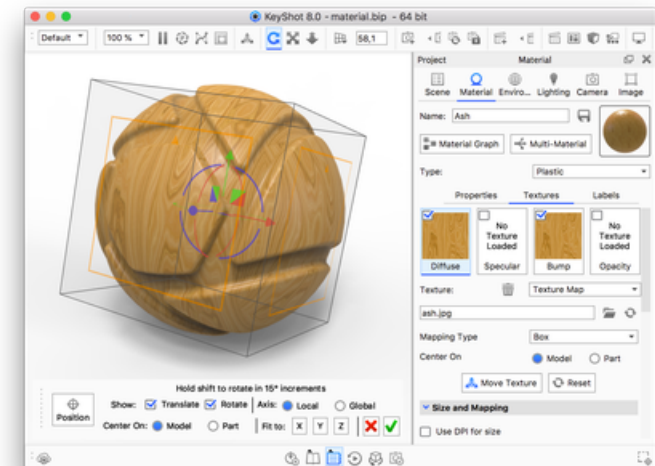

Move texture tool. The Orange squares on the faces of the box are representing the UV coordinates, which can be controlled in the Size and Mapping section.



Lock Aspect - Will secure a uniform scale of the texture.



Refresh - Will reset to the original aspect ratio of the texture.

Shift U

Moves the texture in the U direction. On the example to the right, the UV plane is shown with the orange box, where the V direction is shown with the small arrow. - this means that in the example Shift U will move the texture sideways.

Shift V

Moves the texture in the V direction. In the example to the right Shift V will move the texture up/down.


Angle UV

This will rotate the UV plane (the orange squares in the example to the right) of the Map

Angle

This will rotate the entire map around the local Y axis. This is the same as rotation in the Move Texture tool and means that the entire box will be rotated around the green axis in the example to the right.

Expand the setting for even more precise control.

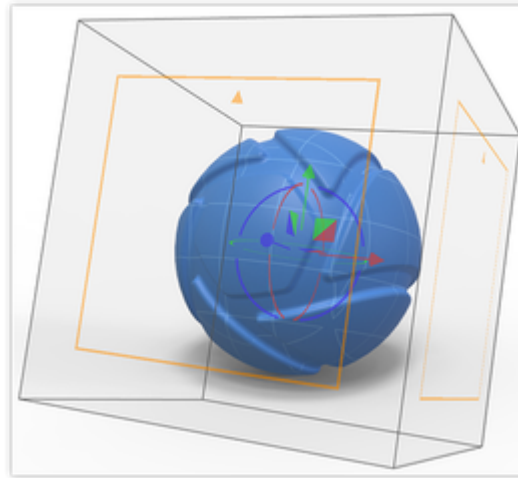

Axis Tilt

This will tilt the local axes around the Global X axis.

Axis Azimuth

This will rotate the map around the global Y axis

If the tilt is 0 adjusting the azimuth will be the same as adjusting the overall angle.

Center X

Will move the center of the map along the global X axis.

Center Y

Will move the center of the map along the global Y axis.

Center Z

Will move the center of the map along the global Z axis.



Flip Horizontal

Will mirror the texture over the local Y axis.



Flip Vertical

Will mirror the texture over the local X axis.



Two Sided

This is only relevant for Planar and Box Mapping and has slightly different behavior for the two.

- Planar: When enabled the texture will be visible on both sides of the model, with a mirrored version on the "backside".
- Box: when enabled the texture will be mirrored on the back faces of the box, when disabled the texture is the same on

all faces.



Repeat Horizontal

When enabled the texture will be tiled horizontally.



Repeat Vertical

When enabled the texture will be tiled vertically.



Sync

Textures on this material node with sync enabled will be scaled/moved/adjusted concurrently.

Labels

Labels are designed for easy placement of logos, stickers or video that need to be placed freely onto a 3D model. You can also use Labels to create a layered appearance with another material on top of the main material.

Essentially labels are layers with materials/textures on top of your material.



*In this example the material ball has 3 labels - 2 individually positioned "stickers" and a coat of paint with subtle scratches revealing the golden base material.
To make sure the scratches cut both the sticker and the paint, the same opacity map is used on both.*

On this page	
1. Layer List	- Add Label - Delete Label - Layer order - Pick Label
2. Label Type	
3. Label Properties	
4. Label Textures	- Map Types - Mapping Type - Move Texture - Texture Properties

Labels are added through the labels tab in a material's properties or via drag and drop from the Library, either onto a part in the Real-Time View or into the Layer list.

1. Layer List

An unlimited number of labels can be added to a material. Each label can have its own mapping type. If an image has an alpha channel embedded, it will be retained and areas of transparency will not show.



Labels are added by clicking the “+” Icon and selecting *Add Label (Texture)*, *Add Label (Video)* or *Add Material*. Once added, the label name will be displayed in the list. You can also choose “Duplicate” to create copies of existing labels.

Add Material will simply add a layer of the material selected in Label type (2) on top of your base material, while *Add Label (Texture)* and *Add Label (Video)* also will add a texture to the Diffuse map (4).



Labels can be deleted by selecting the label in the list and clicking the Trash Icon



Labels will be layered as they are added. If labels overlap on the model, they will stack in the same order as ordered in the Labels list. The label order can be shifted by pressing the up and down arrow buttons.



Lets you pick a label in the Real-Time View for editing

2. Label Type

Each label will be assigned a material type. The default material applied to a label is plastic, but it can be changed to [Diffuse](#), [Flat](#), [Metal](#), [Paint](#), [Translucent](#), [Advanced](#), [Anisotropic](#), [Metallic Paint](#), [Plastic \(Transparent\)](#), [Translucent \(Advanced\)](#), [Emissive](#), [Toon](#), and [Xray](#).

3. Label Properties

The Properties Tab will show the contextual settings for the label type selected. See the [Material Types](#) for more.


4. Label Textures

Map Types

Texture and video Labels will be added as Diffuse maps. In the *Label Textures* tab you can add other maps to your label similarly to the *Textures* tab for Materials. The type of texture maps available to a label type will be similar to the type of textures available to the material type.

Use the check-boxes in the list of texture types to enable or disable a texture map.

See the [Map Types](#) page for details about Bump, Diffuse, Opacity maps etc.

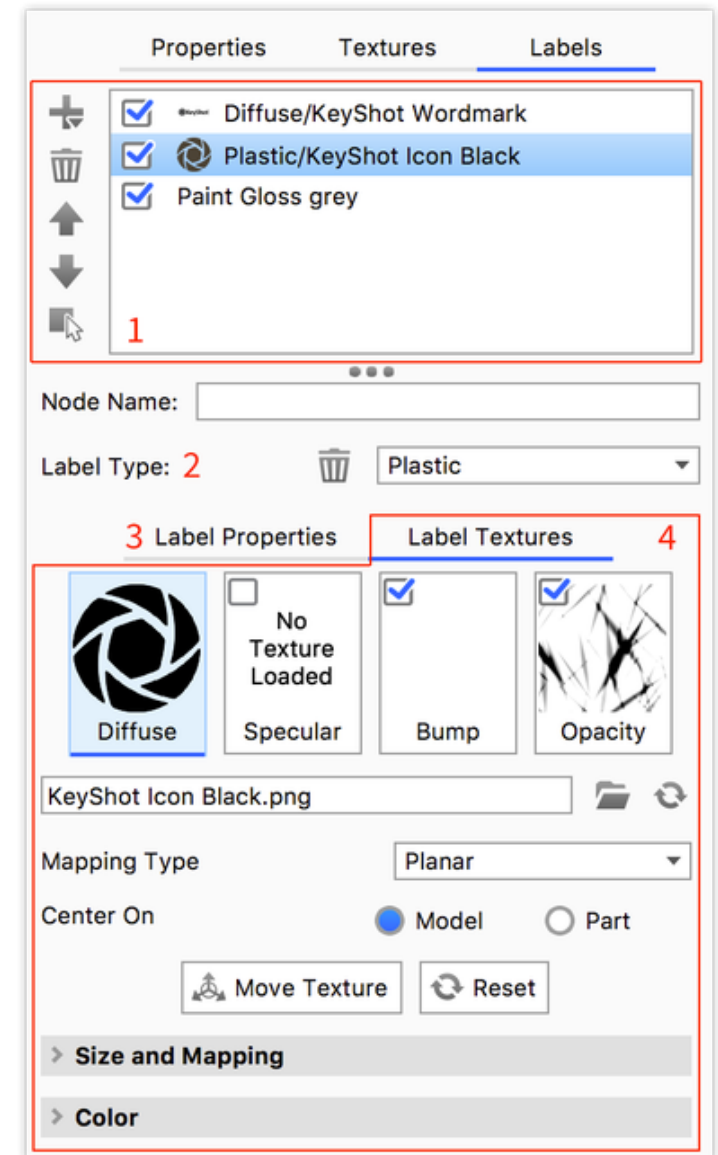

Mapping Type

The Textures are by default planar - see the [Mapping Types](#) section for more information about the different Mapping methods

Move Texture

See the [Move Texture](#) page for details about *Move Texture* and *Size and Mapping*.

Drag and Drop

You can add your label by drag-and-drop onto the model. This will add and align the label to the point on the model where you dropped it. This may insert it at a different angle in the Label properties than what you expect.

If you drop your label into the Labels list, it will be inserted at 0 degrees (or 90 degrees depending on how the model was imported).

Keep Label Size

If you would like to use the dimensions of the label stored in the file for the initial label size, use a Photoshop .PSD file. When you import your label as a .PSD, KeyShot will check the DPI settings and set the DPI value to that stored in the .PSD file.

Texture Properties

See the [Texture Types](#) section for details on the properties of individual texture types.

Environments

The primary method of lighting a scene in KeyShot is through Environment Lighting. Environment Lighting uses spherical High-dynamic-range imaging (HDRI) to represent the full, physically accurate lighting of an interior or exterior space.

Environment Presets

KeyShot comes with many environment lighting presets to get you on your way fast. Access all environment preset from the *Library* window, *Environments* tab. Additional environments may be accessed on [KeyShot Cloud](#).

Environment Tab

The *Environment* tab is where you control all the settings for your environment lighting. Access the settings from the *Project* window, *Environment* tab.

HDRI Editor

KeyShot Pro users will see the HDRI Editor button on the Environment tab directly beneath the HDRI preview.

In this section

- [Adding Environments](#)
- [Adjusting Environments](#)
- [HDRI Editor](#)

Adding Environments

KeyShot is designed to provide real-world lighting right out of the box. Through environment presets and the ability to modify them or create your own, your scene can be lit just the way you need with everything visible in real-time.

You can find environment presets in the *Environment Library* or *KeyShot Cloud Library*.

Environment List

The *Environment* tab of the *Project* window includes the ability to save different Environments and their settings to a list for fast access and navigation.

When a new scene is opened the Environment List is populated with the environment used in the Default Startup Scene specified in the General Preferences. All changes made to the settings will be recorded and saved with that environment.

Adding an Environment

You can add environments in the following ways:

- drag and drop from the *Environment Library/KeyShot Cloud Library* onto the *Real-time View* - this replaces the current environment.
- double click an environment in the *Environment Library* - this replaces the current environment
- drag and drop from the *Environment Library/KeyShot Cloud Library* onto the *Real-time View* while pressing *ALT* - this adds a new environment in the *Environment List*.
- drag and drop from the *Environment Library* onto the *Environment List* - this adds a new environment in the *Environment List*

Creating a New Environment

To create a new Environment based your current settings, click the *Add Environment* icon  at the top left of the pane.

On this page

- [Environment List](#)
- [Adding an Environment](#)
- [Creating a New Environment](#)

Adjusting Environments

KeyShot allows you to adjust your HDRI lighting through a set of easily adjustable *Settings* found in the *Project* window, *Environment* tab.

File

Load a lighting environment from a file (.hdr, .hdz, .exr). Select the  icon to open a new environment. Select the  icon to reload the current environment. Hovering over the file name will display the file path. Right-click to display options to *Copy Path*, *Show in Explorer*, *Reload* or *Open* a new environment file.

Adjustments

- **Brightness** brightens or darkens the entire HDRI from the shadows to the highlights equally.
- **Contrast** increases the separation between dark and bright areas, making shadows darker and highlights lighter.

Transform

- **Size** determines the size of the environment.
- **Height** sets the vertical position of the environment in relation to the ground plane.
- **Rotation** allows you to rotate the environment.

Background

- **Lighting Environment** uses the image of the lighting environment as background in the scene.
- **Color** allows you choose a solid color for the background.
- **Backplate Image** allows you add and use an image as the background for the scene. Supported file formats include .jpg, .jpeg, .tif, .tiff, .bmp, .png, .gif, .dds, .hdr, .hdz, .exr, .tga, .ppm, .ktx, .psd.

Note

The background Color may also be set to a solid color through the *Photographic Image Style*, this will override any settings applied in the Environment tab.

Ground

- **Ground Shadows** is an option to change the visibility of ground shadows and allows you to set the base color.
- **Occlusion Ground Shadows** is an option to see occlusion shadows in place of drop shadows.
- **Ground Reflections** is an option to change the visibility of ground reflections.
- **Flatten Ground** will project the part of the environment that is below the ground onto the ground plane, correlating height and width if the lighting environment is visible as the background in the scene.
- **Ground size** allows you to set the size of the virtual ground plane and only effects the ground shadows.

On this page

- [File](#)
- [Adjustments](#)
- [Transform](#)
- [Background](#)
- [Ground](#)

HDRI Editor

The KeyShot *HDRI Editor* (Pro Only) is a simple way to make adjustments to lighting environments or create your own.

The *HDRI Editor* provides a unique system of adjustable light, image and gradient *Pins* to light your scene.

HDRI Editor Overview

The KeyShot HDRI Editor is fully integrated into the *Environment* tab located in the *Project* window.

All *Pins* and settings for *Color*, *Adjustments* and *Transforms* are embedded in the KeyShot file eliminating the need to save an individual .HDZ for each custom Environment you create. This provides a huge convenience and asset management benefit while greatly reducing the amount of data necessary to store locally and in KeyShot .KSP files.

The HDRI Editor has flexible features including:

- Export of HDR/EXR
- Gradient Background
- Draggable interactive Sun & Sky
- Sun & Sky Ground Color
- Sun Size parameter
- Rectangular Pin Rounded Corners
- Gradient Pins
- Image Pin Color Adjustments
- Extract pins from previous version HDZ files
- Pop out HDRI Editor canvas

In this section

- [HDRI Editor Pins](#)
- [HDRI Editor Background](#)
- [Adjusting Legacy \(KeyShot 6 and earlier\) HDRI Environments](#)

HDRI Editor Pins

Pins are light sources that can be placed into the HDRI to further enhance the image file, and give the desired lighting effect on the object scene.

Pin List

Contains all the pins created in the HDRI editor. You can enable or disable a pin by clicking the checkbox to the left of its name. You can rename a pin by double clicking its name. Right click pins for options to delete or duplicate. The active pin being edited will be highlighted blue in the list and will be marked by a blue dot in the preview.

Pin Options

Add Pin

To Add a pin click one of the options above the *Pin List*, these include *Add Pin*, *Add Gradient Pin*, *Add Image Pin*, and *Add Copy Pin*. The Pin types will be described later on this page.

The new pin will be displayed in the *Pin List* as well as the preview window. To make a pin active for editing, select it in the *Pin List* or click on the pin handle in the preview window. Drag the pins by their handles to position them. The “Add Highlight”-pin is explained below in the “Set Highlight” section.



Delete Pin

Click on the trash can icon to delete the active pin.



Move Pin Up/Down

Click on the arrows to change the pin order in the pin list. The order is important as it will display and layer pins from the top down.



Pin Folders

Use pin folders to organize all your pins in your HDRI. Click on the “Add Folder” icon to add a folder to the list and drag pins into the folder.



Set Highlight

With the *Set Highlight* option you can create your pin by selecting a region on the model you want to highlight. Simply CTRL+Click/CMD+Click in the Real Time View anywhere on the surface of the model and a pin will be generated facing that point on the surface. When finished, click “Done.” Pins added this way can be edited as normal.

To set an existing highlight click onto “Set Highlight”, and then select an existing pin in the editor. Click on the object to set the highlight using the selected pin, and use your left mouse button to drag it into the right position.

Pin Types Explained



Standard Pin

Add Pin creates a pin in the center of the unfolded HDRI. Grab it to place it in the desired location. Use the controls explained in section *Adjusting Pins* to get achieve the desired effect.




Gradient Pin

A Gradient Pin allows you to place a light source with color and opacity variations.

On this page

- [Pin List](#)
- [Pin Options](#)
- [Pin Types Explained](#)
- [Adjusting Pins](#)
- [Editor Options](#)

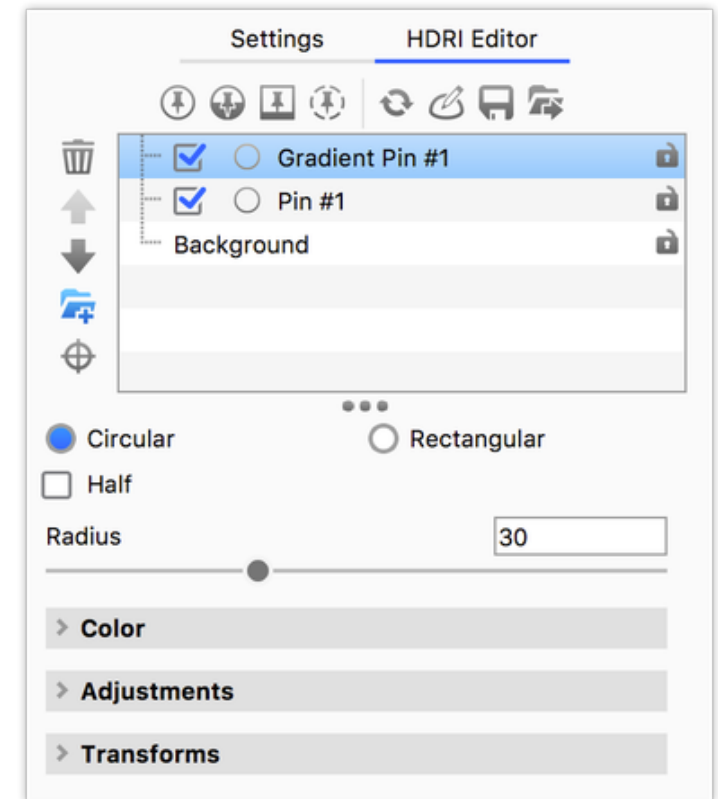



Copy Pin

When this options is selected, a snapshot of a section of the background is used as a new pin. A pin handle and a marker of the copy-origin (yellow dot) will appear on the preview window.

After creating the copy pin, move the pin by the handle to place it where desired. Adjustment sliders similar to those used with the regular pin will be available with the same effects.

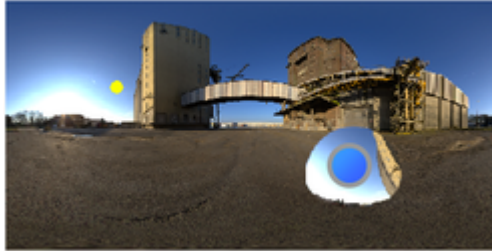


Image Pin

The image pin allows you to use HDR, HDZ, EXR, JPG, PNG, JPEG, and BMP as a pin. There are limitless usages for this pin, such as creating specific reflections, simulating a lighting array and using part of an HDR with another HDR among others.

When adding an image pin, you will prompted to select an image to be used. Once selected, the image will be placed in the preview window.

Adjustment sliders will be available to edit the image pin. These sliders are similar to the regular pin sliders.

Adjusting Pins

Circular/Rectangular

This will toggle the shape of the pin. This is crucial when creating very specific shapes and reflections in your renderings.

Half

For either pin shape you can select the shape to be cut in half. This will cut the pin in half. All adjustments will work the same except that you are now only seeing half of the pin.

Radius (Circular)

This determines the pin size of circular pins.

Width/Height/Angle (Rectangular)

This determines the shape and size of rectangular pins.

Color

Use this to set what color the pin will project. For accurate real-world lighting, use the Kelvin scale.

Blend Mode

With this option, choose different ways to have the pins blend and interact with each other. Pin order becomes very important with this function.

Falloff Mode

This controls the falloff of the light from the center of the pin. Different modes have different behaviors. You can see the effect of the various modes both in the editor as well as in the KeyShot Real-Time View.

Falloff

This controls the softness of edge of the pin light. Increase the falloff for more blended, softer edges.

Brightness

Use this to adjust the overall intensity of the pin light.

Editor Options



Generate Full Resolution HDRI

While you are editing the pins the environment is using a "fast preview" mode, where you don't see the full effect of the changes- click  to force the environment to be displayed in the full resolution.



HDRI Editor Canvas

This will launch the HDRI editor, where you can edit the pins on a bigger canvas.



Save Environment

Here you can save your environment to the Library.



Export Environment

This enables you to export a .HDR/.EXR/.HDZ with your environment.


HDRI Editor Background

When you select the *Background* item in the *HDRI Editor Pin List* you have four options for your HDRI Editor Background: *Color*, *Gradient*, *Sun & Sky* and *Image*.

Resolution

The *Image* background is automatically set to the resolution of the selected image. But for the other 3 types you will have to set the *Resolution*.

Overall a smaller resolution gives better performance, but a larger resolution gives better shadow and reflection quality. Normally it the default value will suffice. But if you are operating with highly reflective materials and half/square pins or pins with little/no falloff, you may need to increase the resolution.

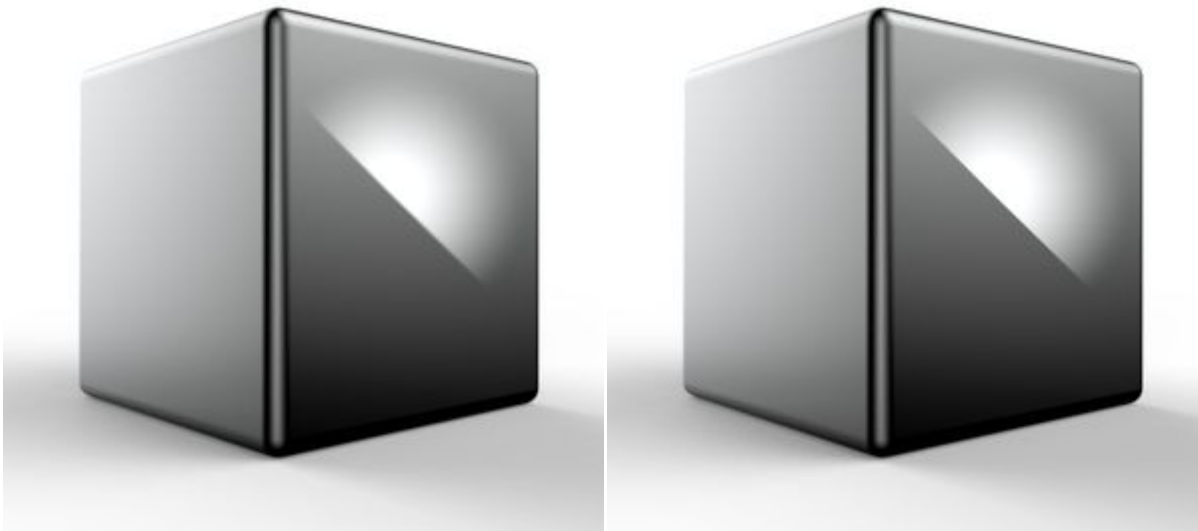

In the example on the left the environment resolution is low. Notice that the edge of the highlight is not as sharp as in the example to the right, where the environment has a high resolution.

Color

Color

Select a solid color as background for your environment. This should not be confused with the setting of a solid background color (can be set in [Environment settings](#) or [Photographic Image style](#)) as it will affect the lighting in the scene.

Brightness

Adjust the brightness of the background color.

Gradient

On this page

- [Resolution](#)
- [Color](#)
- [Gradient](#)
- [Sun & Sky](#)
 - [Color](#)
 - [Transform](#)
- [Image](#)
 - [Color](#)
 - [Transform](#)

Color bar

Here you can set when and what colors will fade from one to the the next. Click on the dropper circle to select a color stop, then use the color swatch to choose a color.

The little triangles shows where the 2 colors are mixed 50-50 and they can be dragged to control the course of the blend.



Add Color Stop

If you would like to fade between more than 2 colors, click on the Add stop button below the color bar to create another color swatch. click and drag the color pins and the gradient apex slider to your desired animation effect.



Delete Stop

If you want to remove a color stop, just select it and click delete.

Stop Brightness

Select a color stop and adjust the brightness.

Latitude

Select a color stop and adjust the position of the color on the gradient. This can also be achieved by dragging the color stops on the color bar.

Brightness

Adjust the brightness of the whole gradient background.

Saturation

Adjust the saturation of the whole gradient background.

Sun & Sky

Resolution

Here, set the resolution of the sun and sky that will be generated. A smaller resolution has better performance, but a larger resolution has better shadow and reflection quality.

Location

Here, you can choose a preset city that is closest to where the scene is taking place for accurate portrayal of the sun and seasons at location.

Coordinates

Another option is to choose "Custom Location" and enter the geo coordinates of a location.

Date

Use this to set the date to the day the scene will be taking place for accurate portrayal of color temperatures of the seasons.

Custom Sun Position

Time

Use this to set the time the scene takes place for correct placement of the sun.

Turbidity

Increase this setting to add more haze to the sky. This will tint the sky with a warm tone and filter the sunlight that is cast in the scene.

Sun Size

Adjust the size of the sun.

Ground Color

Set the color of the ground on the background.

Color**Brightness**

Adjust the brightness of the Sun & Sky background.

Contrast

Adjust the contrast of the environment

Saturation

Adjust the saturation of the environment

Hue

Adjust the hue of the environment

Colorize

Add a color that the environment will be blended with.

Blur

Adjust the blur of the environment background, increase to soften contours.

Transform**Tilt**

This will tilt the vertical axis of the environment.

Rotation

Rotate the environment background without affecting any pins in the environment. If you want to rotate the entire environment you can do it in the [Environment settings](#).

Image**Resolution**

This is set by the image size. If you experience bad reflections with the environment you may need to use an image with a higher resolution.

Image

Select an image file for the environment background.



browse for another image file



Refresh the image file



Remove the image file - this will change the environment type to *Color*.

Color**Brightness**

Adjust the brightness of the Sun & Sky background.

Contrast

Adjust the contrast of the environment

Saturation

Adjust the saturation of the environment

Hue

Adjust the hue of the environment

Colorize

Add a color that the environment will be blended with.

Blur

Adjust the blur of the environment background, increase to soften contours.

Transform**Tilt**

This will tilt the vertical axis of the environment.

Rotation

Rotate the environment background without affecting any pins in the environment. If you want to rotate the entire environment you can do it in the [Environment settings](#).

Adjusting Legacy (KeyShot 6 and earlier) HDRI Environments

Handling of environments and environment lights (pins) changed with KeyShot 7. To adjust environments created prior to KeyShot 7 you will need to extract the image pins and/or background images to take advantage of the new, more efficient, handling of environments and pins.

You can convert HDRI environments from KeyShot 6 and earlier to KeyShot 8 by clicking the *Extract HDZ* icon  located just above the pin list in the HDRI Editor tab. When you click *Extract HDZ* you may be prompted to save any images present in the HDZ file to your hard drive.

Note: If there are no image pins and the background is uniform, no files will be written out.

Lighting

The lighting in your scene comes from the [Environment](#) and/or from [Light Source Materials](#). In the *Lighting* tab of the *Project panel* you can control the interpretation of light in your scene.

Environment Lighting

The primary method of lighting a scene in KeyShot is through Environment Lighting. Environment Lighting uses spherical High-dynamic-range imaging (HDRi) to represent the full, physically accurate lighting of an interior or exterior space. See the [Environments](#) section for more details.

Light Source Materials

Any piece of geometry can be turned it into a local light source. It's a completely different approach from traditional rendering applications allowing more flexibility for rendering light accurately in your scene.

There are four [Light Source Material Types](#) that provide different lighting capabilities:

Area Light Diffuse

Turn any object into an array of light. View and adjust the position in the real-time window. Control the intensity of the light using Watts or Lumens.
See the [Area Light](#) page for more details.

Point Light Diffuse

Turn any object into a point light. View and adjust the position in the real-time window. Control the intensity either using Power Watts or Lumens.
See the [Point Light](#) page for more details.

Point Light IES Profile

Load an IES profile by clicking on the folder icon in the editor and see the shape of the IES profile load in the material preview and in the form of a mesh in the real-time window.
See the [IES Light](#) page for more details.

Spotlight

Turn any object into a spotlight. View and adjust the position in the real-time window. Control the intensity either using Watts or Lumens.
See the [Spotlight](#) page for more details.

Adding A Light

On this page

- Environment Lighting
- Light Source Materials
 - Area Light Diffuse
 - Point Light Diffuse
 - Point Light IES Profile
 - Spotlight
- Adding A Light
- Moving a Light
- Animating a Light
- Interpretation of light
 - Performance
 - Basic
 - Product
 - Interior
 - Jewelry

A light source may be applied to any model you like. A light can be applied to imported geometry, existing geometry or to geometry available in KeyShot via the *Edit, Add Geometry* menu.

Applying a light material is similar to applying other materials. Drag and drop a light material preset from the *Library* window, *Materials* tab, *Light* folder. You can also double-click on an model, go to the *Material Type* dropdown, and choose one of the *Light Sources* from the list. KeyShot will change the object to a physical light.

When you change a model to a light source, KeyShot will identify the light source in the *Project, Scene* tree by adding a light bulb icon  next to the model name.

Apply a light to a sphere

Tip: Here's a simple example for adding a light to a sphere. From the KeyShot menu, select *Edit, Add Geometry, Sphere*. Move the sphere to the location for the light. Go to the *KeyShot Library, Materials* tab and select the *Light* folder. Drag and drop a light onto the sphere. If you want to reduce the ambient environment light, go to the *Project* window, *Environment* tab, *Settings* and reduce the *Brightness*.

Moving a Light

Right-click the part that is assigned as a light and select  *Move Model*. This will activate the Move Tool. You can also select the light source in the *Project* window, *Scene* tab, then select *Move Tool* from the *Position* tab. Additionally, the input boxes may be used for more precise positioning.

Animating a Light

Since light sources are materials applied to a part, they can be animated just like any other part. Simply select the light in the Scene Tree that you would like to animate, right-click and apply the animation you would like. Visit the [Animation](#) section to learn about the different types of animations.

Interpretation of light

In the *Lighting* tab you can control the interpretation of lighting in your scene. KeyShot comes with a number of presets which make applying global light settings faster. You can also set up custom presets - learn more [here](#).

Performance

This preset disables light source materials and shadows with reduced bounces for the fastest performance possible. This is useful for scene setup and quick manipulation. The option is also available in the Ribbon.

Basic

This preset provides simple, direct lighting with shadows for basic scenes and fast performance. This is useful for rendering simple models illuminated by the environment.

Product

This preset provides direct and indirect lighting with shadows. This is useful for products with transparent materials illuminated by the environment and local lighting.

Interior

This setting features direct and indirect lighting with shadows that is optimized for interior illumination. This is intended for complex interior illumination with indirect lighting; although it can also be used to avoid noise created by local lights and provide more accurate sampling of HDRIs with very small and strong light sources such as Sun & Sky.

Jewelry

This setting features the same settings as the Interior preset with the addition of Ground Illumination, increased Ray Bounces, and Caustics.

Custom Lighting Preset

In the *Lighting* tab of the *Project Panel* you find the Lighting settings.

Environment Lighting

Shadow Quality

The slider determines the quality of shadows, in the sense of how high priority the rendering of shadows in the scene is when rendering with *Maximum Samples* or *Maximum Time*.

Ground Illumination

When *Ground Illuminations* are on, the rays bounced of the ground will produce indirect lighting.

Self Shadows

When *Self Shadows* are on, the objects in the scene will cast shadows on themselves, otherwise the objects will only cast shadows on the ground.

General Lighting

Ray Bounces

Ray bounces are the number of times rays of light are calculated as they bounce around a scene.

Global Illumination

Toggle if you want to see indirect ray bounces between objects in the scene.

Global Illumination Bounces

When *Global Illumination* is on, *Global Illumination Bounces* allow you to control the maximum number of times the light is reflected diffusely as it passes through the scene.

Caustics

Enable/disable caustics in the scene. See the [Refractive Index](#) page for more info about caustics.

Rendering Techniques

The Rendering techniques are optimized for different scenarios.

Product mode

is best for scenes where the camera "looks" at the objects from outside.

Interior mode

The interior mode is optimized for enclosed spaces.

On this page

- [Environment Lighting](#)
- [General Lighting](#)
- [Rendering Techniques](#)
- [Save Custom Preset](#)

Note

Interior Mode uses a different and more intelligent approach to samples than the one Product mode uses. The improved approach means that customization of *Material Samples* only has effect in Product Mode as it is not necessary in Interior Mode.

You can set material samples under the *Roughness* parameter in most materials and under *Advanced* in following

material types; *Translucent* and *Area Lights*.

Save Custom Preset

When you have customized the settings you can save them as your own preset by clicking the  icon next to the custom preset drop-down.

Cameras


The *Camera* tab controls the settings for all camera views in KeyShot and allows you to set the active KeyShot camera. It also allows you to save different camera views of your scene, which allows cameras to be re-used, modified, animated or used in [Studios](#).

Cameras can be adjusted much like a real camera and include advanced functionality such as shift lenses, walkthrough mode and Depth of Field, along with KeyShot Pro features such as panoramic lenses, to produce cube or spherical maps for real-time VR rendering and output.

This section explains how to work with the different types of cameras and their respective settings.

In this section

- [Navigating Your Scene](#)
- [Camera List](#)
- [Position and Orientation](#)
- [Lens Settings](#)
- [Stereo \(VR\)](#)
- [Depth of Field](#)

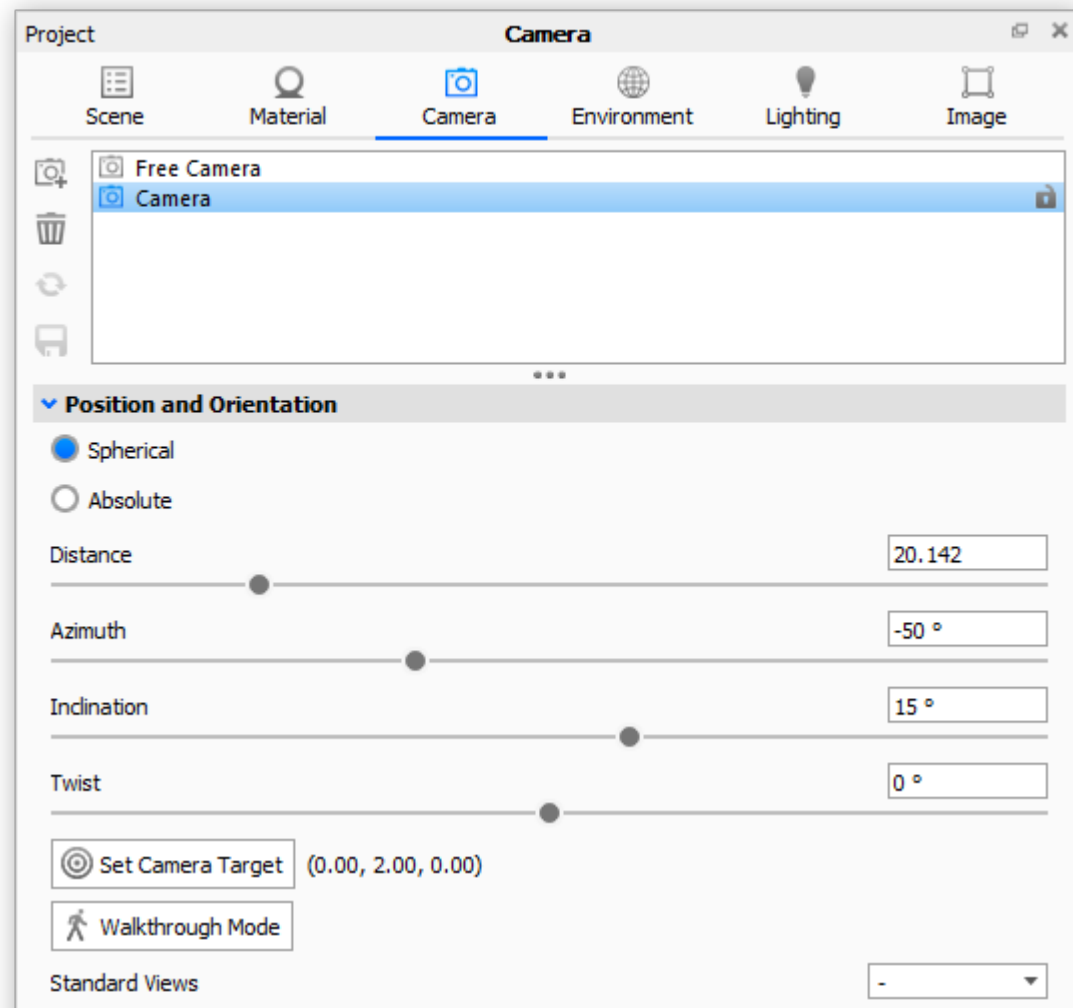

Grid

None ▼

☐ Stay Above Ground

▼ **Lens Settings**

☒ Perspective

☐ Orthographic

☐ Shift

☐ Panoramic

 Match Perspective

Perspective / Focal Length

35 mm

Field of View

54.432 °

☐ Ground Grid

> ☐ **Stereo**

> ☐ **Depth of Field**

Navigating Your Scene

The following explains how to use your mouse to change the view of your camera. It's important to realize that the mouse is moving the camera and not the model, unlike a 3D modeling application. In other words, when you use Left Mouse Button (LMB) to rotate, the camera is rotating around the model.

To change the position of the models, see [Moving Models and Parts](#).

Mouse Controls

The mouse is the main method for controlling the position and orientation of the camera. With it, you can rotate, pan and change distance

Camera Tumble (Rotate)

To tumble your camera, press and hold LMB while moving the mouse. This changes both the azimuth and inclination of the camera.

Camera Pan

To pan your camera press and hold the MMB while moving the mouse. This changes the position of the camera.

Camera Dolly (Distance)

To dolly your camera, roll the scroll wheel forward to increase distance or back to decrease distance.

Keyboard Controls

KeyShot also provides additional ways to navigate your scene and control your camera using the keyboard.

Camera Dolly (Distance)

To dolly your camera, press Alt + RMB (Windows/Mac) while moving the mouse. This changes the *Distance* of your camera.

Camera Perspective

To change camera perspective, press Shift, Alt + RMB (Windows/Mac). This will adjust *Distance*, *Perspective/Focal Length* and *Field of View*.

Camera Twist

To twist the camera, press Ctrl, Alt + Wheel (Windows) or , Alt + Wheel (Mac).

Standard Views

To cycle through the standard view (front, back, left, right, top, bottom, isometric select Ctrl, Alt + 1-7 (Windows) or , Alt + 1-7 (Mac)

Focal Length

To change Focal Length press Alt + Wheel (Windows/Mac). This will adjust *Perspective/Focal Length* and *Field of View*.

Set Camera Target

To quickly center the camera on an area, select Ctrl, Alt + RMB (Windows) or , Alt + RMB (Mac).

Next Camera/Viewset

To toggle through cameras and viewsets, press Shift + N.

Toggle DOF

To toggle Depth of Field (DOF) press D.

On this page

- [Mouse Controls](#)
- [Keyboard Controls](#)
- [Multi-touch Controls](#)

All KeyShot hotkeys can be seen [here](#).

Multi-touch Controls

Basic touch controls allow you to orient the camera on touch-enabled devices.

- **1 Finger** – Tumble camera
- **2 Finger Pinch** – Zoom
- **3 Finger Drag** – Pan
- **5 Finger Touch** – Reset camera

Learn more about multi-touch input [here](#).

Camera List

The camera list at the top of the Camera tab contains all the cameras for the scene. In the camera list, the *Free Camera* is always available and cannot be locked or overwritten. It can always be selected and remains independent of camera animations.

Add Camera

To create a new camera, select *Add new camera*  to the left of the camera list. This will add the current camera view to the *Camera List*.

Cameras can be renamed for easy identification and better organization, simply right-click and select *Rename*.

Add Camera and Environment Studio

The *Add Camera and Environment Studio*  is a Pro feature that allows you to add a Studio along with the currently active camera and environment.

Note: This replaces the Viewset functionality from KeyShot 5/6. Read more information about the Studio feature and Viewset to Studio conversion [here](#).

Edit camera

After a camera is saved, any change made while that camera is active will display *(unsaved)* after the camera name. To save the changes simply select *Save Current Camera* . If you do not want to apply changes, select *Reset Camera*  to revert the active camera to its last saved state.

Adding a new camera to the list will add a camera with the current setup, while the previously selected camera will be reverted to the last saved state.

Locked Camera


Any camera can be locked by right-clicking on the name or by selecting the lock icon. When a camera is locked the Tumble/Pan/Dolly options in the ribbon will be disabled

Delete Camera

Any unlocked camera can be deleted using the *Remove current camera* .

On this page

- [Add Camera](#)
- [Add Camera and Environment Studio](#)
- [Edit camera](#)
- [Locked Camera](#)
- [Delete Camera](#)

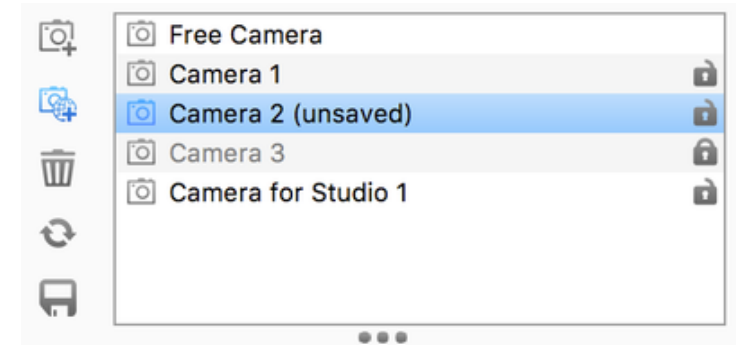

Position and Orientation

All KeyShot cameras are defined by their position in 3D space in relation to the Camera Target. The Camera Target specifies the exact mathematical point or location the camera is “looking at.” This relationship is critical to understand, especially when fine-tuning settings and creating camera animations.

Camera Mode - Spherical

Default setting for defining position and orientation of the camera.

When using the default Spherical definition all values reflect camera position in relation to the static Camera Target.

Distance

Distance between the Camera Target and Camera in scene units. Setting this value too low can lead to the camera being “inside” the 3D model. This can be controlled with the mouse scroll wheel. The direction can be inverted in Preferences.

Azimuth

Rotation around KeyShot up (Y) axis, measured in degrees.

Inclination

Defines camera tilt, or vertical rotation from horizontal plane.

Twist

Twists/rotates the camera around its own axis.

Camera Mode - Absolute

Here you can set the position of the camera (Position) and the camera target (Target) relative to the global X-axis, Y-axis, and Z-axis.

Position

Defines X/Y/Z coordinates of camera location in scene units.

Target

Defines X/Y/Z coordinates of Camera Target in scene units.

Keep View Direction

Locks View Direction for Position/Target changes. When unchecked, the camera will keep looking at the target while the Position values are changed. If the checkbox is checked, the camera direction will be kept and therefore the Target point will change as the Position is changed.

On this page
• Camera Mode - Spherical • Distance • Azimuth • Inclination • Twist • Camera Mode - Absolute • Position • Target • Keep View Direction • Twist • Set Camera Target • Walkthrough Mode • Standard Views • Grid • Stay Above Ground

Twist

Twists/rotates the camera around its own axis.

Set Camera Target

With Set Camera Target you can click on a surface in the real-time view to define it as the camera target. The camera will now tumble, pan & dolly in reference to this exact point on the surface. In the Geometry panel you can always see where the camera target is.

Next to the button the position of the Camera Target is displayed as coordinate values.

The default Camera Target is always the center of geometry in the scene.

Tip

To reset the camera target, you can right-click in the *Real-Time View* and select *Center and Fit Models*. This will use the center of all objects in the scene and dolly to a distance where all parts are within view.

Walkthrough Mode

See [Walkthrough Mode](#).

Standard Views

Quickly access camera presets based on common orthographic directions. Note that this does not automatically change the camera to the orthographic lens only the position of the camera.

Grid

Enables on-screen grid which can be helpful for image composition and camera placement. The grid will not be visible in rendered output.

Stay Above Ground

This option allows all camera movements to be restricted to the upper hemisphere. This is useful for scenes where bottom views are undesirable.

Position and Orientation

☒ Spherical

☐ Absolute

Distance

Azimuth

Inclination

Twist

 Set Camera Target (0.00, 0.05, 0.29)

 Walkthrough Mode

Standard Views

Grid

☐ Stay Above Ground

▼ Position and Orientation

☐ Spherical

☒ Absolute

Position

Target

X  

Y  

Z  

☒ Keep View Direction

Twist 

 Set Camera Target (0.00, 0.05, 0.29)

 Walkthrough Mode

Standard Views

Grid

☐ Stay Above Ground

Walkthrough Mode

Walkthrough Mode allows you to move around inside your scene and see it from a "first-person" point of view.

To enter Walkthrough Mode go to *Project* window, *Camera* tab, *Position and Orientation*. Select *Walkthrough Mode* and the Walkthrough Mode HUD will appear and a camera called *First Person* will be added to the camera list.

Eye height

The eye height indicates the height of the camera in relation to the lower object.

Lock Eye Height

Locking the eye height will keep the camera at a constant height and will ignore the ground detection setting covered below.

Ground Detection

Ground detection will automatically adjust the camera height in order to keep it at the set Eye Height specified above. If you move towards an object such as stairs, the camera will appear to be going up the stairs and will respect the "new ground".

Collision Detection

Selecting this setting will keep you from moving through objects. This is used to make the walkthrough more realistic by not allowing you to move through objects that you should not be able to go through.

Arrows

Click and hold the arrows to "walk" around your scene in the arrow's direction.

Sensitivity

Like its name describes it, this adjustment will control the sensitivity of the controls in order to move around the scene in Walkthrough mode. You can either move the slider around or type a value in the box.

Accept/Cancel

- Clicking the X at the bottom right cancels any changes and deletes the camera from the list.
- Clicking the V at the bottom right accepts any changes and saves the *First Person* camera.

On this page

- [Eye height](#)
- [Lock Eye Height](#)
- [Ground Detection](#)
- [Collision Detection](#)
- [Arrows](#)
- [Sensitivity](#)
- [Accept/Cancel](#)



Walkthrough Navigation

To navigate within the scene in Walkthrough Mode, you can:

1. Use the arrows on your keyboard or the arrows in the widget.
2. Hold the left mouse button and drag in the direction you would like to move.
3. Hold the right mouse button and drag to rotate in place.

4. Hold the middle mouse button to pan the camera.

Lens Settings

The various Lens Settings can be found in the *Projects* window, under *Camera* tab, *Lens Settings*. The Lens types include:

- [Perspective](#)
- [Orthographic](#)
- [Shift](#)
- [Panoramic](#)

In this section

- [Perspective](#)
- [Orthographic](#)
- [Shift](#)
- [Panoramic](#)

Perspective

The *Perspective* lens closely represents how a physical camera lens works.

Tip

When trying to match perspective in an backplate image, it is recommended to set the Perspective value to the camera lens focal length which is often included in the Exif data.

Match Perspective

Perspective Matching allows you to interactively match the *Perspective* camera to the camera with which a background image was taken. In order to activate *Match Perspective*, please load a *Backplate*. See [Adjusting Environments](#) for further information on this topic.

When clicking on the *Match Perspective* button, A widget apperas in the Real-Time View and you will also notice 2 or 3 sets of vanishing lines in different colors - The lines and colors correspond to the scene's coordinate system. X is blue, Z is red, and Y is green.



Two-Point Perspective

This is the mode used in most cases.

Adjust the vanishing lines according to the plane on which the object is placed.

Three-Point Perspective

Three point perspective is most commonly used when trying to place building or object when the camera is placed at a low or high eye level.

Adjust the perspective with 3 sets of orthogonal lines to match the vanishing points to the plane on which the object is placed and of vertical lines. Make sure the up axis of the matched perspective is the same as the one in the scene.

Lock Rotation

When the rotation is locked any adjustments to the 3 sets of lines will not affect the [azimuth](#).

Ground Grid

Turn on ground grid in the scene to help match the perspective. the grid will not be visible in rendered output.

Reset lines

Reset all sets of lines to their default position. The camera will update accordingly.

For best results we recommend to turn on *Show Coordinate Legend*, found under the *View* menu. It can also be toggled on and off using the Z hotkey. This will help you identify the orientation of the model in the scene.

On this page

- [Match Perspective](#)
- [Perspective / Focal Length](#)
- [Field of View](#)
- [Ground Grid](#)
- [Popular focal lengths](#)

▼ Lens Settings

- ☒ Perspective
☐ Orthographic
☐ Shift
☐ Panoramic



Perspective / Focal Length

Field of View

☒ Ground Grid

Tip

For the best results try to find orthogonal lines in the backplate image that you can use as guides when matching the perspective. Move the end points of the lines according to the coordinate layout to reference points in the background image. Notice the camera values update accordingly. Once aligned, pan and dolly the camera to position the object so it fits properly inside the scene.

Perspective / Focal Length

The *Perspective / Focal Length* controls the amount of distortion (convergence) seen in the Real-time View; real world values can be used here to replicate camera lens focal lengths.

Field of View

Field of View (FOV) is inversely related to Perspective and controls the “cone of vision” seen in the Real-time View. Larger Perspective values will result in a smaller Field of View, while smaller Perspective values increase the amount that's visible in the Real-time View.

Ground Grid

Ground Grid will overlay a 1:1 grid on the KeyShot ground plane; the density of the grid is controlled by the Environment size. This grid is useful for matching perspective and camera angles and will not be visible in rendered output.


Popular focal lengths

(Source: [Wikipedia](#))

- 14 to 21mm: Ultra-Wide — Dramatic distortion due to very short focal length.
- 24 to 35mm: Wide — Wider field of view than a standard lens. The resulting perspective can show some distortion.
- 50 mm: Standard — Some distortion but generally acceptable for most use.
- 85 mm: Portrait — Less distortion than standard lenses.
- 135 mm: Telephoto — Commonly used to capture faraway objects or in product photography for
- 200 to 500 mm: Super Telephoto — Specialized lenses for minimal distortion.

Orthographic

An *Orthographic* lens uses parallel projection to view the scene: all lines parallel to each other appear parallel regardless of camera distance or position. An orthographic lens is most commonly found in CAD modelers and is not affected by perspective distortion, foreshortening, or parallax. This means that relative distance in the realtime view is always accurate for any parallel or perpendicular lines.

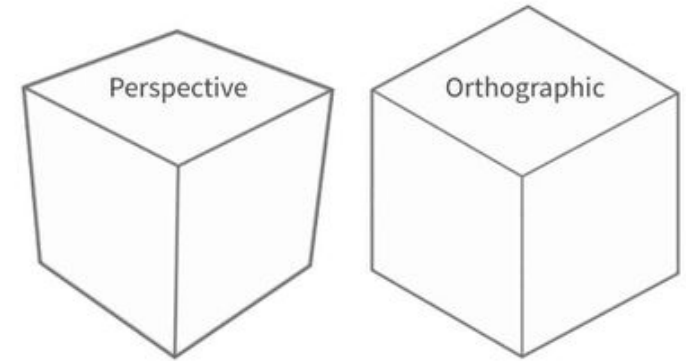

Shift

A *Shift* lens is useful for recreating two-point perspective camera views. It allows you to keep a camera's position while shifting the viewing plane to eliminate vertical distortion. Most commonly seen in architectural photography, a Shift lens can be used to remove the third (vertical) vanishing point in product photography.

Estimate Vertical Shift

To use the Shift lens, press the *Estimate Vertical shift* button. This will set your camera facing forward and calculate the *Vertical Shift* value, needed to achieve a 2 point perspective lens

Perspective/Focal Length and Field of View

Perspective/Focal Length and *Field of View* controls the amount of distortion (convergence) seen in the Real-time View, real world values can be used here to replicate camera lens focal lengths.

Vertical Shift and Horizontal Shift

These control the vertical and horizontal movement of the camera's viewing plane; these values can be adjusted beyond the slider extents (including negative values!) to control what's visible in the *Real-Time View*.

Any time the camera position is changed, it is necessary to re-calculate the shift values by pressing the *Estimate Vertical Shift* button. This ensures that the values are correct for the current camera position and orientation.

Ground grid

Ground Grid will overlay a 1:1 grid on the KeyShot ground plane; the density of the grid is controlled by the Environment size. This grid is useful for matching perspective and camera angles and will not be visible in rendered output

Learn more

A blog post showing the use of the Shift lens can be found here: <https://blog.keyshot.com/2016/use-shift-lens-setting-keyshot>

On this page

- [Estimate Vertical Shift](#)
- [Perspective/Focal Length and Field of View](#)
- [Vertical Shift and Horizontal Shift](#)
- [Ground grid](#)

▼ Lens Settings

- ☐ Perspective
- ☐ Orthographic
- ☒ Shift
- ☐ Panoramic

Estimate Vertical Shift

Perspective / Focal Length

Field of View

Vertical Shift

Horizontal Shift

☐ Ground Grid

Panoramic

The *Panoramic Lens Setting* for Cameras allows you to render a Spherical or Cube Map image in real-time or rendered output. This feature can be used to render out your own spherical EXR images to use as environments to light KeyShot scenes or to load in your VR headset image viewer.

Whenever a *Panoramic lens* is used, the camera position will be limited to spherical 360 degree viewing and the camera target is used as a position reference.

Using the Panoramic Camera

In the *Camera* tab, under *Lens Settings*, select *Panoramic*. Select your desired format of *Spherical* or *Cube Map* from the *Mode* radio buttons. The *Real-time View* will display a *Panoramic Preview* message at the top to indicate you are Panoramic mode. This means the camera can be rotated spherically and the real-time rendering in the *Real-time View* will not occur.

Cube Map mode

When using the *Cube Map Mode* the *Resolution* in the *Image* tab will be locked at a 6:1 ratio. Cube Maps are essentially 6 squares that make up a cube, and they are primarily used with VR Headsets

Spherical Mode

When using the *Spherical Mode* the *Resolution* in the *Image* tab will be locked at a 2:1 ratio. Spherical maps are 1 image and they can be used to create EXR images for

Tip

If the map does not appear clear, try to increase the pixel count of the current Resolution in the Image tab

Preview Map

Click the *Preview Map* button to open a flat preview of your Panoramic image.

Reset Panoramic Camera

In the bottom of the Real-Time View there is a button which enables you to return the camera to the original view.

Moving a Panoramic Camera

Since the Camera Position is limited to spherical 360 degree viewing, there may be times where you want to adjust the camera position. There are two ways to move a Panoramic Camera.

1. Position and Orientation

You can use the *Position and Orientation* sliders or input boxes in the *Camera* tab to adjust *Distance*, *Azimuth*, *Inclination* and *Twist*. Grab the slider to make fast adjustments or enter a value into the input box for more precision.
2. Geometry View (Pro only)

If you are using KeyShot Pro, you can move the camera in the geometry view.You can open the Geometry View (*Windo*

On this page

• Using the Panoramic Camera

• Cube Map mode

• Spherical Mode

• Preview Map

• Reset Panoramic Camera

• Moving a Panoramic Camera

- Related Pages

▼ Lens Settings

Perspective

Orthographic

Shift

Panoramic

Mode

Cube Map

Spherical

Preview Map

Related Pages

Content by label

There is no content with the specified labels

w, *Geometry View...*), select the Geometry View icon on the Ribbon or hit the *O*-key.

In the Geometry View, right-click the active camera and select *Move Active Camera Position* to adjust the camera.

When you move the active camera, you will see it automatically adjust to keep the same camera target.

Stereo (VR)

Stereo mode will display when *Perspective* or *Panoramic* is selected in *Lens Settings*.

The Stereo setting allows for a scene to be viewed in real-time or output as still images and animations using virtual reality (VR) hardware.


Spherical and Cube Maps offer a 360-degree stereo viewing experience while Stereo Perspective shows a stereoscopic image of the viewport. For more information on using KeyShot with VR devices, please see the [Virtual Reality](#) section.

Head-Mounted Display (HMD)

Support is available for real-time viewing using Oculus Rift and HTC Vive Head-Mounted Display (HMD) viewing (currently Windows only). From the *Camera* tab, enable the *Stereo* option for your *Perspective* or *Panoramic* camera. Click the *Head-Mounted Display* button to select Oculus Rift or OpenVR for HTC Vive to open the HMD viewing window.

Note

An HMD must be connected for the Head-Mounted Display button to be enabled and viewing window to be activated.

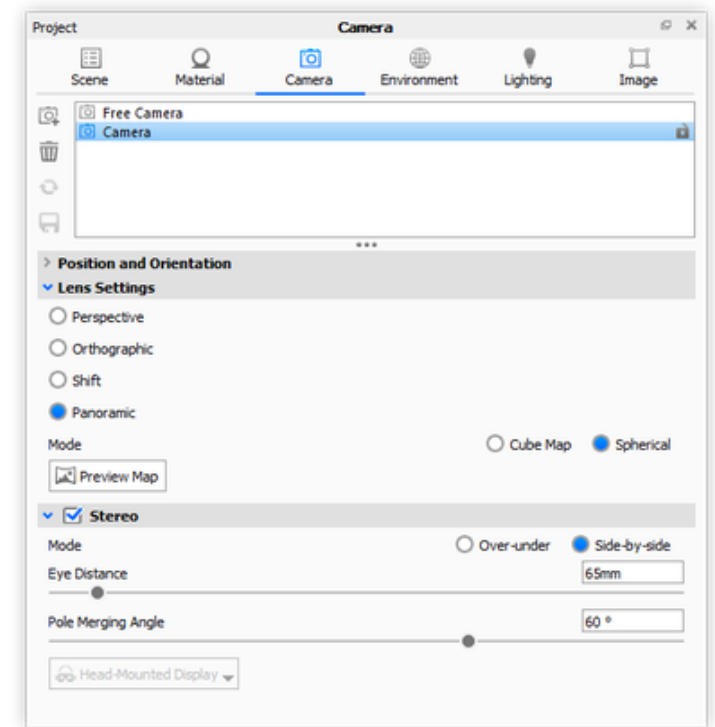

Depth of Field

Depth of Field allows you to set the focus distance and the f-stop of the camera just like you would with a regular camera.

To enable the depth of field, go to Project Camera and click on the Depth of Field check box, or hit the *D* hotkey. Once enabled you can either use the *Select Focal Point* button or use the manual values to set the focal distance.

Select Focal Point

By clicking on the *Select Focal Point* button you can then click on any part of the real-time view and *KeyShot* will focus on that point and blur out rest of the scene in accordance with the F-stop.

Focus distance

The distance from the camera to where the image is the sharpest.

F-stop

Adjusts the virtual aperture of the camera. This determines the extent of the area that is "in focus".

High *F-stop* values will produce the deepest images, while smaller *f-stop* values result in more shallow images, where the front/background are blurred.

Tip

When Depth of field is enabled, turn on the Geometry View to see a visual representation of Focus Distance and F-stop.

Depth of field is only used with Perspective, orthographic or shift lenses.

On this page

- [Select Focal Point](#)
- [Focus distance](#)
- [F-stop](#)

▼ ☒ Depth of Field



Focus Distance

20,142

F-stop

1

Image


This section covers all items found in the *Image* tab of the *Project* window.

Note

Render Region have in KeyShot 8 been moved out of the Image tab. It can now be found in the Ribbon  and when enabled the size can be entered in the Real-Time View.

In this section

- [Resolution](#)
- [Image Styles](#)

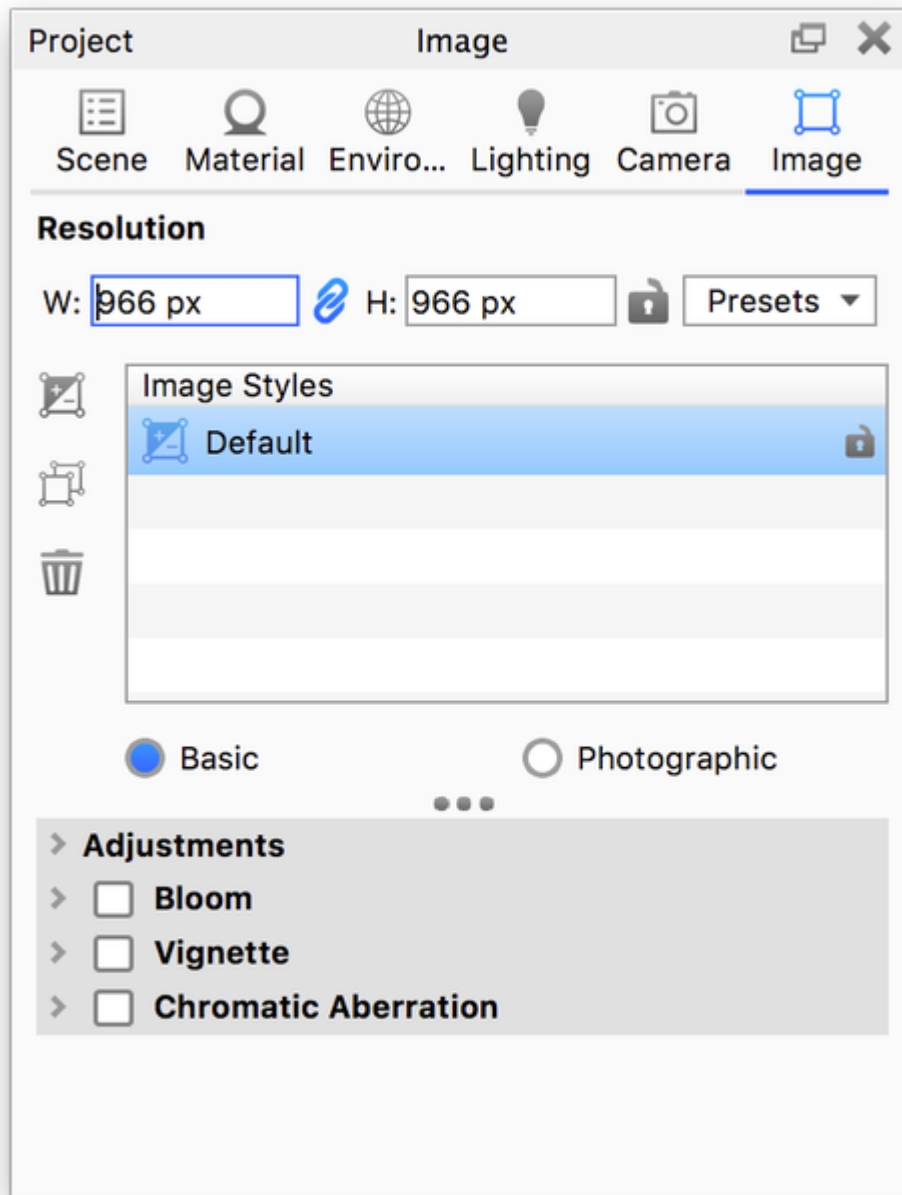

Resolution

Resolution is the first item found in the *Project > Image* tab. This resolution defines the width and height in pixels of the real-time view and the aspect for final image output. For example, if you plan to render at 1920*1080px you want to make sure the resolution set in the *Image* tab has the same aspect.

Lock Aspect

When *Lock Aspect* is the active the *Real-Time View* will adapt to the size of the application window while maintaining the correct aspect ratio for the image. The aspect ratio set here also defines the the aspect of the final image output.

Lock Resolution

If you do not want the *Real-Time View* to adjust size as you resize the docked windows and application window you can enable *Lock Resolution*. This will make sure your image always matches the given pixel size .

Presets

KeyShot comes with a number of standard presets which can be selected from the *Presets* dropdown. This will automatically lock the aspect to the selected preset and the image will fit within the Real-Time View. Meanwhile if you have *Lock Resolution* checked and the application window is not docked when selecting a preset, the Real-time View will adapt to the size of the image and may even exceed the size of the monitor

If your desired output resolution is not populated in the *Presets* dropdown you can manually type in the values or you can create a custom resolution or aspect preset by selecting *Edit Custom* from the *Presets* dropdown. Once created, you can access your custom presets through the *Custom* flyout menu in the *Presets* dropdown.

Tip

If the image does not adapt to the size of the Real-Time View automatically try to move the camera or resize one of the docked windows.

Resolution

W: 1302 px



H: 900 px



Presets ▾

Custom Resolution

Add and Edit Custom Resolution Presets

Define custom pixel dimensions

Name	Width	Height
Thumbnail image	200	150

Define custom aspect ratios

Name	Width	Height
Banner	5	2

Cancel

OK

Image Styles

Image Style allow you to add non-destructive image adjustments to your scene and see the result instantly. The Image Style adjustments include tone, curve, color and image effect settings that can be applied and seen in the *Real-time View* or render output window.

Image Style List

The Image Style list allows you to add an unlimited of Image Style variations. Additionally, when setting up [Studios](#), you can combine them with Cameras, Environments, Model Sets and Multi-Materials.

Image Style Types

KeyShot has two types of Image Styles:

- [Basic Image Style](#) - Includes basic adjustments for *Exposure* and *Gamma*.
- [Photographic Image Style](#) - Offers more versatile adjustments including *Tone Mapping*, *Curve*, *Color* and *Layers*.

Both Image Style types have options for *Bloom*, *Vignette*, and *Chromatic Aberration*.

Previous Versions

- *Basic* Image Style is almost identical to the *Image Adjustments* and *Image Effects* options in previous versions of KeyShot. If you open a scene from a previous version with Image Adjustments/Effects they will be added as a *Basic Image Style*.

How Image Styles Are Applied

Image Styles are applied in two ways. First, they can be set up in real-time and seen in the Real-time View as you work. When rendering, they are applied post-process (after the rendering), so they will not affect render performance or time. This also means that render previews in *Network Rendering* will not show the Image style adjustments

In this section

- [Basic Image Style](#)
- [Photographic Image Style](#)

Basic Image Style

Adjustments

- **Exposure** - Determines how affected the scene is by the light. Increasing the EV (exposure value) by 1 will double the amount of light in the image.
- **Gamma** - Adjust the image's intensity with gamma. Decreasing the gamma will make the image darker while increasing the gamma will lighten the image.

Bloom

- **Bloom Intensity** - The brightness of the light fringing or glow.
- **Bloom Radius** - Determines how far the bloom glow extends in pixels.

Note

The Bloom radius is defined in pixels and this value is not relative to the resolution. This means that the bloom radius will not scale in the Render Output has a larger resolution than the Real-Time View.

- **Bloom Threshold** - The clipping of the bloom glow to bright pixels. A value of 0 means no clipping. Larger values focus the bloom on the brightest pixels.

Vignette

- **Vignette Strength** - Determines how strong the vignette is, the higher the value the more solid the vignetting color will seem in the corners.
- **Vignetting Color** - Choose the color that the vignette fades into, defaults to black. Click in the color-field to trigger the color selector.

Chromatic Aberration

Chromatic Aberration occurs in real life when the camera lens is unable focus all colors to the same point. This results in colored fringing along the edges of the object. With Image styles you get an approximation of the effect.

- **Aberration Strength** - Determines how strong the effect is.
- **Aberration Bias** - Controls the color of the distortion.

Known Issue

Using Chromatic Aberration on a model that exceeds the image size may cause artefacts near the edges.

Legacy image styles

If you open a KeyShot 7 scene with Image Adjustments/Effects they will be added as a Basic Image Style

On this page

- [Adjustments](#)
- [Bloom](#)
- [Vignette](#)
- [Chromatic Aberration](#)

☒ Basic

☐ Photographic



▼ Adjustments

Exposure

Gamma

▼ ☒ Bloom

Bloom Intensity

Bloom Radius

Bloom Threshold

▼ ☒ Vignette

Vignetting Strength

Vignetting Color

▼ ☒ Chromatic Aberration

Aberration Strength

Aberration Bias

Photographic Image Style

The *Photographic Image Style* takes advantage of the HDR image and gives you more control when you want enhance details in areas that would otherwise be perceived as underexposed or blown out. In the *Basic Image Style* the range is linear and stops at pure white (*Whites*) while *Photographic Image Style* offers control of the range beyond *Whites* with *Highlights*.

Tone Mapping

- **Exposure** - Determines how affected the scene is by the light. Increasing the EV (exposure value) by 1 will double the amount of light in the image.
- **White Balance** adjust the color temperature of your image. Negative values will return warmer tones and positive will give cooler tones.
- **Contrast** - Determines the difference between black and white. When you lower the contrast the colors will start melding together, while increasing the contrast will make bright parts brighter and dark parts even darker.

Curve

- **Histogram** - The histogram gives a visual representation of the shadows, midtones, lights, whites and highlights in the image. Each control point is tied to a value and any changes made to either the input values or position of the control points will update respectively. The Histogram can be hidden/shown by toggling the little triangle next to the Histogram title.
- **Shadows** - Add detail in these areas by increasing the shadow value or make the dark areas of your image seem even darker by decreasing the value.
- **Midtones** - When adjusting the *Midtones* you affect the values mid-way between shadow and highlight. Increasing the value makes midtones lighter while decreasing makes midtones darker.
- **Lights** - Adjusting the Lights value will affect the lighter areas within the midtone range.
- **Whites** - This value represents the "white-point" e.i. the equivalent of white paper seen in daylight. Increasing the value will make whites seem "whiter" - while decreasing the value will make them more grey.
- **Highlights** - Adjusting *Highlights* affects the areas that are receiving the largest amount of light and are reflecting light source most efficiently. Add detail to the these areas of your image by decreasing the highlight value or make the areas seem even brighter by increasing the value.

Color

- **Saturation** - Uniform increase/decrease of the intensity of the colors. Negative values will de-saturate your image while increasing the value will make the colors in you image more saturated. 0 is neutral.
- **Vibrance** - Increases the the intensity of more muted colors without adjusting the the saturated colors.

Bloom

- **Bloom Intensity** - The brightness of the light fringing or glow.
- **Bloom Radius** - Determines how far the bloom glow extents in pixels.

Note

The Bloom radius is defined in pixels and this value is not relative to the resolution. - This means that the bloom radius will not scale if the Render Output has a larger resolution than the Real-Time View.

- **Bloom Threshold** - The clipping of the bloom glow to bright pixels. A value of 0 means no clipping. Larger values focus the bloom on the brightest pixels.

On this page

- [Tone Mapping](#)
- [Curve](#)
- [Color](#)
- [Bloom](#)
- [Vignette](#)
- [Chromatic Aberration](#)
- [Layers](#)

Vignette

Vignetting adds a light fall-off where the image typically gets darker towards the corners.

- **Vignette Strength** - Determines how strong the vignette is, the higher the value the more solid the vignetting color will seem in the corners.
- **Vignetting Color** - Choose the color that the vignette fades into, defaults to black. Click in the color-field to trigger the color selector.

Chromatic Aberration

Chromatic Aberration occurs in real life when the camera lens is unable focus all colors to the same point. This results in colored fringing along the edges of the object. With Image styles you get an approximation of the effect.



- **Aberration Strength** - Determines how strong the effect is.
- **Aberration Bias** - Controls the color of the distortion.

Known Issue

Using Chromatic Aberration on a model that exceeds the image size may cause artifacts near the edges.

Layers

- **Background Color** - Checking the background color will place model on a solid colored background, you can set the color here - click the color-field to trigger a the color selector.

Environment background

Using a background color in the Photographic Image style will override the Environment background setting. However the colors of the shadow will still be influenced by the environment settings - So to achieve the best shadows it is a good idea to use a black background in the environment, when using a Image Style Background color

- **Use Frontplate** - With Frontplate you can add an image-layer in front of the image.
 - Add image by pressing the folder icon  or by dragging an image onto the input field either from a local folder or from the library. Supported file formats include .jpg, .jpeg, .tif, .tiff, .bmp, .png, .gif, .dds, .hdr, .hdz, .exr, .tga, .ppm, .ktx, .psd.
 - You can refresh the Frontplate by clicking the refresh icon .
 - To delete a Frontplate click the trash icon .

Note

Images used as Frontplates will be stretched to fit the current aspect ratio.

☐ Basic ☒ Photographic

▼ Tone Mapping

Exposure 0,75 EV

White Balance 0

Contrast 0,2

▼ ☒ Curve

► Histogram

Shadows 0,3

Midtones 0,15

Lights 0,1

Whites 0,15

Highlights 0,15

▼ ☒ Color

Saturation 0,075

Vibrance 0,8

- **Opacity** - Set the opacity of the Frontplate by adjusting the slider or by entering a value from 0-1, where 0 is fully transparent and 1 is solid.

Bloom

Bloom Intensity

0

Bloom Radius

5 px

Bloom Threshold

0

Vignette

Vignetting Strength

0

Vignetting Color

Chromatic Aberration

Aberration Strength

0

Aberration Bias

Layers

Background Color

Use Frontplate

Opacity

1

Studios

KeyShot *Studios* allow you to combine and save scene/model/material variations in one file for quick creation and presentation. *Studios* may contain any combination of *Camera*, *Environment*, *Image Styles*, *Models Sets* or *Multi-Materials*.

The Studios window

The *Studios* window is a dockable window - launch it via:

- Main menu under *Window, Studios...*
- the Studios icon  in the *Ribbon*
- Hotkey: U

In the top of the Studios window is a list of all the Studios in the scene. The active studio will be highlighted with a blue background.

Inline with the Studio name are icons      that indicate what elements are included in that Studio.

Next to the Studios list you find the options to  *Add new Studio*,  *Delete Studio* and  *Thumbnail settings*.

Under the Studios list you find five drop-down menus that display the currently active *Camera*, *Environment*, *Image Style*, *Model Sets* and *Multi-Materials*.

Setting up a Studio

Click the *Add Studio* icon  in the top left corner to add a new Studio. The new Studio will be pre-populated with the active elements in the scene - but only the active *Camera* and *Environment* are included (checked) by default. You can always check/uncheck any checkbox to include/exclude that element from the Studio.

To modify a Studio simply select a different *Camera*, *Environment*, *Model Set* or *Multi-Material* from the drop-down menus.

Camera

Select which Camera You want to use in your studio. If this is not set, the studio will use the active Camera.

Environment

Select which *Environment* You want to use in your studio. If this is not set, the studio will use the active *Environment*.

Image Style

You can add an Image Style to your Studio, this includes among other things Frontplates. Visit the [Image Style](#) Section to learn more.

On this page

- [The Studios window](#)
- [Setting up a Studio](#)
 - [Camera](#)
 - [Environment](#)
 - [Image Style](#)
 - [Model Sets](#)
 - [Multi-Materials](#)
- [Thumbnails](#)
 - [Thumbnail Settings](#)

If no Image Style is selected the active Image style will be used.

Model Sets

Multiple Model Sets can be added to a Studio by checking the corresponding boxes within the Model Sets drop-down menu.

Multi-Materials

When The Multi-Material is checked, you can select which material (of each of the multi-materials in the scene) you want displayed in the Studio. Select a multi-material in the drop-down and you will see a list of the materials (within that Multi-Material) below the drop-down.

Note


When you are using Studios with the Configurator, any Model Sets/Multi-Materials that are selectable in the configuration will not be considered to be tied to a studio. This means that only Model Sets containing "props" will switch with the Studio. This also applies to multi-materials where only materials of props can change with a studio.

Thumbnails

When a Studio is created a thumbnail is automatically generated. If the Camera is set to *Free Camera* the thumbnail will show the environment. You can generate thumbnails for each Studio by clicking the *Render Thumbnail* button in the bottom of the window. This will create a thumbnail using the active elements of the Real-Time view

Thumbnail Settings

Thumbnails settings allow you to select if/how you want to show thumbnails in the Studios List. You can also choose to reset the thumbnail to the environment thumbnail.

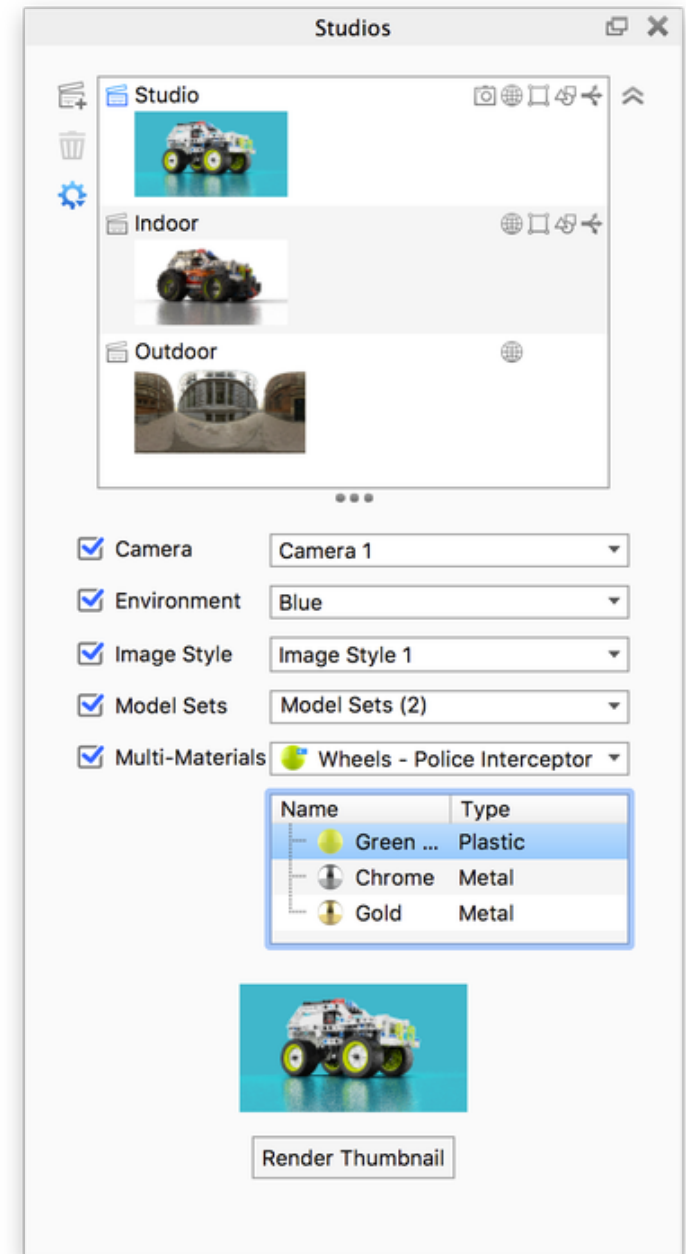


Viewset to Studio Conversion

Viewset to Studio Overview

Prior to KeyShot 7, you could create a **Viewset**, a combination of a Camera and Environment, or a **Scene Set**, a combination of Camera/Viewset and Models. A **Studio** simplifies this by combining options for Camera, Environment, Models and Materials in one window.

Opening Scenes with Viewsets

In KeyShot 7, when a scene with Viewsets and/or Scene Sets is imported, each Viewset and Scene Set is converted to a Studio. When you import a scene that contains Viewsets or Scene Sets, you will see this message:

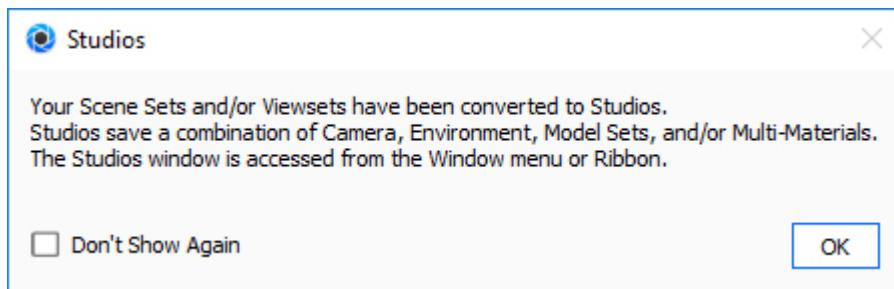

The Studio window should appear after you open the scene. If you do not see it, select *Windows, Studios...* or hit the *U*-key. Any previous Viewset or Scene Set will appear with the same name in the list of Studios.

Studio Workflow for Adding Camera/Environment Combos

Prior to KeyShot 7, when selecting 'Add new viewset' a Viewset would appear in the camera list with a unique Camera and Environment. The same can be done using Studios using the following workflow:

1. Adjust Camera to desired position.
2. Select *Add Camera and Environment Studio* , *Add Locked*.
3. Drag-and-drop an Environment into the Real-time View and repeat step 2.

Another approach is to set a Camera and Environment, then Add a Studio.

1. Select an existing Camera or *Add New Camera* .
2. Select an existing Environment in list or drag-and-drop an Environment into Environment list and select.
3. Select *Add Studio*  from Ribbon or Studios dialog.

You can now cycle through the Studios to view the different Camera and Environment combinations you've created.

Notes on Studios

On this page

- [Viewset to Studio Overview](#)
- [Opening Scenes with Viewsets](#)
- [Studio Workflow for Adding Camera/Environment Combos](#)
- [Notes on Studios](#)

- When you add a Studio, it enables the active Camera and Environment
- If you add a new camera to the camera list, it will use the camera selected
- If the Free Camera is active when a Studio is created, Camera will not be enabled for the Studio
- If you add an Environment to the Environment list, it will use the environment selected

Render

Taking a screenshot of the Real-time View may be adequate for the initial design iteration process but eventually you will need to output high-resolution Still Images, Animations, a KeyShotXR or Configurations. You can do this through the *Render* dialog, which is found on the KeyShot *Toolbar*  or in the *Main Menu* > *Render* > *Render...*

In this section

- [Render Output](#)
- [Render Options](#)
- [Render Queue](#)
- [Render Output Window \(image editor\)](#)
- [Region Rendering](#)

Render Output

The *Output* page is where you define the file specifications. The first step is to select the type of output you desire. There are four types of output:

Still Image

A static image and the default rendering output. [View options.](#)

Animation

An animation with optional video and individual frame output. Note: This option is only available in KeyShot Pro and if there are animations in the scene. [View options.](#)

Learn more about [Animation](#).

KeyShotXR

An interactive KeyShotXR with all code and images. Note: This option is only available if you have the KeyShotXR add-on. [View options.](#)

Learn more about [KeyShotXR](#).

Configurator


A series of still images and their accompanying [Metadata](#) of optional Model, Material, and Studio Variations.

Note: This option is only available in KeyShot Pro and if there are Configurations in the scene that were created through the [Configurator Wizard](#).

In this section
• Still Image Output • Animation Output • KeyShotXR Output • Configurator Output • Layers and Passes

Still Image Output

The *Still Image* output option provides output of a single static image as well as options for render layers, render passes and region rendering.

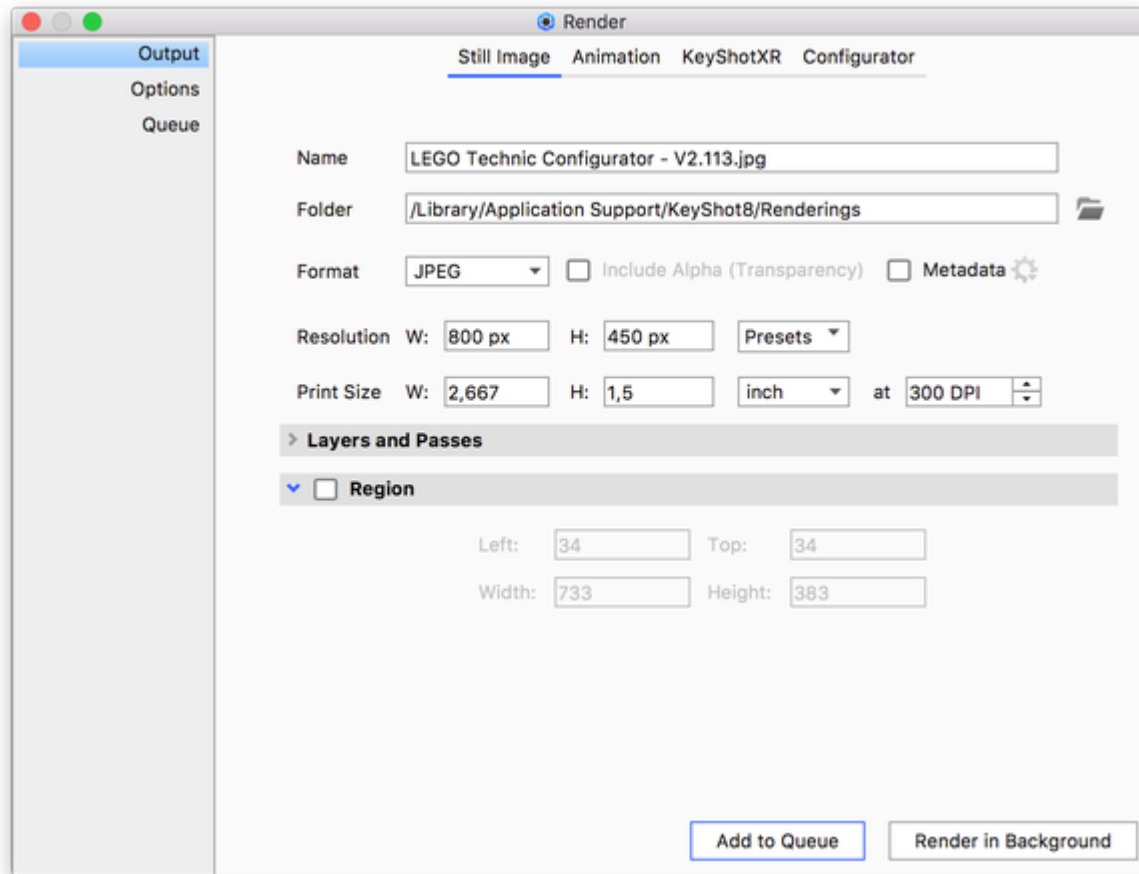

On this page

- [Output Options](#)
- [Layers and Passes](#)
- [Region](#)

Output Options

Name

Set the file name of the render in the text field. If one is not entered, the default name will be the scene name with an incremental suffix.

Folder

Choose where the render will be saved. Unless a specific folder is chosen, it will be saved in your KeyShot 7 Renderings folder.

Format

Choose from PNG, JPEG, EXR, TIFF, TIFF 32-bit, PSD and PSD 32-bit. All formats other than JPEG can include an alpha channel. When PSD or PSD 32-bit is selected you will see a checkbox appear in the Layers and Passes section to *Add to PSD*.

Note

The KeyShot output formats have various bit depths.

8-bit output formats:

- PNG
- JPEG
- TIFF
- PSD

Floating point formats:

- EXR (16-bit half-precision)
- TIFF 32-bit
- PSD 32-bit

Include Alpha (transparency)

If the selected format supports transparency you can choose to include it in your image.

Metadata

When this option is enabled a file will be output with your still image. Metadata provides useful reference information including: scene name, Camera name and properties, Environment name and properties, active Model Sets, active Studio, Lighting settings, material names and Render Quality settings.

Click  to select the format of the metadata:

- **.xmp** - This file can be read by any text editor and can also be imported to Adobe applications.
- **Simple (.meta)** - This file is formatted for easier reading.

Resolution

Set the resolution of the render. Type it in or select from the presets.

Print Size

If final output is for print quality, enter in the dimensions of the print size as well as the desired DPI. After size has been set, the resolution will update with the correct dimensions.

Layers and Passes


See [Layers](#) and [Passes](#) section.

Region

Select the *Region* render checkbox to enable rendering a smaller portion of your overall image. Rendering a smaller region speeds up the rendering time. This is useful when only a small change to one part of a scene is needed. After enabling *Region* render, select and move the drag points to resize the region in the Real-time View window or enter a specific *Left* and *Top* location, or *Width* and *Height*. Note: Units are in pixels.

See the [Render Region](#) page for info about Render Region in the Real-Time View.

Animation Output

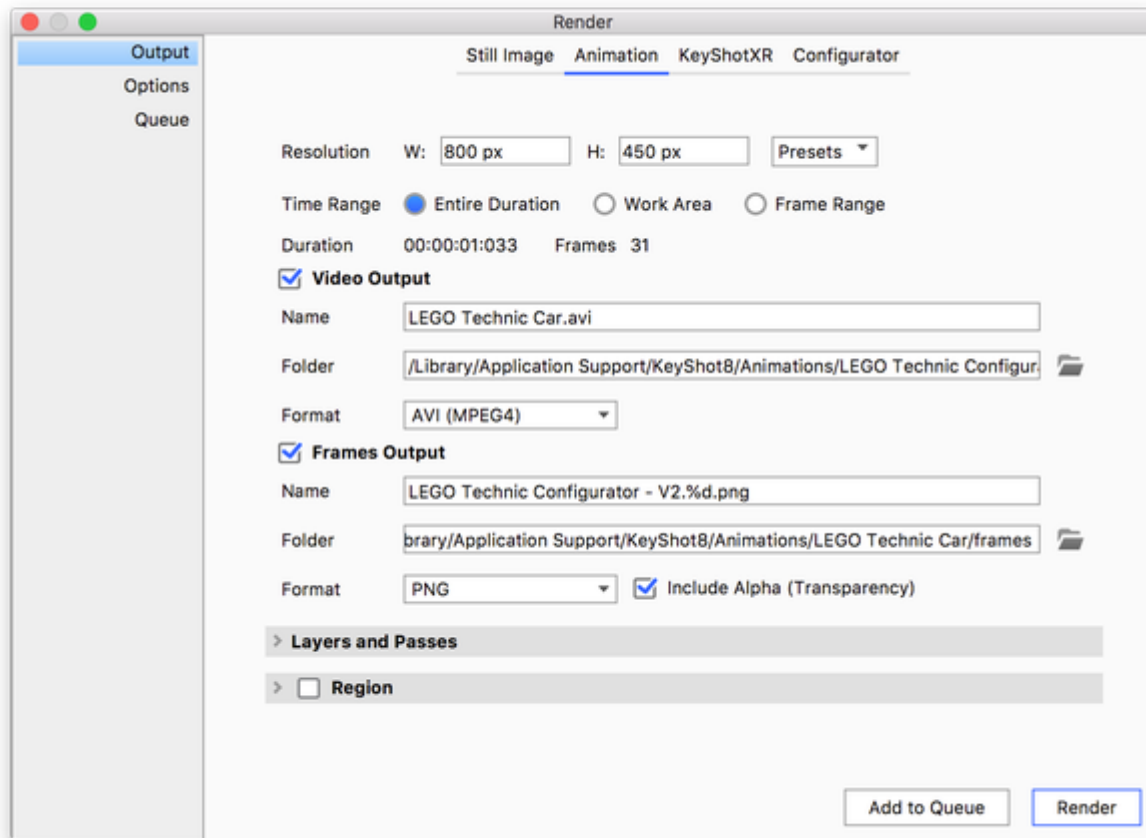

On this page

- [Output Options](#)
- [Layers and Passes](#)
- [Region](#)

Output Options

Resolution

Set the resolution for the animation being rendered. Choose from the *Preset* drop-down, or enter in your own custom dimensions.

Time Range

Specify the range of the animation to be rendered. Default is "Entire Duration." You can also set the designated work area to be rendered, as well a specific frame range. The "duration" and "frames" auto updates when time range is changed.

Video Output

Enable to output a video of the animation. Set the name and Folder location where the animation will be saved. Choose a file format in the drop-down.

Frame Output

Enable to output every frame used to create the animation. Set the file name and folder where the frames will be saved. The "%d" in the name-input adds a sequenced postfix to the frame name. In order to modify the postfix change the "%d" to i.e. "%04d" if you want the frames to have the format frame.0001.png.

Layers and Passes

See [Layers and Passes](#) section.

Region

See the [Region Rendering](#) page.

KeyShotXR Output

The *KeyShotXR* output option is available if the KeyShotXR Add-on is installed. It provides setup and output of a KeyShotXR as well as options for render layers and render passes.

Learn more about [KeyShot XR](#).

Most of the parameters set in the [KeyShotXR Wizard](#) can be edited in the KeyShotXR Render Output options. Additionally, there are other options for file format, file size, and iBooks output for viewing on iOS devices. There are also Advanced options for KeyShotXR control, customization and direct upload to a website via FTP.

Output Options

Name

Give the KeyShotXR a name. The frames will be located in a folder with the same name.

Folder

Set a destination folder the XR files. In this location the .html file will be added along side with a new folder containing all image files etc.

Viewing Resolution

Set the resolution

Format

Choose JPEG or PNG for the frames. Check Alpha if you want transparency on .png images.

File Size

Selecting the "Preview" button will render one frame from the KeyShotXR and has a compression slider that allows adjustments to the quality of the image, and updates in real-time. Be aware that a larger file size could increase the time to load the KeyShotXR in the browser.

Create iBooks Widget

If this is enabled, a HTML5 widget will be output in the same folder as your KeyShotXR which can be embedded in an iBook using [iBooks Author](#).

Learn more about [Embedding a KeyShotXR in iBooks](#).

KeyShotXR Control

Rotation Control

Environment

This option will set the center of rotation at the center of the scene.

Object

Select an object in the scene as a center of rotation.

Camera

On this page

- [Output Options](#)
- [KeyShotXR Control](#)
 - [Rotation Control](#)
 - [Smoothness Control](#)
 - [Angle Control](#)
- [Advanced](#)
- [Layers and Passes](#)

Name	LEGOTechnicConfigurator_XR		
Folder	/Library/Application Support/KeyShot8/Animations 		
Viewing Resolution	795	X	447
Format	PNG	☒ Alpha Channel	
File Size			80 Preview
☐ Create iBooks Widget			

Use the current camera settings to use as your rotation center.

Look At

Use your current “Look At” as your rotation center.

Custom

This option allows you to select the center of rotation from your scene tree items.

Horizontal Environment Rotation

Enable this option to have the environment rotate with the KeyShotXR.

Smoothness Control

Animation Frames

If animation is applied to the scene, you will be able to create a KeyShotXR from this animation. Additional parameters will be shown if enabled. See previous page for animation frames settings.

Horizontal Frames

This controls the number of frames in the “X” direction. The higher the number of frames, the more smoothly your model will rotate.

Vertical Frames

This controls the number of frames in the “Y” direction. The higher the number of frames the more smoothly your model will rotate.

Number of Images to be Rendered

This shows the number of images to render based on the number of horizontal and vertical frames.

Horizontal/Vertical Angle Increments

This shows the degrees between each frame. This value will change depending on the number of vertical and horizontal frames and the starting and ending angles.

Angle Control

This is equal to the custom setting of the [KeyShotXR Mode](#) in the wizard and controls possible viewing angles of KeyShotXR. If you want to use presets such as *Turntable*, *Spherical*, *Hemispherical* or *Tumble* use the wizard.

Horizontal

This controls the beginning and end of the rotation on the “X” plane.

Vertical

This controls the beginning and end of the rotation on the “Y” plane.

▼ KeyShotXR Control

Rotation Control

- ☐ Environment
- ☒ Object
- ☐ Panoramic Camera
- ☐ Camera Target
- ☐ Custom
- ☐ Horizontal Environment Rotation

Smoothness Control

- ☐ Animation Frames

Horizontal Frames

Vertical Frames

Number of Images to be Rendered 18

Horizontal Angle Increments 20.0

Vertical Angle Increments N/A

Angle Control

Horizontal Angle Begin

Horizontal Angle End

Vertical Angle Begin

Vertical Angle End

Advanced

Advanced settings for KeyShotXR are located in a drop-down menu on the same window as the custom settings. This menu controls how your KeyShotXR interacts in the web browser.

Rotation Damping

Increasing this value will increase the smoothness of the camera rotation when panning inside the web browser.

Mouse Sensitivity

This controls the overall mouse sensitivity in the KeyShotXR . Increasing this value will increase the model movement with less mouse movement.

Zoom-In

Enabling zoom-in will allow you to zoom into the KeyShotXR when inside the browser. Use the "Maximum Allowed Zoom-In Percent" slider to control the amount the user can zoom in your KeyShotXR.

Note: To ensure the browser page will scroll when the mouse scroll wheel is used while over the KeyShotXR, this option will need to be disabled.

Preserve Image Quality

Enable this option to render the frames at larger resolution for optimal image quality when zooming in. The image quality will be preserved when zooming in by enlarging the rendered frame resolution accordingly. This is separate from the viewport resolution setting for each frame. This will also increase the KeyShotXR file size.

Download on interaction

Enabling this option will set the KeyShotXR to only load the images into the browser after the user interacts with the KeyShotXR .

Allow Fullscreen Mode By Double-Click

Double-clicking the left mouse button will enter full-screen mode.

Show Loading Icon

Enabling this will allow the loading icon to be shown when the KeyShotXR is loading in the browser. This image can be changed by selecting "Browse" and browsing to the image file you prefer.

Name of Div

This defines the KeyShotXR section in the HTML code.

FTP Deployment

Enable this option to allow KeyShot to load the rendered KeyShotXR directly into your FTP address.

Confirm Before Deployment

When the KeyShotXR is finished rendering, you will be prompted to accept the deployment to the FTP site.

Generate Embeddable HTML Code

This will give you the code necessary for implementing your KeyShotXR in a website using the iframe tag.

Advanced

Rotation Damping96

Mouse Sensitivity100

☐ Zoom-In

Maximum Allowed Zoom-In Percent200

☒ Preserve image quality

☐ Download on interaction

☒ Allow Fullscreen Mode by Double-Click

☒ Show Loading Screen Default loading icon

Browse

Reset



Maximum Image Size: 80x80

Name Of DivKeyShotXR

☐ FTP Deployment

Embed FTP Settings in BIP File

This will save all the FTP credentials inside your KeyShot BIP file for easy deployment by another user.

Layers and Passes

See [Layers and Passes](#) section.

Configurator Output

The *Configurator* output option provides a series of still images and their accompanying *Metadata* of optional Model, Material, and Studio Variations that were setup via the [Configurator Wizard](#).

On this page

- [Output Options](#)
- [Layers and Passes](#)
- [Region](#)

Output

Options

Queue

Render

Still Image Animation KeyShotXR Configurator

Include

☒ Model Variations

☐ Material Variations

☐ Studio Variations

Images

5

Name

Folder

Format

PNG

☒ Include Alpha (Transparency)

Resolution

W:

H:

Presets

Print Size

W:

H:

inch

at

> Layers and Passes

> ☐ Region

Add to Queue

Render

Output Options

Include

This option allows you to specify which variations are included in the Configurator output.

Images

This value will display the total number of images to be output determined by the included variations. The value will update dynamically as the *Include* check-boxes are marked and unmarked.

Name

Set the file name of the render in the text field. If one is not entered, the default name will be the scene name. It is important to

keep the "%d" as this will add incremental post-fixes to each variation.

Folder

Choose where the render will be saved. Unless a specific folder is chosen, it will be saved in your default rendering-folder.

Format

Choose from JPG, TIF, EXR, TIF 32 Bit, PNG, PSD, and PSD 32 bit. All formats other than JPG can include an alpha channel.

Resolution

Set the resolution of the render. Type it in or select from the presets.

Print Size

If final output is for print quality, enter in the dimensions of the print size as well as the desired DPI. After size has been set, the resolution will update with the correct dimensions.

Layers and Passes

See [Layers and Passes](#) section.

Region

Select the *Region* render checkbox to enable rendering a smaller portion of your overall image. Rendering a smaller region speeds up the rendering time. This is useful when only a small change to one part of a scene is needed. After enabling region render, select and move the drag points to resize the region in the Real-time View window or enter a specific *Left* and *Top* location, or *Width* and *Height*. Note: Units are in pixels.

See the [Region Rendering](#) for more info.

Layers and Passes

KeyShot supports output of render layers and render passes. Render layers output specific parts and models assigned to layers, while a render pass outputs a specific attribute of the scene on its own layer. For example, a Lighting pass will output all the lighting on a single layer while a Shadow pass will output all the shadows on a single layer.

Output of layers and passes is used to separate out all the various aspects of the scene to provide more control in post processing operations. For example, you may want to adjust the intensity of light, shadows or a materials color. Having any of these on a separate layer gives you this control.

An image like the example below can be decomposed in individual render layers and render passes.



The model in this scene was created by [dk](#) and downloaded from GrabCAD

Render Layer Output

This option is only available if you have assigned parts and models to a render layer. Select *All Render Layers* checkbox to enable layer output. Select the gear icon  to show the *Render Layer Settings* dialog and select the *Alpha (Transparency) Mode* for the layers.

Alpha Modes

The Render Layer alpha modes include:

- **Straight Alpha - Unmatted** - (Default) This alpha mode extends the color at the edges of Render Layers to the semitransparent pixels of anti-aliased edges. This avoids any black fringing when

On this page

- [Render Layer Output](#)
 - [Alpha Modes](#)
 - [Render Layer example](#)
- [Render Pass Output](#)
 - [Diffuse Pass](#)
 - [Lighting Pass](#)
 - [Global Illumination Pass](#)
 - [Caustics Pass](#)
 - [Reflection Pass](#)
 - [Refraction Pass](#)
 - [Shadow Pass](#)
 - [Ambient Occlusion Pass](#)
 - [Clown Pass](#)
 - [Depth Pass](#)
 - [Normals Pass](#)
 - [Labels Pass](#)
- [Compositing examples with Render Passes](#)
 - [Reconstruct Beauty image from Passes](#)
 - [Adjust Beauty image with Passes](#)
- [Formats for Render Layers and Passes](#)

compositing the Render Layers in post-processing. This alpha type is the default, as it provides the best results in most situations.


- **Premultiplied Alpha - Matted with Black** - This alpha mode premultiplies the Render Layer image by blending or matting any semi-transparent pixels, due to anti-aliasing, with black. This can cause black fringing when compositing the Render Layers, if the image editing application does not support specifying the black matting color and adjusting for it. In Photoshop, the issue can be remedied by trying one of the matting options, found under Image > Matting.
- **Aliased - Opaque Fringe** - This alpha mode extends the color at the edges of Render Layers and creates fully opaque (aliased) edges. This avoids any transparent gaps between adjoining Render Layers when compositing the Render Layers in post-processing. Due to the negative visual consequences of aliased edges, this mode should only be used if gaps between Render Layers are a dealbreaker. Rendering at higher resolutions will make the aliasing less noticeable though.

The example below shows the Still Image rendering of two interlocking rings.



The outer (blue) and inner (white) rings were put on two separate Render Layers.

The examples below show the result for the different Alpha Modes when compositing the Render Layers on a solid green background color. Click the images to enlarge.

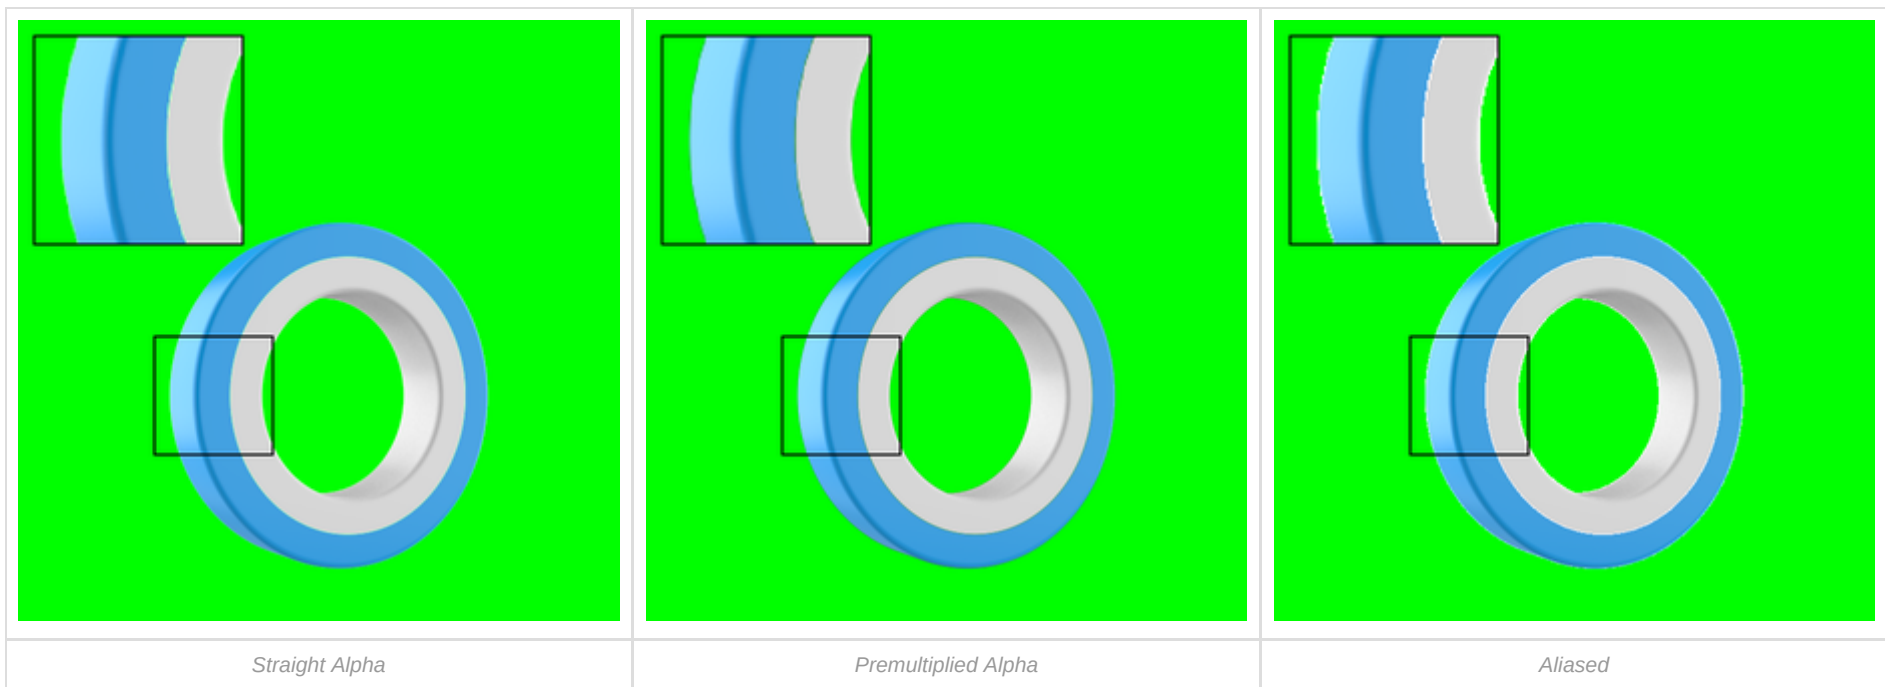

With "Straight Alpha - Unmatted" enabled, the Render Layer edges don't show fringing (black matting), and the green background color bleeds through the anti-aliased gap between the two Render Layers.

With "Premultiplied Alpha - Matted with Black" enabled, the Render Layer edges show black fringing, and the green background color bleeds through the anti-aliased gap between the two Render Layers.

With "Aliased - Opaque Fringe" enabled, the Render Layer edges show opaque and aliased fringing, and there is no gap between adjoining Render Layers, so that the green background color does not bleed through.

Note

Enabling the render layers option will render all render layers created. To create a render layer go to the Project window, Scene tab. Go Properties, Render Layer to create a render layer. Select a part or group of parts and select the render layer you would like it to be on.

Render Layer example

The examples below show the different render layers of above scene.

			
<i>Render Layer "Body Panels"</i>	<i>Render Layer "Black Parts"</i>	<i>Render Layer "Flames"</i>	<i>Render Layer "V"</i>

Render Pass Output

Select *All Render Passes* checkbox or the checkbox next to the individual pass type to enable pass output. Doing so will render the selected pass(es), along with the original image format specified on the output tab. Select the *PSD* or *PSD 32-bit* option from the *Format* drop-down menu to enable the *Add to PSD* checkbox. This will compile all your passes into a single PSD file.

Note


Render Passes are always saved as separate EXR files. This is done to allow maximum flexibility and quality in post-processing. Most modern image editing and compositing applications can work with EXR files.

Please note that when rendering to PSD (not 32-bit) with "Add to PSD" enabled, all Render Passes are embedded in a 8-bit PSD file. As a consequence, some information will be lost. If maximum flexibility is desired, PSD 32-bit should be used instead.

KeyShot supports 12 types of render pass output, including:

Diffuse Pass

The Diffuse pass creates an image containing the diffuse color of all materials in the scene, including Labels.

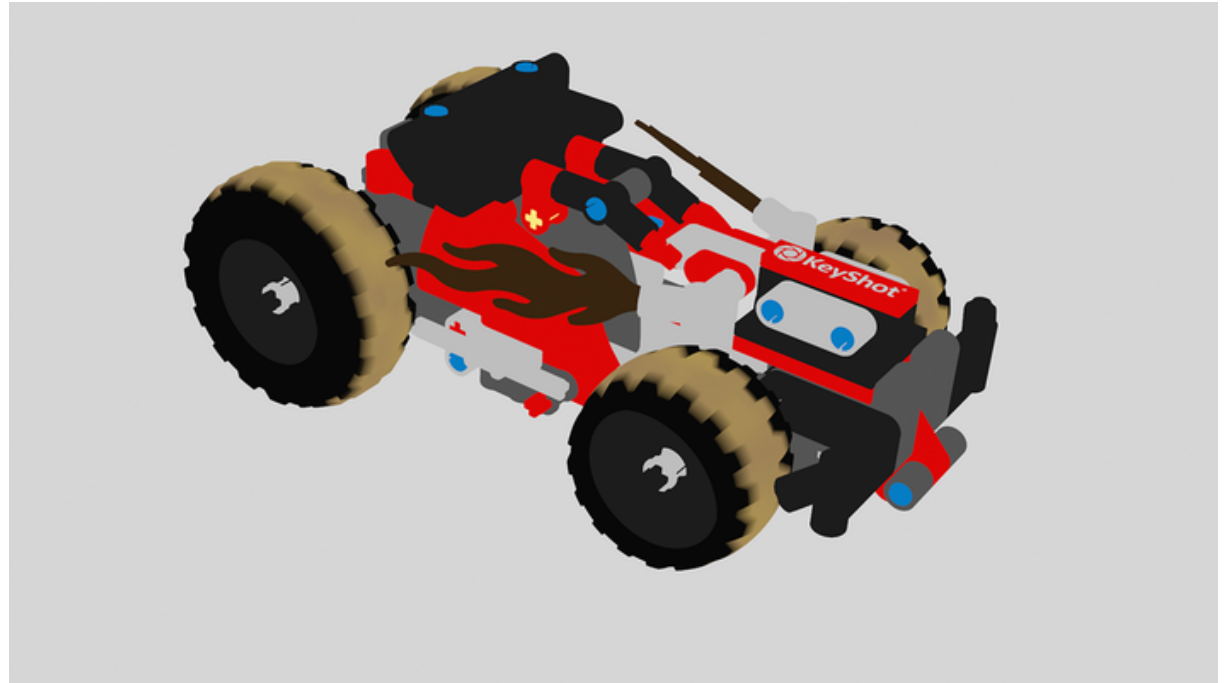

Lighting Pass

The Lighting pass creates an image containing only the direct component of the lighting in the scene. Furthermore, this pass is multiplied by the materials' diffuse color.



Global Illumination Pass

The Global Illumination pass creates an image containing only the indirect component of the lighting in the scene. Furthermore, this pass is multiplied by the materials' diffuse color.

Note:

When Global Illumination is disabled in the [Lighting](#) tab, the Global Illumination pass will result in a completely black image.




Caustics Pass

The Caustics pass creates an image containing the lighting from caustics in the scene.

Note

When Caustics is disabled in the [Lighting](#) tab, the Caustics pass will result in a completely black image.

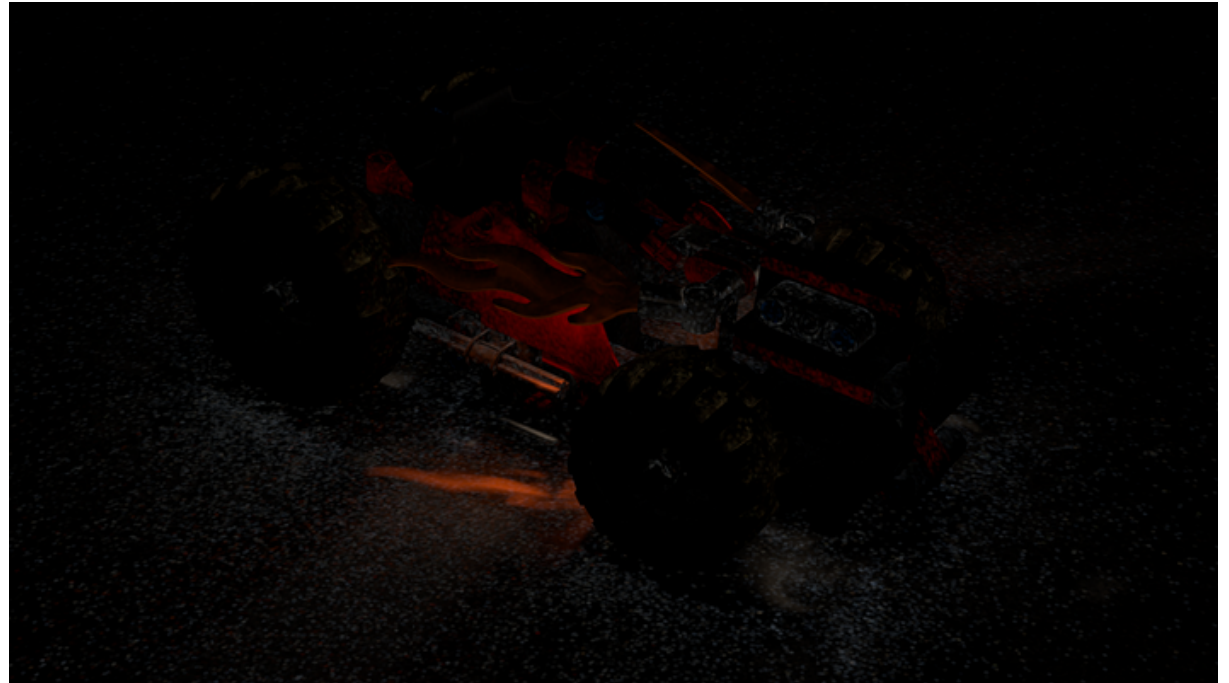

Reflection Pass

The Reflection pass creates an image containing the reflections of all reflective materials in the scene.


Note

The Reflection pass does not include the specular reflections of [Light Source](#) materials.




Refraction Pass

The Refraction pass creates an image containing the refractions of all refractive materials in the scene.

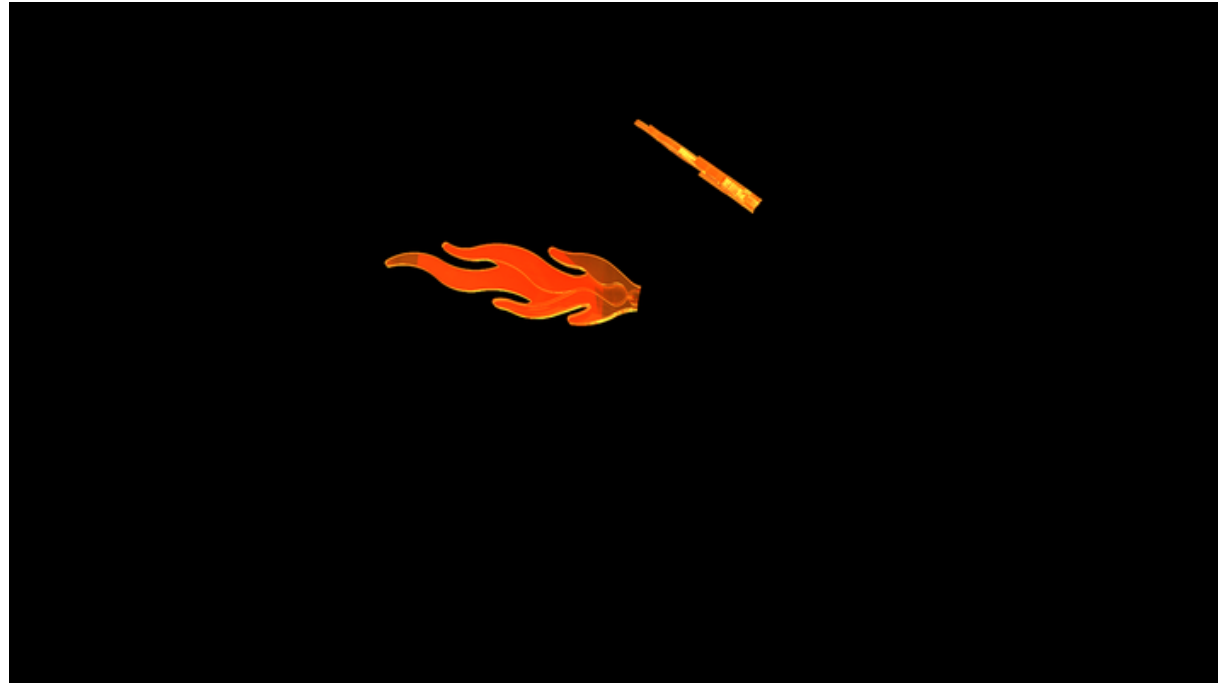


Shadow Pass

The Shadow pass creates an image containing shadows from all light sources in the scene, both HDRI lighting and physical lights (light source materials).

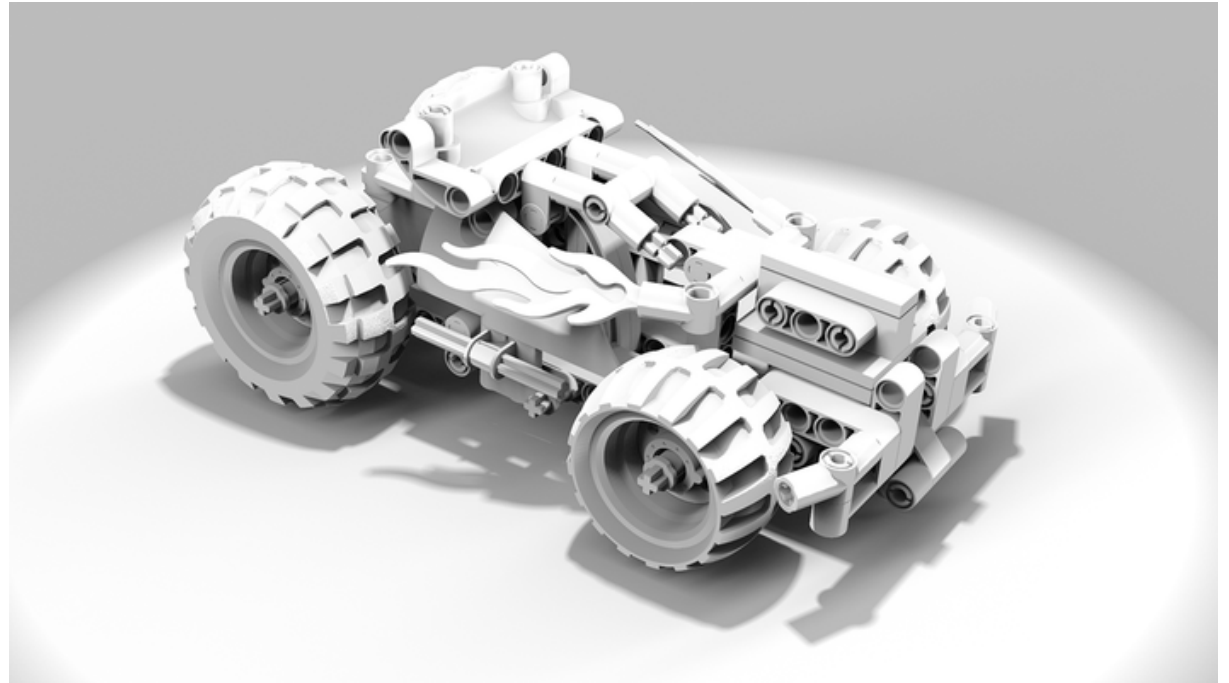

Ambient Occlusion Pass

The Ambient Occlusion pass creates an image where unoccluded surfaces are colored white, and occluded surfaces black. This pass can be used in compositing to accentuate crevices and internal model edges.

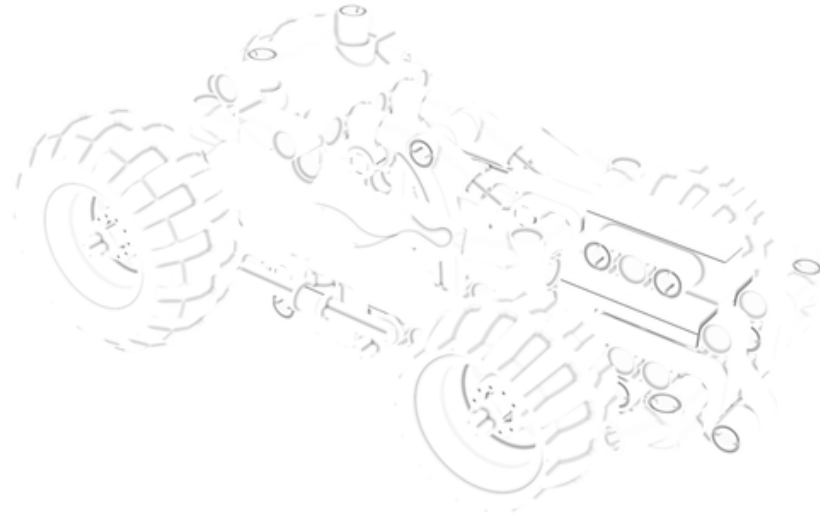


Clown Pass


The Clown Pass creates an image where each material is displayed as a flat color for easy selection and masking in an image editor or compositor. When the Clown Pass is enabled you have the option to "Separate Labels in Clown Pass" which can be accessed from the  icon.

Color differentiation follows these rules:

- Pure primary rgb colors are assigned first, then secondary colors, then tertiary.
- The colors are only distributed among objects that are set to show in the currently active Model Set(s).
- This means that the less materials that are active the better the clown results will be.

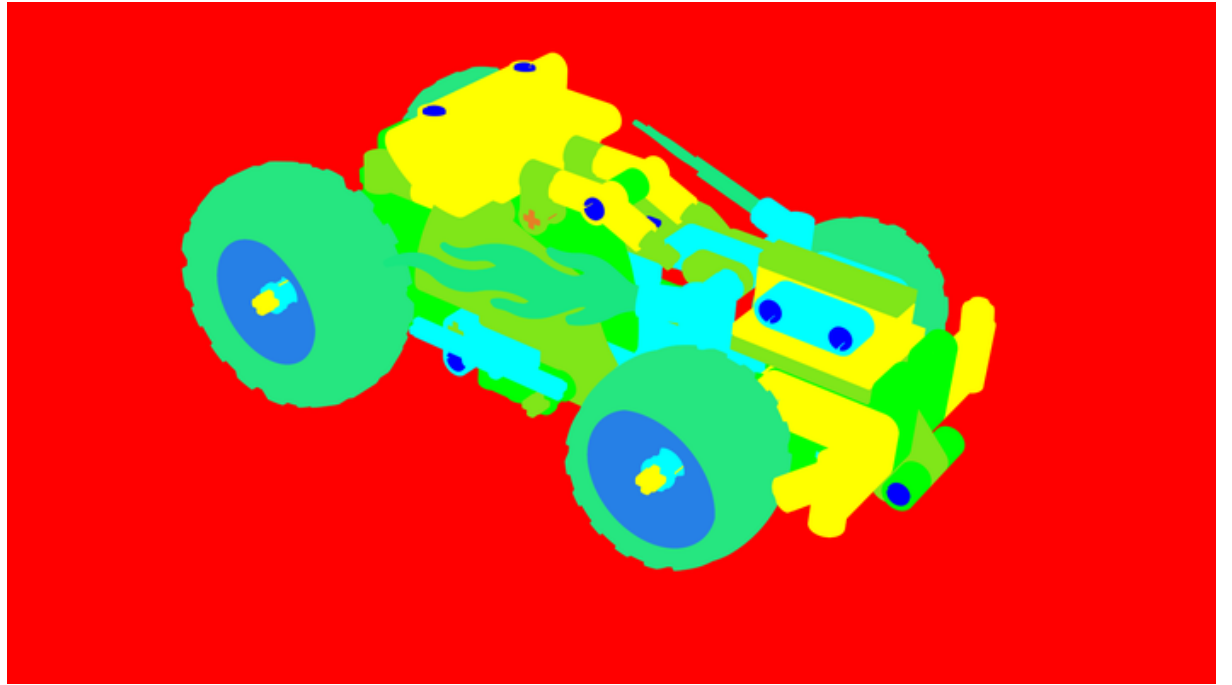

Clown Pass with "Separate Labels in Clown Pass" disabled (default)

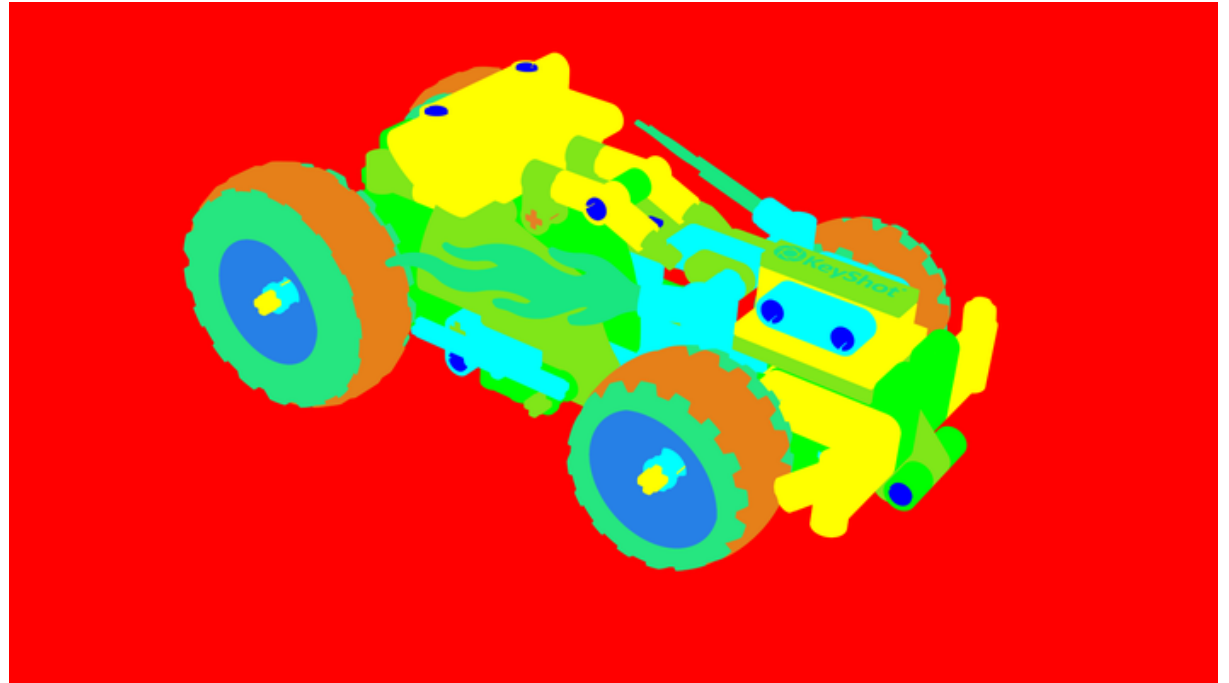


Clown Pass with "Separate Labels in Clown Pass" enabled

Depth Pass


The Depth pass creates a depth map, which is an image that contains information relating to the distance of surfaces to the camera. Depth maps are used in other applications like Adobe Photoshop and Adobe After effects to simulate effects like depth of field.

Tip

Since each pixel in the Depth pass represents an actual distance from the camera to the model surface, this pass might display with unexpected results in an image editor. Typically, the Depth pass will show as completely white. To reveal a greyscale image in Photoshop you can perform the following steps: Image > Adjustments > HDR Toning > Method: Equalize Histogram.



Depth Pass as displayed in an image editor (preview completely white)

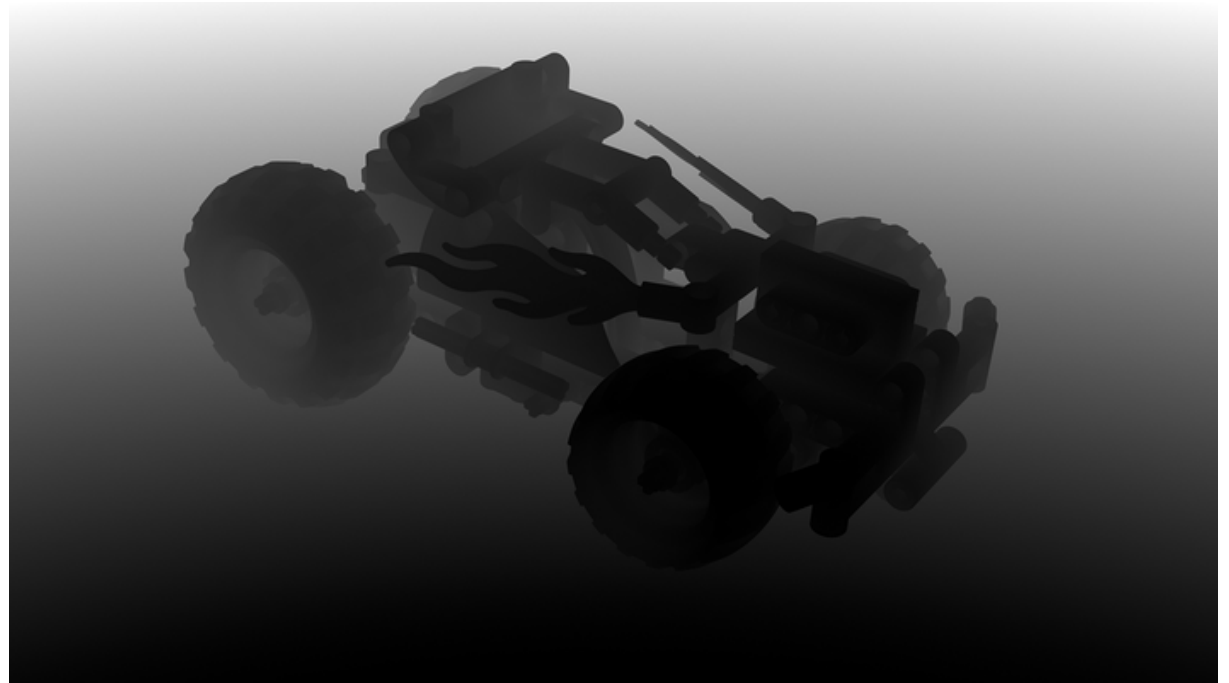

Depth Pass after equalizing the histogram

Normals Pass


The Normals pass creates an image where each pixel represents the geometry's orientation, using the surface normals in the scene. By default, the normals are generated in world space (relative to the scene). When the Normals Pass is enabled you have the option to enable "Camera Space

Normals" which can be accessed from the  icon.


A Normals pass can be helpful for quick relighting in post without having to rerender the scene.

Tip

A Normals pass with "Camera Space Normals" can directly be used as a normal map for bump on materials.

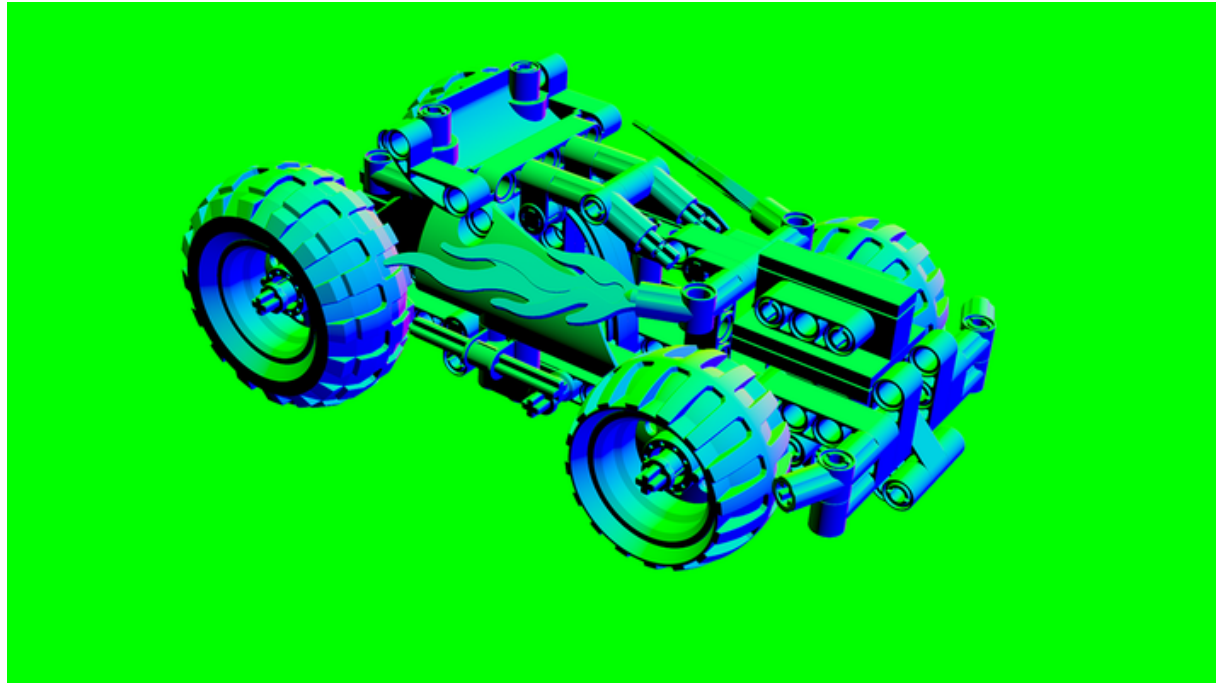

Normals Pass with "Camera Space Normals" disabled (default) - Normals are in World Space

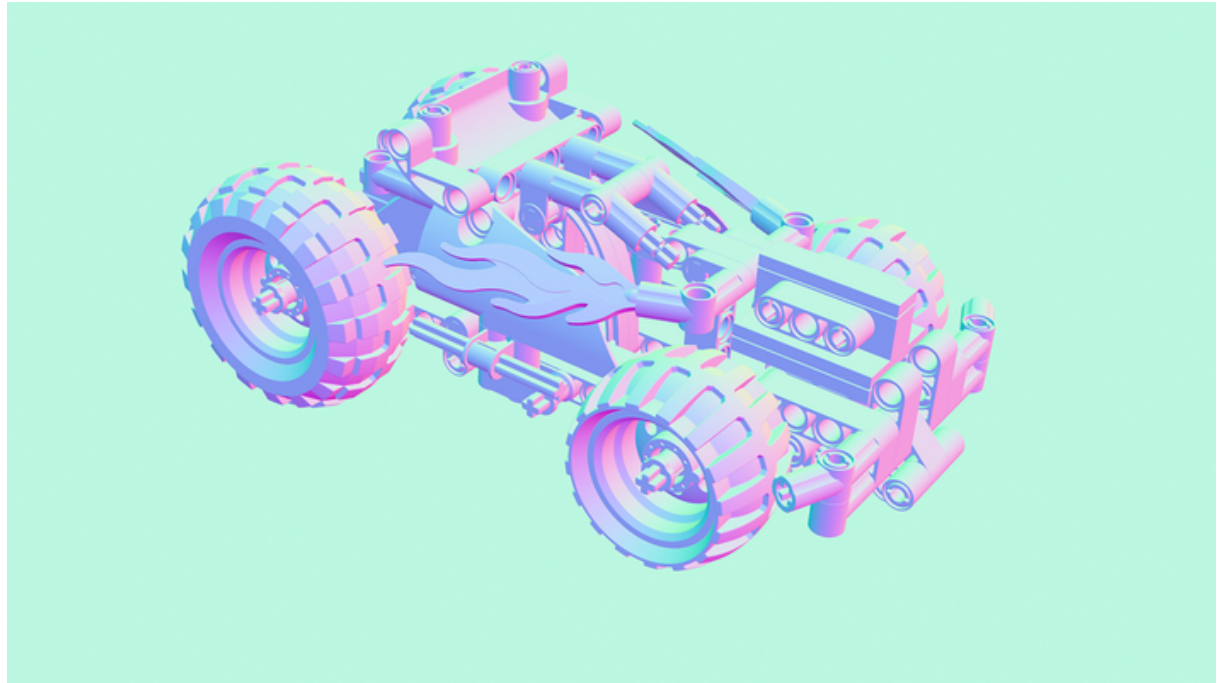

Normals Pass with "Camera Space Normals" enabled

Labels Pass

When this is enabled all Labels will be output on a single image with alpha.

Tip

A Clown pass with "Separate Labels in Clown Pass" enabled can be used to select or mask the individual Labels.



Compositing examples with Render Passes

Render Passes can be used in various ways during post-processing. Below are two basic examples of compositing workflows with Render Passes, using Photoshop to explain the concepts.


Note

Some discrepancies may exist between the rendered still image and a composite using Render Passes. Furthermore, Render Passes do not capture some of the more complex material effects like translucency (Translucent material).

Reconstruct Beauty image from Passes

Passes can be used to reconstruct the rendered still image, commonly called the "beauty pass" in compositing workflows. **Adding** together the **Lighting**, **Global Illumination**, **Caustics**, **Reflection** and **Refracti** on Passes allow to achieve the beauty image.

In Photoshop, adding is done by setting each pass layer's blending mode to "Linear Dodge (Add)".

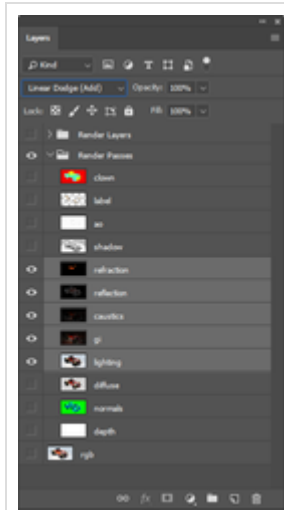

The pass layers with blending mode "Linear Dodge (Add)" in Photoshop



The composited result



The rendered still image (beauty pass) for reference

Adjust Beauty image with Passes

The same passes from the workflow above can also be used to strengthen or weaken their effect on the beauty image.

In Photoshop, strengthening the effect of a pass is done by setting the pass layer's blending mode to "Linear Dodge (Add)". Weakening the effect is done by setting the blending mode to "Subtract". In both cases, the beauty image should be the base layer, positioned below the passes.

The example below shows the effect of *adding the Reflection pass to the beauty image*.



The composited result: beauty + reflection



The rendered still image (beauty pass) for reference

The example below shows the effect of subtracting the Global Illumination pass from the beauty image.



The composited result: beauty - global illumination



The rendered still image (beauty pass) for reference

Formats for Render Layers and Passes

Below is an overview of the image formats of Render Layers and Passes for the different output formats.

Output Format	Render Layer Format	Render Pass Format
PNG	PNG	EXR
JPEG	PNG	
EXR	EXR	
TIFF	TIFF	
TIFF 32-bit	TIFF 32-bit	
PSD	<i>Last used format</i>	
PSD 32-bit	<i>Last used format</i>	

Notes

1. The Clown Pass is always saved as a separate PNG file (except for PSD and PSD 32-bit with "Add to PSD" enabled).
2. The Depth Pass is always saved as a separate EXR file (except for PSD 32-bit with "Add to PSD" enabled).
3. When rendering to PSD with "Add to PSD" checked, all Render Layers and Passes will be embedded in the PSD file.

Render Options

The Render Options window contains all settings for Render Mode, CPU Usage, and Render Quality. These options are specific for the Still Image, Animation and KeyShotXR output.

Mode

Default

The *Default* render mode simply allows you to render immediately after adjusting your render output settings or, if using KeyShot Pro, to send your render to the render queue.

Background (PRO)

The *Background* render mode option allows you to run the render in the background and continue working. Note: the Real-time View will be paused by default when the render is started. Select *Render* and un-check *Pause Real-time Render* to un-pause the Real-time View and continue working.

Send to Network

If you use [KeyShot Network Rendering](#), the *Send to Network* render mode allows you to send your render to the KeyShot Network Rendering Monitor. Make sure the Monitor is installed and running to send a job to be rendered on the network. Visit the [KeyShot Network Rendering Overview](#) for more information.

CPU Usage

For *Default* and *Background* render modes, the *CPU Usage* setting allows you to specify how many CPU cores you want to utilize for rendering your project. Selecting *Use Realtime CPU Settings* will use the *CPU Usage* settings defined on the *KeyShot Ribbon*.

Quality

KeyShot has three output options for quality based on your needs.

Maximum Samples



The *Maximum Samples* option controls how many times the image or animation frame will be calculated and refined. Each additional sample will further smooth out noise/grain in the image. This option uses the same rendering technique as you see when working in the Real-time View. (This technique is also used in *Maximum Time* option, but differs from the method used in *Custom Control* option.)

Samples

This controls how many times each pixel in the rendered image is calculated for increased accuracy. Too low of a value will result in an image that has excessive noise. Increasing samples will reduce the noise, however, increasing this setting too high will increase render times without a noticeable difference in quality.

On this page

- Mode
 - Default
 - Background (PRO)
 - Send to Network
- CPU Usage
- Quality
 - Maximum Samples
 - Maximum Time
 - Custom Control

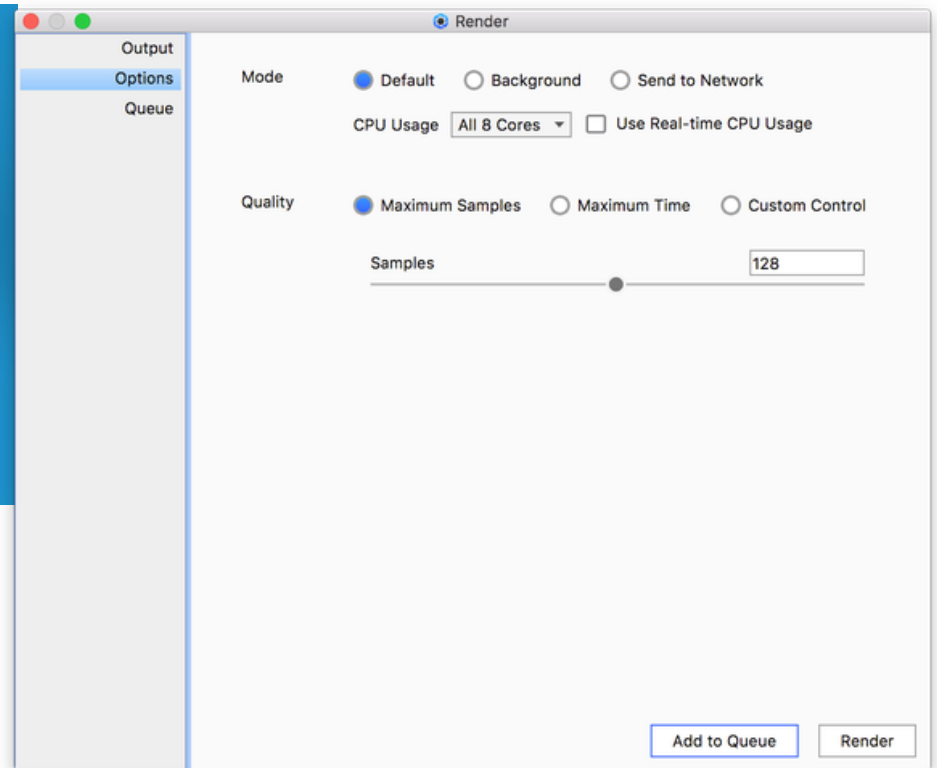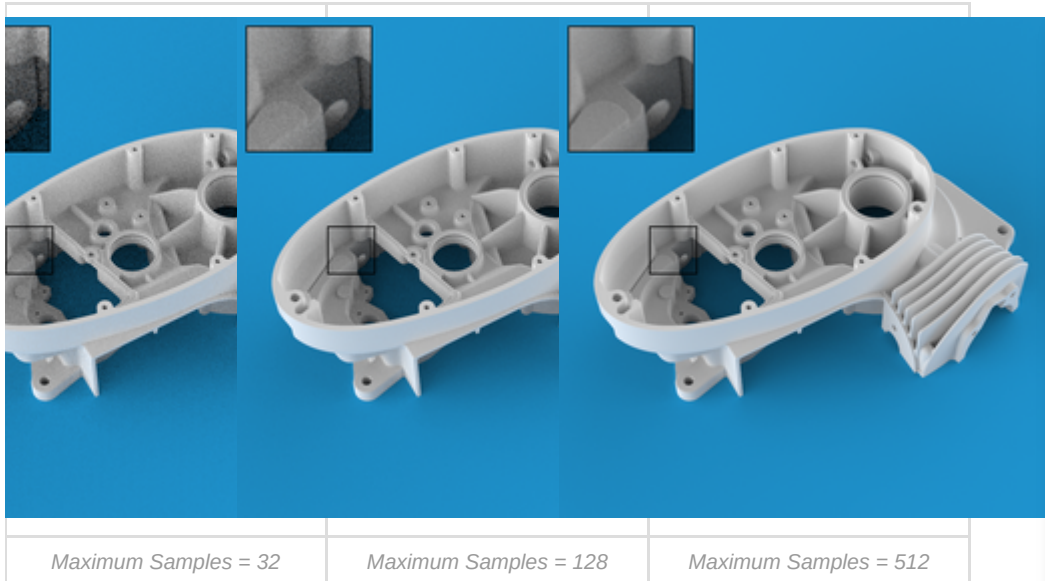

This video shows how to use the information in Heads Up Display when setting samples.

Samples Per Frame

The *Maximum Samples* option will read *Samples Per Frame* when the *Animation* tab is selected under the *Output* section. This option is ideal for animation output as it guarantees that each frame will be rendered at the same quality. Therefore, as the animation plays through the frames you will not see changes/flickering in shadows or noise patterns on materials.

How many samples should I use?

Generally speaking, a simple scene will require fewer samples and a scene with more complex lighting and materials will require more samples. Start low and increase the samples if you still see noise or the render looks grainy. Before rendering out an animation using Maximum Samples, test your samples with a still image render first.

Samples and Resolution

A sample calculates the color of a pixel. There is a point of diminishing returns where you increase samples past the point of added quality, and just increase the render time.


Something important to be aware of is that **as you increase the resolution of your image or animation, each pixel covers relatively less area of the image**. This means you can use a lower samples setting when rendering at higher resolutions. Note that this does not apply to rendering with area lights, caustics or interior mode as increasing samples while using those features will still increase the quality.

This method is typically preferred over the time-based output for animations, as some frames may require substantially more time to reach the same quality level as levels of detail and complexity change through the course of your animation. Using the time-based output will lead to more noise in the more complicated frames.

Maximum Time

The *Maximum Time* option for render quality will progressively refine the render for the amount of time set. This option uses the same rendering technique as what you see in the Real-time View. This technique is also used in Maximum Samples option, but differs from the method used in *Custom Control* option.


When rendering an animation, you may set the maximum time for each frame to render, or set a total duration for the entire animation.

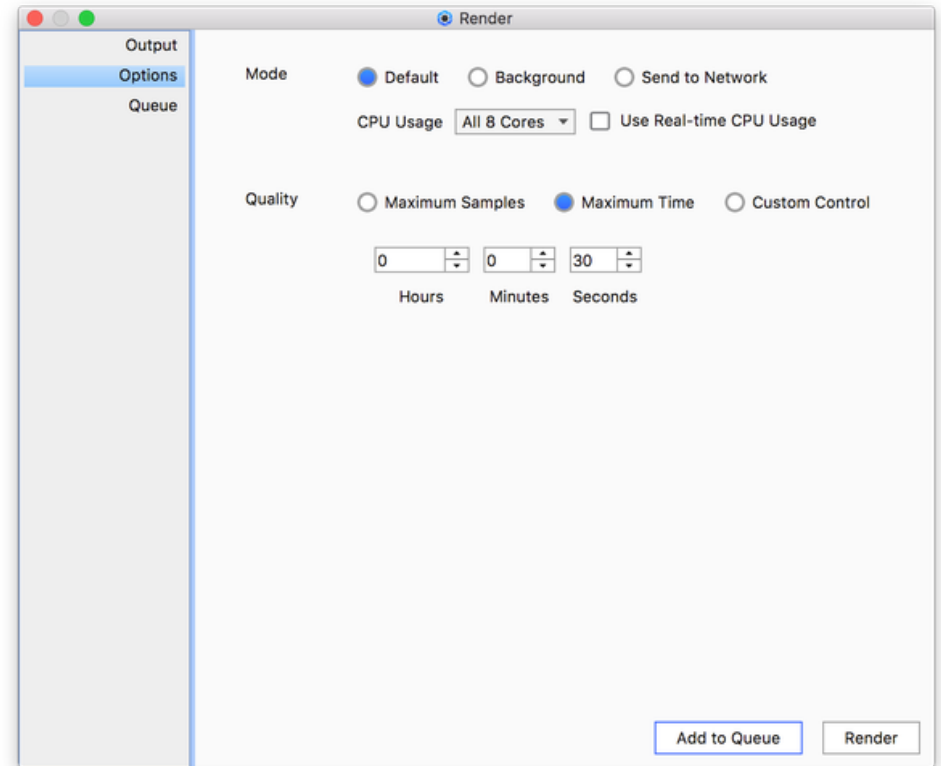

Custom Control

The *Custom Control* option allows control over all quality settings available in KeyShot. This mode typically produces smoother results in areas of high noise or shadow.

The example below shows a Custom Control rendering with a blue plastic material. Custom Control can be a good option for efficiently rendering noise-free images of scenes with diffuse materials like plastics.

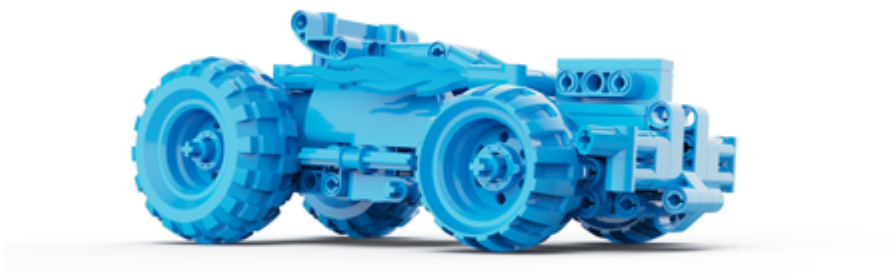

The model in this scene was created by [dk](#) and downloaded from GrabCAD

Samples

This will control the amount of rays per pixel that will be sent into the environment to gather information to determine that pixel's final shade. It is best to control this setting per material and set a value between 8 and 16 in the render settings.

For information on samples and setting samples per material, please see the [section on roughness and glossy samples](#).

Ray Bounces

Ray bounces are the number of times rays of light are calculated as they bounce around a scene. Ray bounces are initially set in the [Lighting](#) tab and any values entered there will be inherited by the *Render Dialog*. The value set in the Render Dialog is not however inherited by the lighting tab. this way you can adjust the amount of ray bounces for the specific rendering without affecting the general setting.


Learn more about Ray Bounces on the [Custom Lighting Preset](#) page.

Anti Aliasing

Anti aliasing is a method for smoothing out jagged edges that are created by pixels. Since pixels are made up of squares, they can produce a jagged look where edges meet. Anti aliasing smooths out these edges. In most cases, the default value of 1 is sufficient.


Increasing the anti aliasing quality can help to avoid artifacts that may occur when rendering with alpha (transparency) with objects having a very similar color to the background. For illustration, a synthetic example will be used.

The example below shows the Still Image rendering of a Flat material sphere with a Color Gradient texture whose color matches the background on one side.

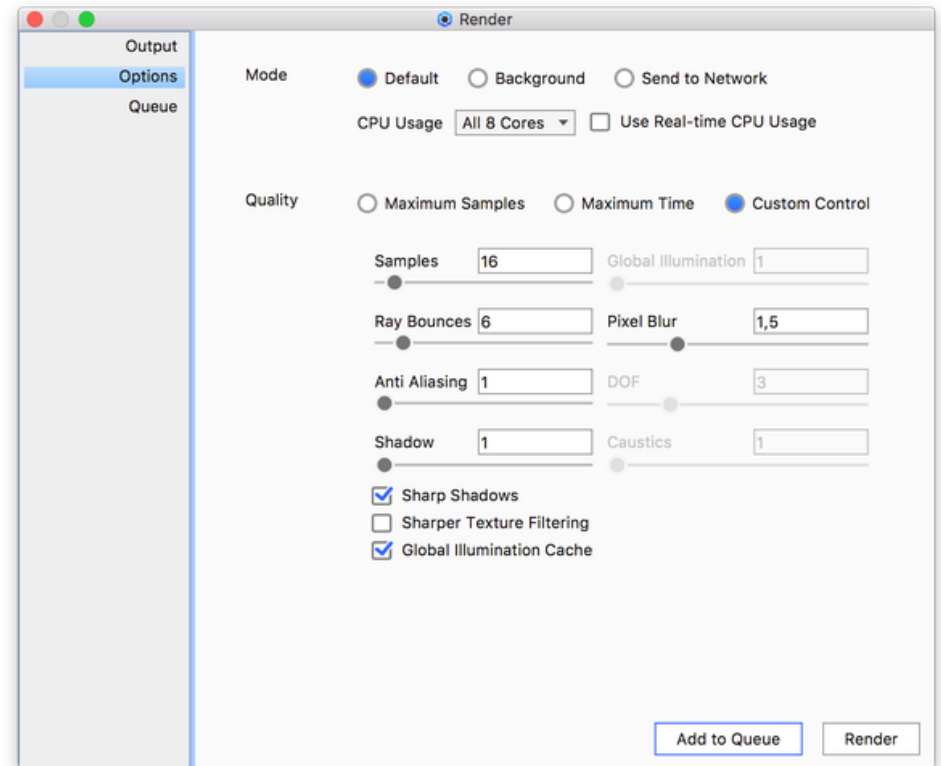



The examples below show composites of the transparent rendering on a solid black background color for an Anti Aliasing quality of 1 and 5. Click the images to enlarge.

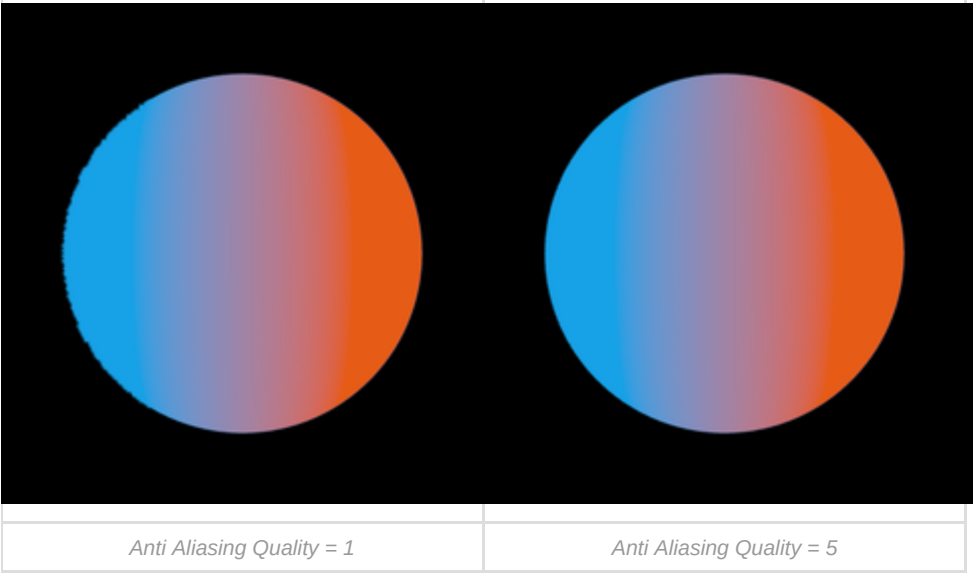


When the Anti Aliasing value is 1 the blue side of the sphere shows artifacts. These artifacts are absent when an Anti Aliasing quality of 5 is used.

Shadow Quality


Shadow quality will control the shadow quality for ground and object shadows. Note that increasing *Sh*

adow Quality dramatically increases render time. This setting will have most effect for bright diffuse materials, like for example white plastics.

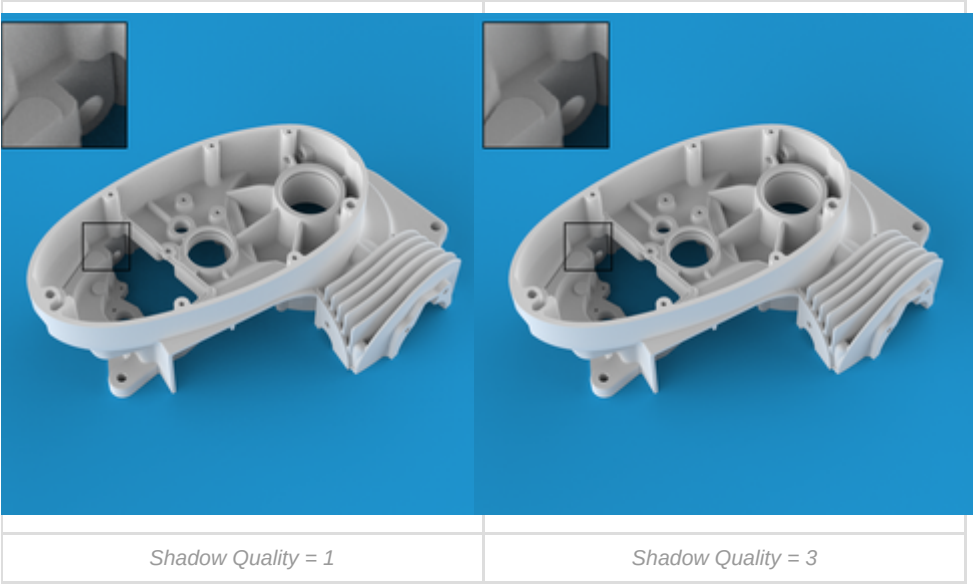

Global Illumination Quality


This will control the quality of all indirect light. Increasing this value can dramatically increase render time. It is rarely necessary to set a value above the default value of 1. If Global Illumination is turned off, this parameter will be grayed out. Global Illumination is enabled/disabled in the *Lighting* tap of the *Project* panel.

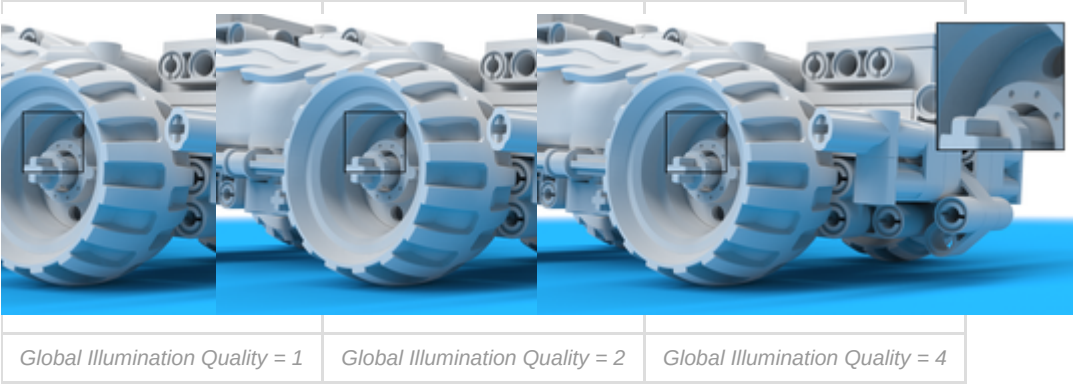

Pixel Blur


This will apply a slight blur to the image to reduce the overly sharp look that computer-generated

images can have. Higher values will have more blur. This does not increase render time. It is advised to leave this setting at the default value of 1.5. Higher values will cause low resolution images to look overly blurry, but can be used for high resolution renderings. A value of 1 disables pixel blurring.

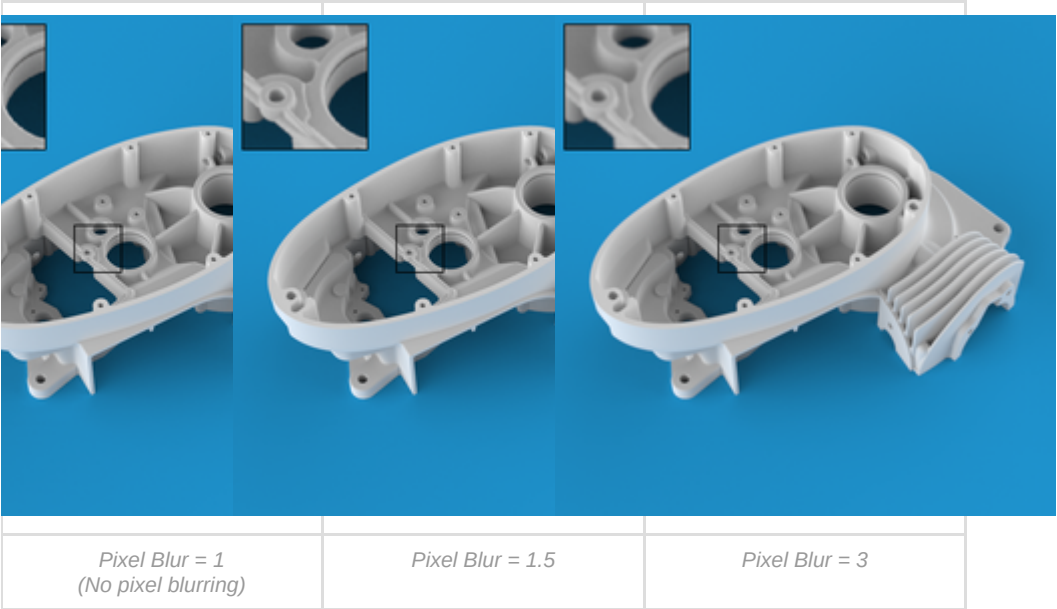

DOF (Depth of Field)


This will control the quality of depth of field if it is enabled in the camera tab. Increasing this value will have an effect on render time. For production quality a value between 3 – 5 is recommended. If Depth of Field is not activated, this parameter will be grayed out. Please see the section on cameras for more information on depth of field.

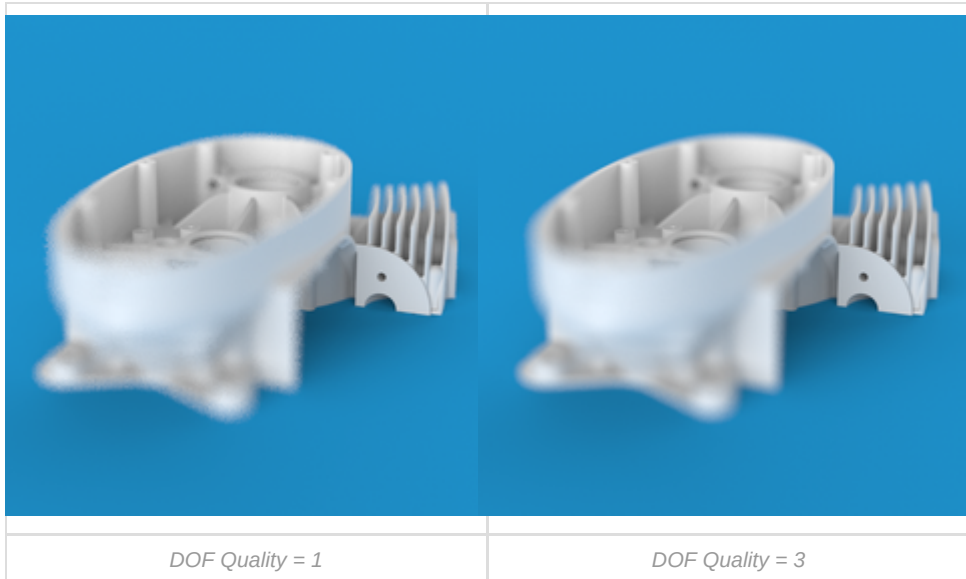

Caustics

Increasing this value will improve the samples and quality of the caustics. If caustics are not enabled, this parameter will be grayed out. You can enable caustics in the *Lighting* tab of the *Project Panel*. The maximum value that can be entered is 50. Increasing the value will increase memory consumption, and high values will require a lot of system memory. Please see the [Refractive Index](#) page for more information about caustics.


The examples below show the effect of increasing the Caustics quality for a scene with a *Solid Glass* material, lit by a *Spotlight*.

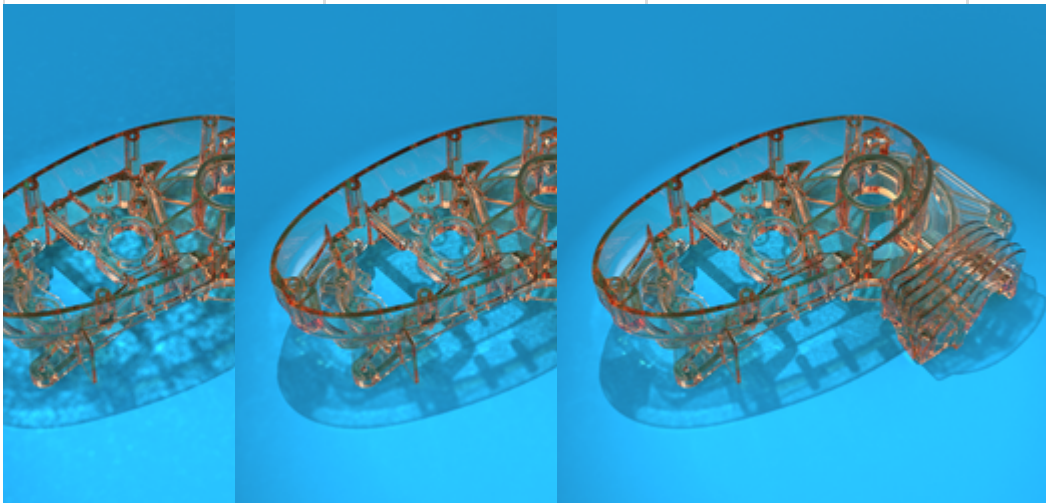

<i>Caustics Quality = 1</i>	<i>Caustics Quality = 10</i>	<i>Caustics Quality = 25</i>
-----------------------------	------------------------------	------------------------------

Sharp Shadows

This will allow sharp shadows to be cast across 3D geometry when the lighting scenario would create a sharp shadow. It is more accurate to have this checked and it is enabled by default. It is generally recommended to leave this on.

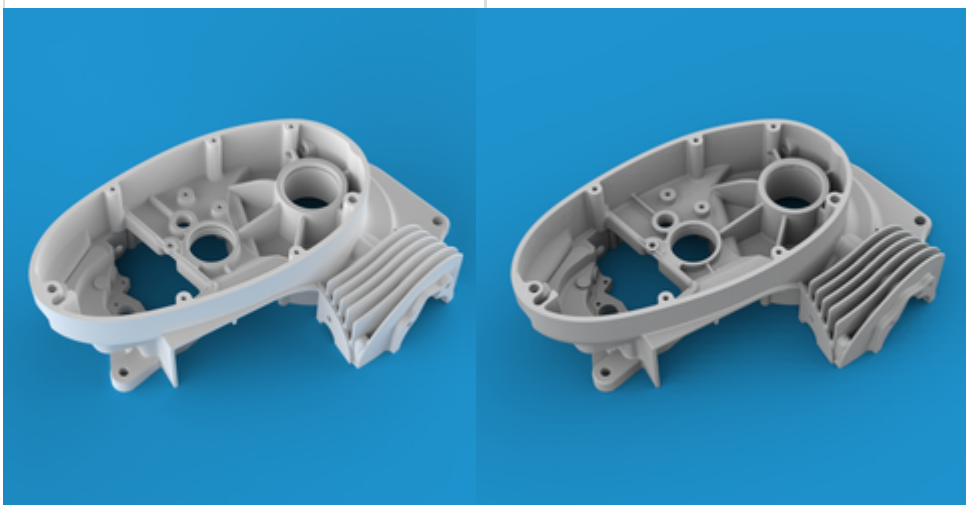

<i>Sharp Shadows = enabled</i>	<i>Sharp Shadows = disabled</i>
--------------------------------	---------------------------------


Sharper Texture Filtering

This will attempt to preserve detail in textures when viewed at grazing angles. For example, imagine being eye level with a wood table and seeing the wood grain compress together. Detail can get lost in the compressed areas. This setting reduces the loss of detail. This feature can increase render time so enable only when using textures with glancing angles.

Global Illumination Cache

Disabling Global Illumination Cache replaces the potential dirty shadows and black spots with noise. These artifacts can appear when the scene has transparent materials with diffuse surfaces behind them. Increasing Global Illumination Quality will reduce the noise. Increasing the Samples will also help in reducing the noise.

The examples below show the effect of toggling Global Illumination Cache for a scene with a Cloudy Plastic material.

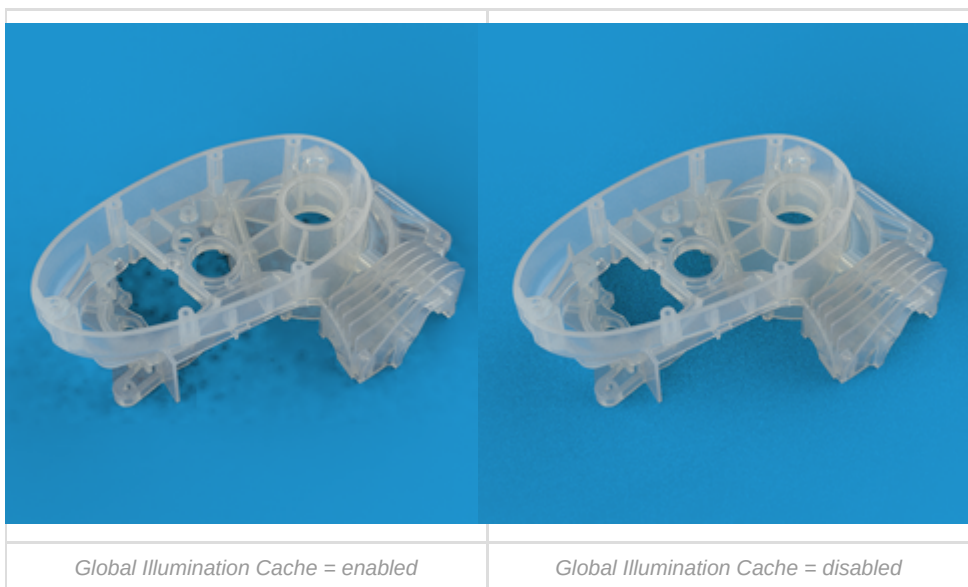


Limitation

Disabling Sharp Shadows for Custom Control also disables Global Illumination for rendering.

Render Queue

The Render *Queue* is used for batch processing your still image, animation, KeyShotXR, and Configurator rendering jobs.

The Queue list will display the job type, name, format, resolution, and frame count. You can hover over a job to see a larger thumbnail preview, when the job was added, the render mode and number of samples.

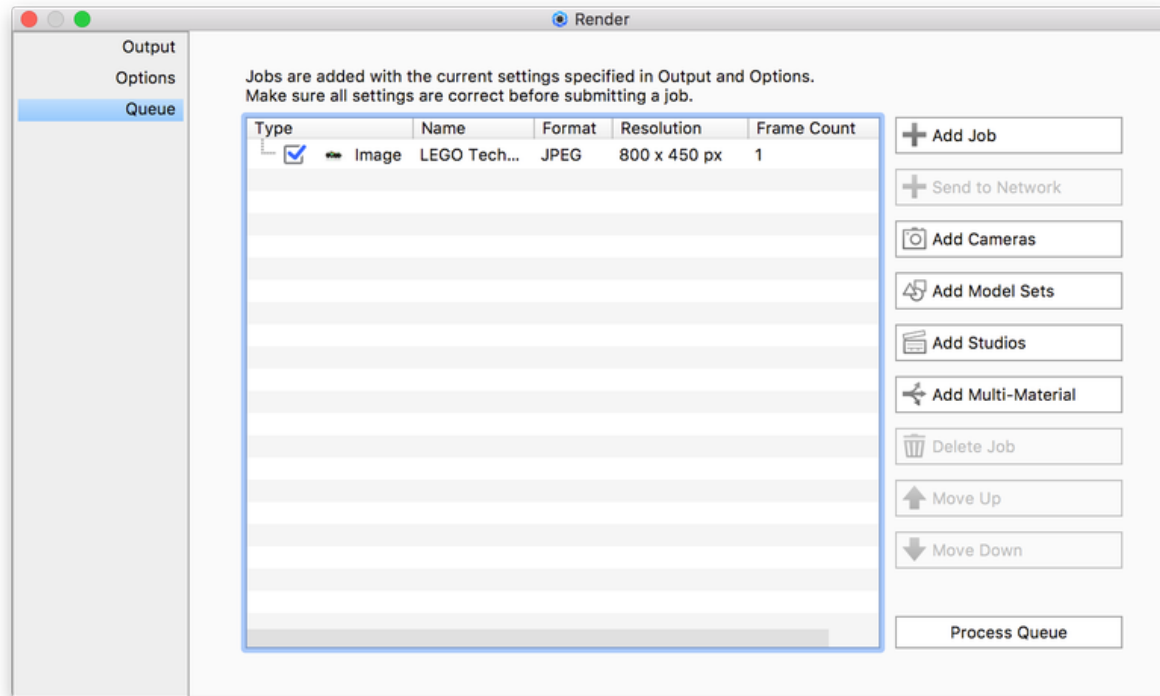

On this page

- [Add/Delete Job](#)
- [Send to Network](#)
- [Add ... to Queue](#)
- [Move Up/Down](#)
- [Process Queue](#)

Add/Delete Job

Use these buttons to add and remove jobs from the queue list. Jobs are added with the current settings specified in Output and Options. Each job can have unique settings.

Send to Network

If you have KeyShot Network Rendering installed, the option to *Send to Network* will become available. Select/highlight one or more jobs in the Queue and click the *Send to Network* button.

Add ... to Queue

Add Cameras


Send saved Cameras to the Render Queue. This button is active if more than one Camera exists. Click the *Add Cameras* button to open the Camera Queue window and check the Cameras you want to add to the queue.

Add Model Sets

Send saved Model Sets to the Render Queue. This button is active if more than one Model Set exists. Click the *Add Model Sets* button to open the Model Sets Queue window and check the Model Sets you want to add to the queue.


Add Studios

Send saved Studios to the Render Queue. This button is active if more than one Studio exists. Click the *Add Studios* button to open the Studios Queue window and check the Studios you want to add to the queue.

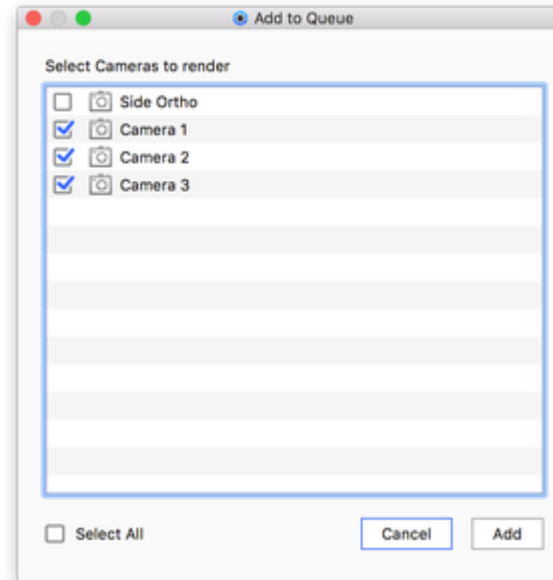

Add Multi-Material

Send all sub-materials of a selected Multi-Material to the Render Queue. This button is active if one or more Multi-materials exist in a scene. Click the *Add Multi-Material* button to open the Multi-Material Queue window and select which variant of each Multi-Material you want to add to the Queue.

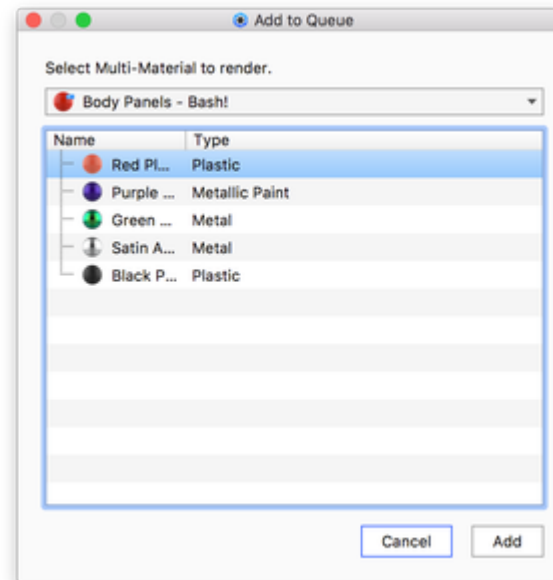

Move Up/Down

You can select a job in the list and click *Move Up* or *Move Down* to change the order of the job in the list. Jobs at the top render first. You can use the check box next to the job to turn off that job. The job will then be skipped during processing of the queue.

Process Queue

When you are ready to start the queue, click the *Process Queue* button. All jobs with a blue check-mark will be processed. You can enable/disable a multi-selection of jobs via the right-click menu.

Render Output Window (image editor)

The Render Output window shows the progress of the rendering based on the Render settings selected. This window also provides options for applying image adjustments while the image is being rendered that can be saved out when the render is complete.

Close

While the rendering is still in progress you can abort by clicking the red x  this will give you the option to save the rendering at the current state or discard the image. When the rendering is finished the image is automatically saved in the selected location. Click the green check-mark  to close the render output window.

CAUTION: all unsaved adjustments made in the adjustments panel will be lost. Be sure to save your render after making adjustments before closing the render output window.



Save image to file

Select the Save icon  to save the current render as it appears in the Render Output window.



Hide/Show Image Styles Panel

Toggles the Image Styles panel. Here existing Image Style may be applied or new Image Styles created. Refer to [Image Styles](#) for more on how to create and apply image adjustments.



Zoom to fit

Fits the Image to the size of the view-port.



Zoom to 100%

Zooms the image to its full size regardless of the size of the view-port.

Zoom slider

When the view-port is smaller than the full size of the image, the slider allows incremental zooming the image between fitting the view-port and full size.

Region Rendering

When working on scenes in KeyShot with complex lighting or materials, you may notice the Real-time View can take longer to resolve. Real-Time Region Render can help maintain a fast workflow by allowing to render specific regions of your scene in real-time.


To initiate Real-Time Region Rendering click the  Region Rendering icon in the *Ribbon*.

The smaller the Real-time Region is, the faster the image will resolve, allowing you to maintain that speedy workflow.

Set up Render Region

When the Region Rendering is enabled you can control the region in 2 ways:

- Drag the corners of the region render box to set the size and drag the entire region by click+drag inside the region. To move the camera click+drag in the black area.
- Set the size and position by entering the height/width and distance from the top-left corner. The panel can be dragged to any position you want inside the Real-Time View.

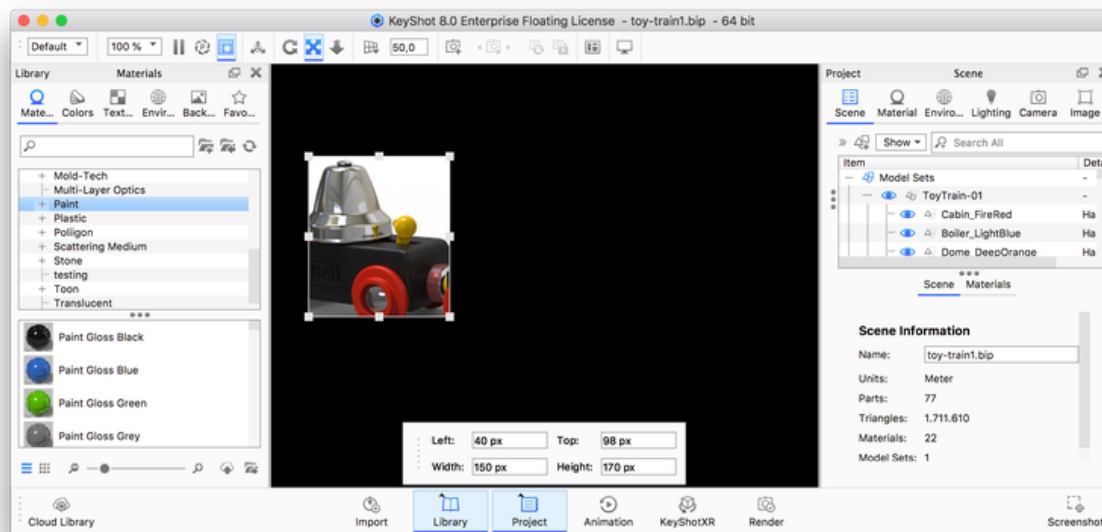

Realtime Window
1 Sample at 10 seconds

Realtime Region Rendering
3 Samples at 10 seconds

Side-by-side comparison of a layered glass material with and without enabling Real-time Region Rendering below. In this example, the Region render image resolves 300% faster.

When it's time to start your final render, be sure to disable  Region Rendering icon in the *Ribbon* or uncheck the Region Render box in the Render Dialog if you want to render the extents of the Real-time View.

KeyShot is known for being a tool that offers great results in very little time. Real-time Region Rendering is one of the many features that allows you to maximize your creative output and reduce the time it takes to produce that final shot.

Scripting


Scripting allows you to unleash the power of KeyShot for automation, batch processing and more. Scripting functionality includes control for camera, lighting presets, materials and material templates, environment, background and backplates, rendering (images, animations, and XR) and opening, saving and importing files.

KeyShot scripting uses Python 3.6. To access the *Scripting* console go to *Window, Scripting Console*. You can use KeyShot's predefined scripts or create your own custom scripts inside the *Scripts* tab. You can also input one-line commands inside the python interpreter, located at the bottom of the *Console* tab.

For additional documentation that includes a [quick start guide](#), click here.


In this section

- [Script Location](#)
- [Creating A Script](#)
- [Script Examples](#)

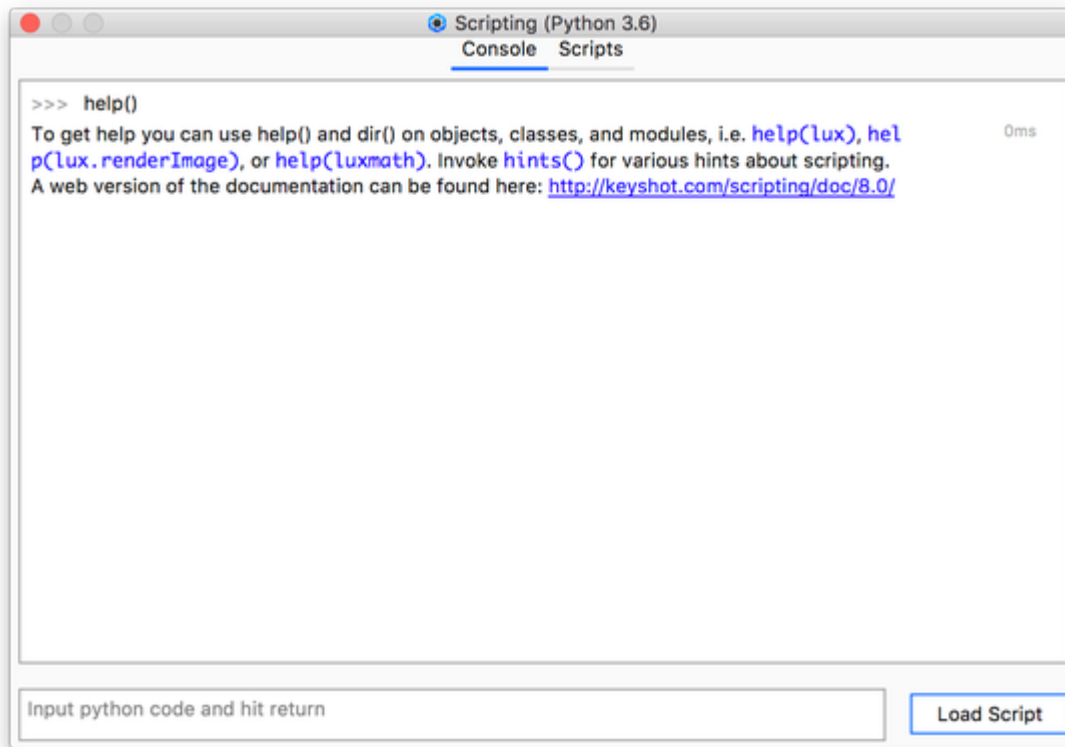

Script Location

Scripts are located in the KeyShot Resource folder, e.g. \KeyShot 8\Scripts. To change this location or add another location, select *Edit, Preferences, Folders* and change the path for the *Scripts* folder. Scripts in the folder will be visible in the *Scripts* tab of the *Scripting* window.

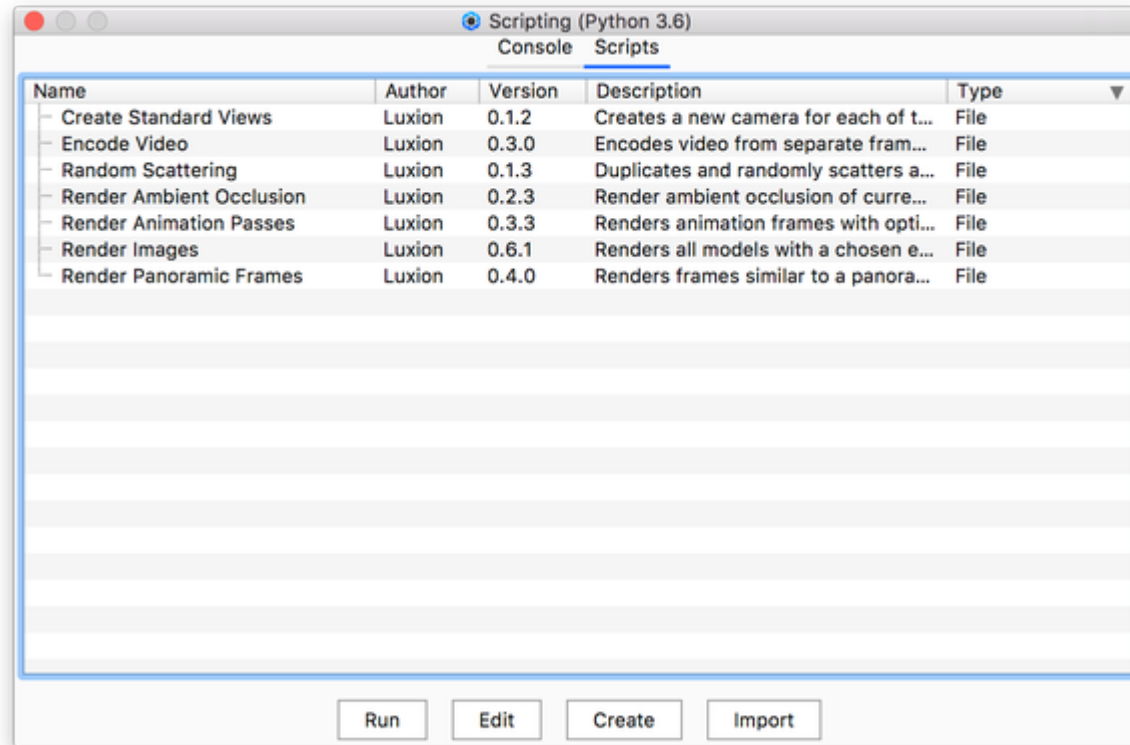


Creating A Script

To create a script, select *Create* from the *Scripts* tab. Provide a name for the script and the author.


If Python 3.6 is installed locally on the machine, then KeyShot will detect Python and all of the installed modules, such as NumPy, SciPy, PIL, etc., that can then be freely used for scripting in KeyShot (this can be disabled in the *General* preferences section). You may also import a script or edit an existing script using the corresponding buttons on the *Scripts* tab.

Vector and matrix classes are made available in the `luxmath` module to help with doing calculations. They are named `luxmath.Vector` and `luxmath.Matrix` respectively.

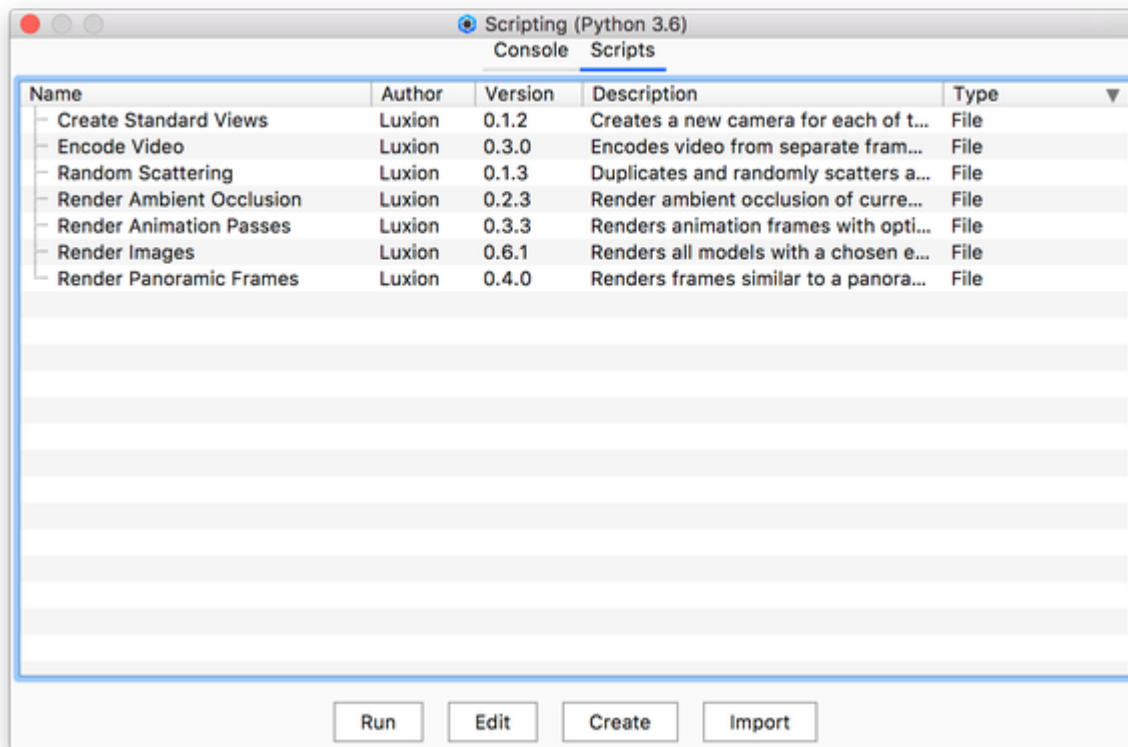

Script Examples

In this page you will find KeyShot's predefined scripts and instructions on how to use them. These scripts are listed under the *Scripts* tab inside the *Scripting* window.

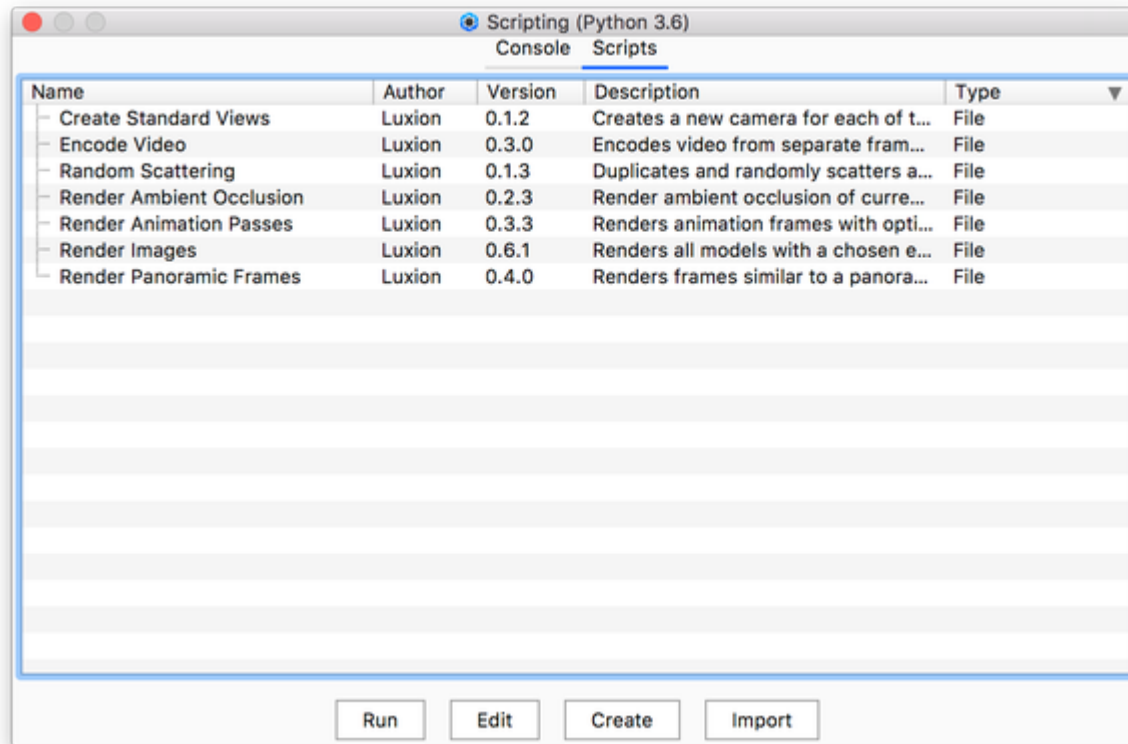

On this page

- [Create Standard Views](#)
- [Encode Video](#)
- [Render Ambient Occlusion](#)
- [Render Animation Passes](#)
- [Render Images](#)
- [Render Panoramic Frames](#)

Create Standard Views

Creates seven standard view cameras: front, back, top, bottom, left, right, and isometric.

How to use:

- Select script and press Run. You will receive confirmation message: *Successful!*
- Click OK.
- You will find the seven standard views under *Project > Camera*.

Encode Video

Encodes video using an image sequence over a specific range of frames.

How to use:

- Select script and press Run. The user prompt appears.
- Click the browse button and select a folder with the image frames.
- For frame format, copy the name of the file, replacing the frame number with %d, e.g. my_new_animation.%d.jpg.
- Enter the start frame – the number in the name of the first image, e.g. 1 on my_new_animation.0001.jpg.
- Enter the end frame – the number in the name of the last image, e.g. 60 on my_new_animation.0060.jpg.
- Enter FPS for the video.
- Enter the video name.
- Click OK to begin the process.

Render Ambient Occlusion

Renders an ambient occlusion pass of your scene.

How to use:

- Select script and press Run. The user prompt appears.
- Click the browse button and if you wish to change your output folder.
- Set the output image name.
- Set the output width and height.
- Set the render time. The default value is 20 seconds. Increase the render time better quality.
- Add to queue should be enabled if you wish to add your job to the local render queue. Otherwise your job will be rendered according to your render mode options: default, background, or network.
- Decide if you wish to process your local queue after adding the job. If you disabled the "Add to queue" checkbox, then this box should also be disabled.
- Click OK to begin the process.

Render Animation Passes

Renders your animation frames with the option to output "ambient occlusion" and/or "toon outline shading" passes. Please note that in order to run this script, you must first apply animations to your scene.*

How to use:

- Select script and press Run. The user prompt appears.
- Click the browse button and if you wish to change your output folder.
- Set the output file format. KeyShot uses %d to keep track of the frame number and you should leave this symbol in the name (e.g. my_new_animation.%d.jpg).
- Set the output width and height.
- Enter the start frame – the number in the name of the first image, e.g. 1 on my_new_animation.0001.jpg.
- Enter the end frame – the number in the name of the last image, e.g. 60 on my_new_animation.0060.jpg.
- Select the passes that you wish to render.
- Add to queue should be enabled if you wish to add your job to the local render queue. Otherwise your job will be rendered according to your render mode options: default, background, or network.
- Decide if you wish to process your local queue after adding the job. If you disabled the "Add to queue" checkbox, then this box should also be disabled.
- Click OK to begin the process.

Render Images

Imports all CAD files within a folder and renders them one at a time. This script can be used to render an animation from an obj file sequence. Once your images are rendered, you may stitch them up and compile the video with the Encode Video script above.

How to use:

- Select script and press Run. The user prompt appears.
- Click the browse button and select the folder with the geometry (.obj) sequence.
- For input, type the extension of the geometry without the dot (obj).
- For output, type the extension of the image format without the dot (png).
- Input the width and height of the output images in pixels.
- If you created a material template for automatic material assignment, then select your template. Otherwise, use "None".
- Click OK to begin the process.

Render Panoramic Frames

Renders a series of frames that can be used to create a panoramic view of the product (that is, 360 degrees along the vertical axis Y). Once your images are rendered, you may stitch them up and compile the video with the Encode Video script above.

How to use:

- Select script and press Run. The user prompt appears.
- Select which camera you'd like to use. The center of the camera will be the pivot of rotation.
- Set the number of frames to render. The default number of frames is 50. Since the camera rotates a full 360 degrees, this comes out to about 7 degrees per frame (360 / 50).
- Set the output file format. KeyShot uses %d to keep track of the frame number and you should leave this symbol in the name (e.g. my_new_animation.%d.jpg).
- Click the browse button and if you wish to change your output folder.
- Set the output width and height.
- Add to queue should be enabled if you wish to add your job to the local render queue. Otherwise your job will be rendered according to your render mode options: default, background, or network.
- Decide if you wish to process your local queue after adding the job. If you disabled the "Add to queue" checkbox, then this box should also be disabled.
- Choose the direction of rotation: clockwise (checkbox ON) or counterclockwise (checkbox OFF).
- Click OK to begin the process.

*Animation is only available in KeyShot Pro edition.

Animation

KeyShot Animation allows you to animate your models, materials and cameras in no time.


To translate a part across the scene, simply right-click the part in the scene tree, select *Animation > Translation*, and tweak the animation settings. Similarly, to animate a camera: right-click a camera in the scene tree, select your animation type, and make the desired changes.

You may also launch the Animation Wizard (*Animation > Animation Wizard*) and follow the prompts.

Animations in KeyShot are represented by rectangular nodes in the animation timeline. Each node has a start time (left side), an end time (right side) and a duration (the rectangle's length). You may move them around, scale them, stack them, or line them up in sequence to achieve different effects.

In this section

- [Animation Types](#)
 - [Part Animations](#)
 - [Material Animations](#)
 - [Camera Animations](#)
- [Animation Wizard](#)
- [Working with Animations](#)
- [Deformation Animations](#)
- [Animation Effects](#)
 - [Motion Blur](#)
 - [Motion Ease](#)

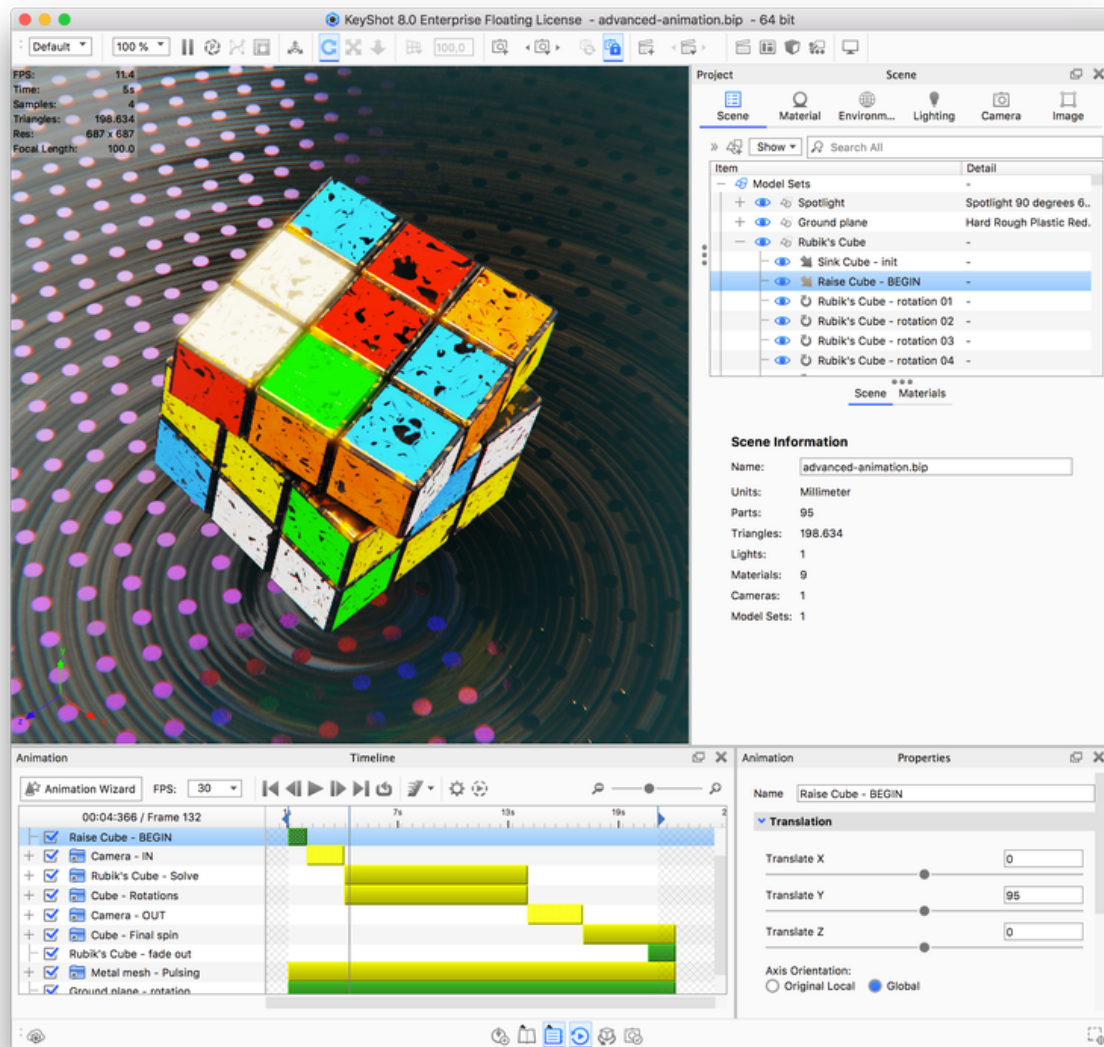

Animation Types

Types

Part Animations

Part animations affect your model's position, orientation, and visibility in the scene. [See Part animation types here.](#)

Material Animations

Material Animations enables you to create animations of a material's value based or color properties. [See Material animation types here.](#)

Camera Animations


With camera animations you can animate as well as switch between cameras. [See the Camera animation types here.](#)

Timeline appearance

Each animation type will appear with a color in the Animation timeline.

- Part animation are green.
- Material animations are red.
- Camera animations and switch events are blue.

Furthermore you can add folders to structure your animations, these are yellow in the timeline.

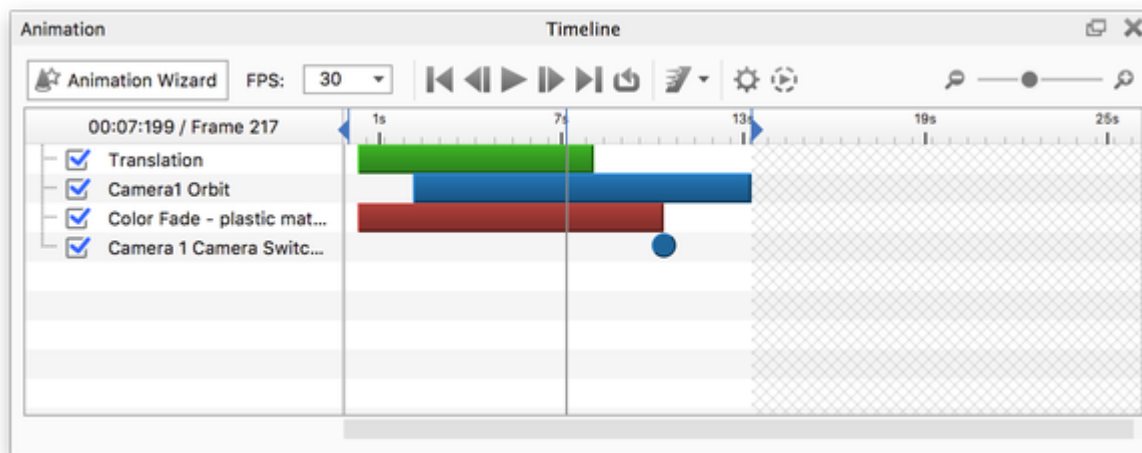

Time Settings

On this page

- Types
 - Part Animations
 - Material Animations
 - Camera Animations
- Timeline appearance
- Time Settings

Common for all animation types are the *Time Settings*, where you can control the timing and duration of your animation.

Motion Ease

Select if you want to add motion ease to the animation - see the [Motion Ease](#) types.

Start

Set the start time for the animation

End

Set the end time for the animation

Duration

the duration will automatically be calculated from the *Start* and *End* time. Alternatively you can enter the *Duration* and *Start* time - This will automatically fill the *End* time.

Time Settings

Motion Ease

Linear

Start

0 m

5 s

0 ms

End

0 m

10 s

0 ms

Duration

0 m

5 s

0 ms


Part Animations

Part animations affect your model's position, orientation, and visibility in the scene. They allow you to translate, rotate, and fade all while maintaining your model's hierarchy. Thus, animations applied to your model's top assembly will also affect all parts under that assembly.

Adding a Part animation

To add a part animation right-click the part or group you want to animate, select *Animation* and the desired animation type. Or use the [Animation Wizard](#) to help you set up the animation.

The part animation is represented as an green node in the timeline.

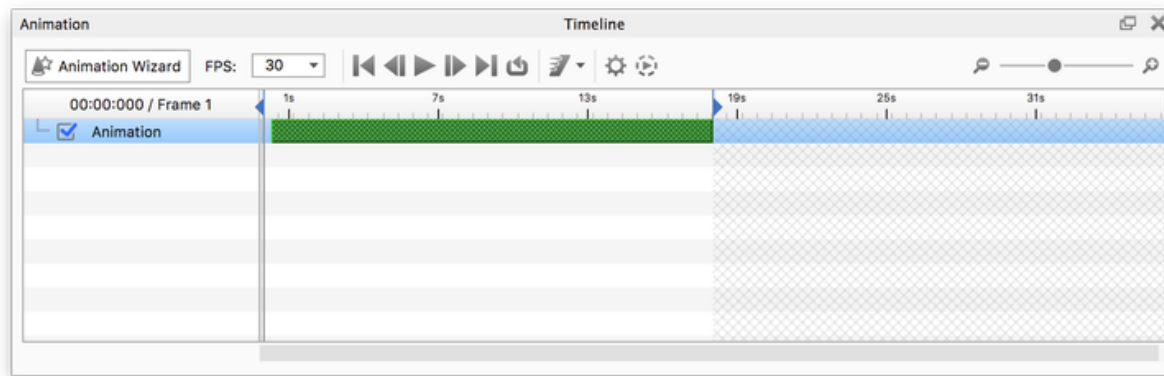

Adjust the properties for your animation and you good to go. See the [Animation Timeline](#) page for more information about the options in the timeline.

Part Animation Types

Translation

A Translation is an animation in which a model or any one of its parts moves along the X, Y, and Z axis and changes position.

Translate X, Y, Z

Controls movement along the X / Y / Z axis.

Axis Orientation


When you apply a rotation to your model, you must choose the rotation axis: X, Y, or Z axis. However, these axes have two states: *Original Local* and *Global*.

- **Original Local** - The Original Local state uses the rotating part's local axis. If Y pointed up originally, rotating the part over 45 degrees means that the Y axis is now also tilted 45 degrees. Use this axis state your model's axis orientation is not square (slightly tilted) with KeyShot's global axis. To reveal the global axis, press the "Z" key on your keyboard.
- **Global** - This is KeyShot's global axis. To reveal the global axis, press the "Z" key on your keyboard. Y axis always

On this page

- [Adding a Part animation](#)
- [Part Animation Types](#)
 - [Translation](#)
 - [Rotation](#)
 - [Rotation](#)
 - [Pivot Point](#)
 - [Fade](#)
 - [Turntable \(only model/group\)](#)

points up. Even if you have rotated a part using your modeling software.

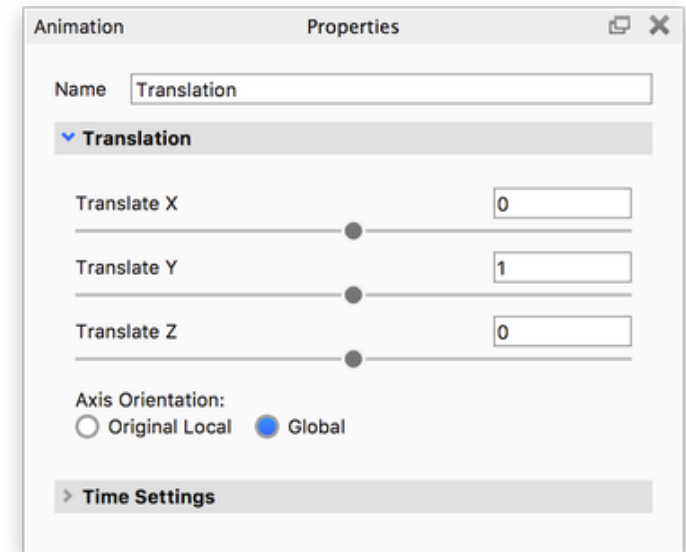

Rotation

A Rotation is an animation in which a model or any one of its parts rotates around its own or some other part's pivot point.

Rotation

Degrees

Controls the angle of rotation in degrees.

Axis

Determines the reference axis of rotation. There are three mutually-exclusive options: X, Y, or Z.

Axis Orientation

When you apply a rotation to your model, you must choose the rotation axis: X, Y, or Z axis. However, these axes have two states: *Original Local* and *Global*.

- **Original Local** - The Original Local state uses the rotating part's local axis. If Y pointed up originally, rotating the part over 45 degrees means that the Y axis is now also tilted 45 degrees. Use this axis state your model's axis orientation is not square (slightly tilted) with KeyShot's global axis. To reveal the global axis, press the "Z" key on your keyboard.
- **Global** - This is KeyShot's global axis. To reveal the global axis, press the "Z" key on your keyboard. Y axis always points up. Even if you have rotated a part using your modeling software.

Pivot Point

A pivot point is the point around which a part/model will rotate. When you apply a rotation animation, the pivot point is set to

"Self" by default. To select a different pivot point from the scene tree or in your scene, click the *Pick* button.

Center and Origin

By default, the pivot point is always at the center of the model. Change this to *Origin* if you wish to use the model's origin instead. For example, it is possible that a cube's origin lies at one of its eight vertices.

Tip

You may use a helper object for even more control over your pivot point (find useful primitives under *Edit > Add Geometry*). Then, position the primitive and click the *Pick* button to select it from your scene tree or your scene.

Dynamic Pivot Points

This setting will allow the rotating part or model to follow a moving helper object. Dynamic pivot points should also be enabled when there are two or more rotations (each with different helper objects) applied to the same part or model.

Note that not all moving helper objects are dynamic pivot points. For example, let's say that you wish to animate a part orbiting around a helper object while the second is moving. In this case, enabling dynamic pivot point will not provide you with the desired result. Instead, make sure that the orbiting object is a child under the helper object in your scene tree hierarchy.

Tip

When dealing with complex animations consisting of multiple pivot points, we recommend a top-down hierarchy structure in your scene tree. Click [here](#) for a full article on how to animate hinges and multiple pivot points.

Fade

The Fade animation provides a smooth transition between two opacity values.

Fade From


This is your model's starting opacity level. Accepted values are between 0% and 100%, where 0% means that the model is invisible and 100% means that the model is 1 entirely visible.

Fade To

This is your model's opacity level by the end of the animation. Accepted values are between 0% and 100%, where 0% means that the model is invisible and 100% means that the model is 1 entirely visible.

Known issue

Fade animations are not supported with the [Cutaway](#) material.

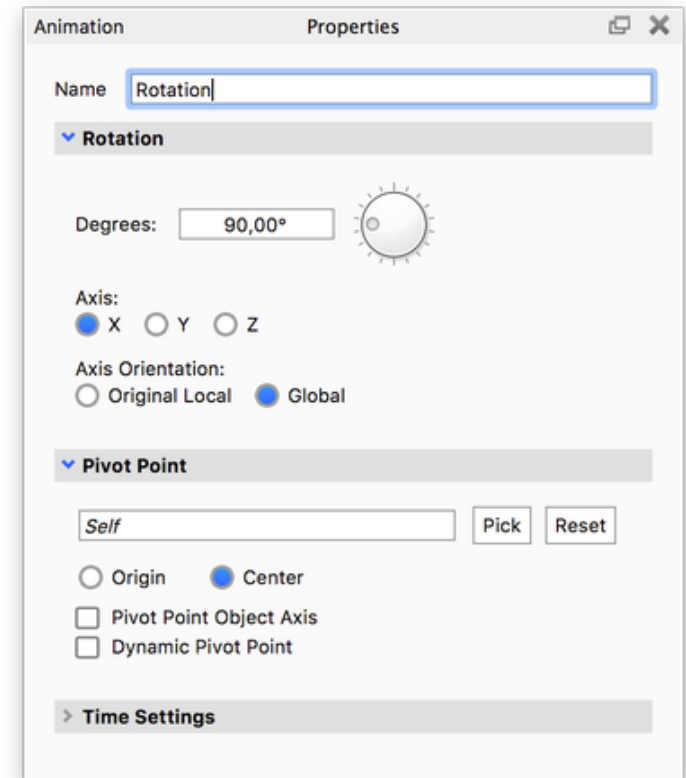

Turntable (only model/group)



When you are adding an animation to a model/group you can also select a Turntable animation. This is similar to the *Rotation* animation but is limited to rotations around the up-axis.

Center of Rotation

Choose if you want your model/group to rotate around the center of the model/group or the center of the environment.

Direction

Set the rotation to go either Clockwise or Counter Clockwise

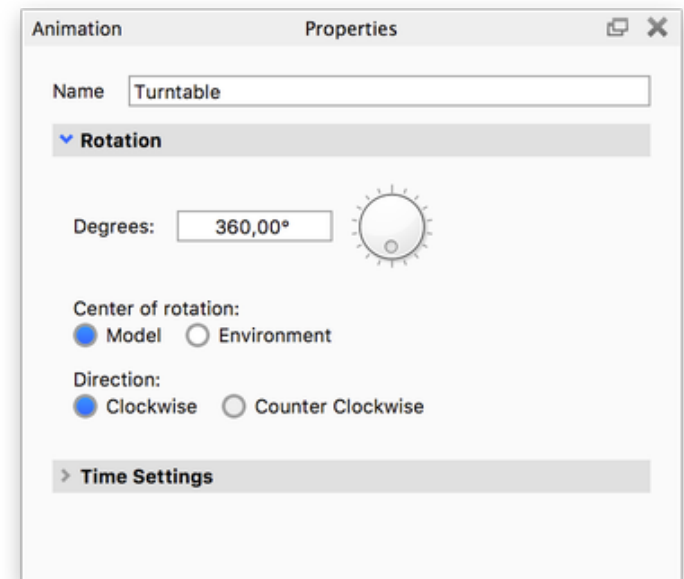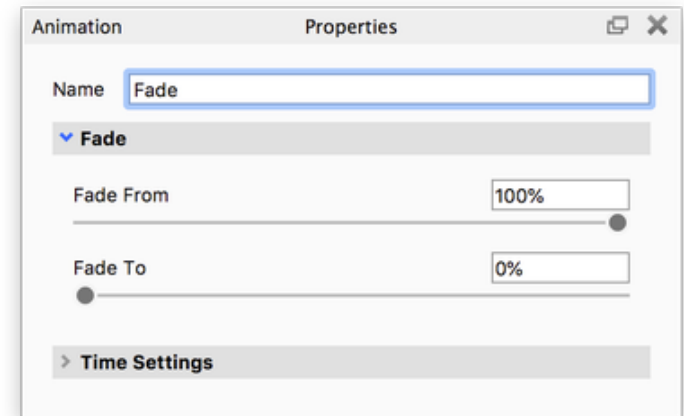

Material Animations


Material Animations enables you to create animations of a material's value based or color properties.

Adding a Material Animation

The Material animations can currently only be added through the Material Graph.

1. Right click the material you want to animate either in the *Real-time View* or in the *In-Project Library* and select *Edit Material Graph*.
2. Inside the *Material Graph* go to *Nodes > Animation* and select the type of animation you want to add.

This will add a folder (yellow node) in the timeline witch contains all animations of the material. The Material animation nodes are represented as red nodes in the timeline.

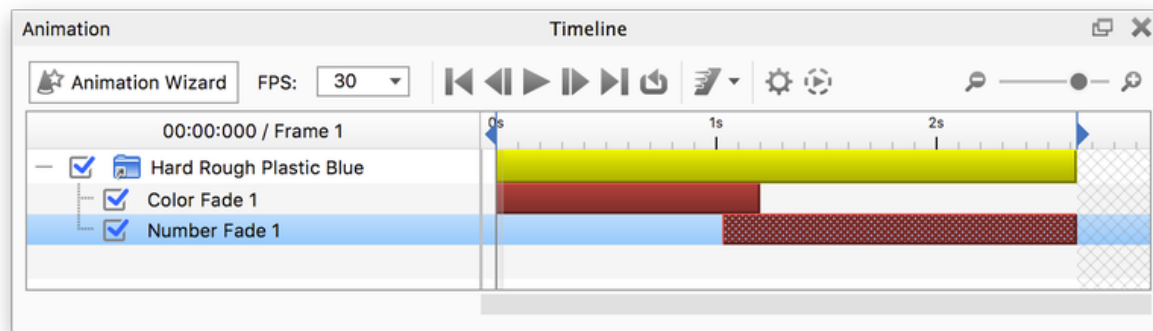

Material Animation Types

Color Fade

Provides a smooth transitions between two or more color values. You can apply a *Color Fade* to your material's diffuse, specular, and opacity map. You may also apply a *Color Fade* to any material value like roughness, refraction index, power, contour width, etc.

Learn about the [Color Fade Node](#).

Number Fade

The *Number Fade* animation provides a smooth transitions between two numerical values. You can apply a *Number Fade* to your material's diffuse, specular, and opacity map. You may also apply a *Number Fade* to any material value like roughness, refraction index, power, contour width, etc.

Learn about the [Number Fade Node](#).

On this page

- [Adding a Material Animation](#)
- [Material Animation Types](#)
 - [Color Fade](#)
 - [Number Fade](#)

This video shows how to add Animation nodes in the Material Graph.

Note

The material animation is tied to the material and thus will apply to all parts with the affected material. If you only want to affect the material of a specific part, you have to unlink it.

Unlike the other animation types the material animations will not be listed in the scene tree under any group or part. Rather, the material animation "lives" inside the [Material Graph](#).

Camera Animations


With camera animations you can animate camera movement, rotation, focal length etc. as well as switch from one camera to another.

The instructions below assume that you've already created the cameras in your scene and set their targets.

Add Camera Animation

Right-click your camera in the scene tree (*Project > Scene*) and select the desired camera type. You can also set up Camera Animations via the [Animation Wizard](#).

The camera animations will be represented blue node on the timeline and switch events with a blue dot.

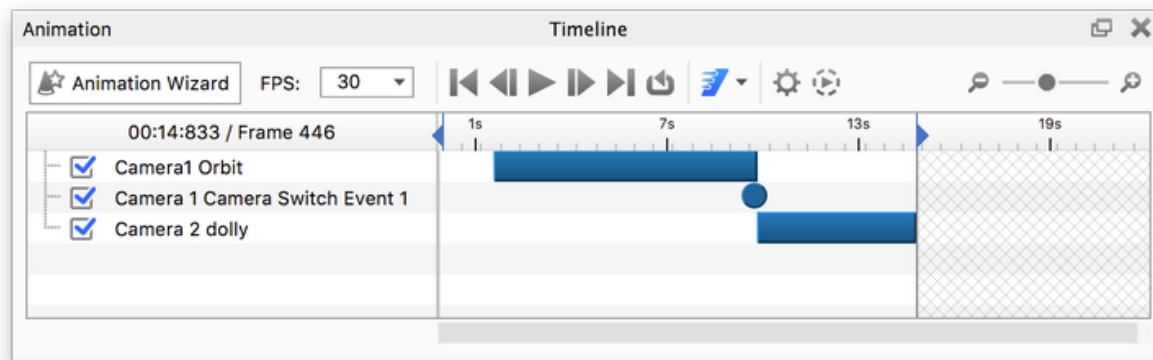

Adjust the properties for your animation and you good to go. See the [Animation Timeline](#) page for more information about the options in the timeline.

Camera Animation Types

Orbit

A camera Orbit rotates the camera around its target.


Properties

Degrees

Control your orbit span in degrees.

On this page

- [Add Camera Animation](#)
- [Camera Animation Types](#)
 - [Orbit](#)
 - [Panorama](#)
 - [Inclination](#)
 - [Dolly](#)
 - [Translation](#)
 - [Path](#)
 - [Depth of Field](#)
 - [Zoom](#)
 - [Switch](#)

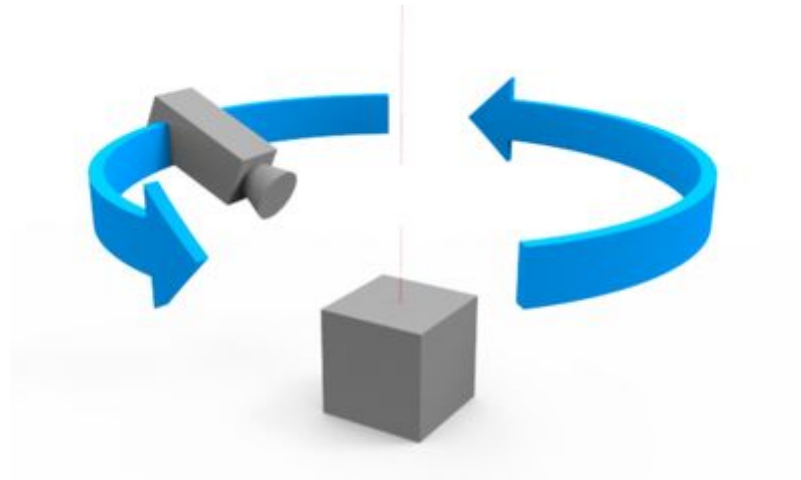

Animation
Properties

Name
Orbit

Rotation

Degrees:
360,00°

Time Settings


Panorama

The camera Panorama rotates the camera around its own axis to simulate a full panoramic view. You may use this type of animation for showing a car interior or an architectural interior.

Properties

Degrees

Control your Panorama span in degrees.

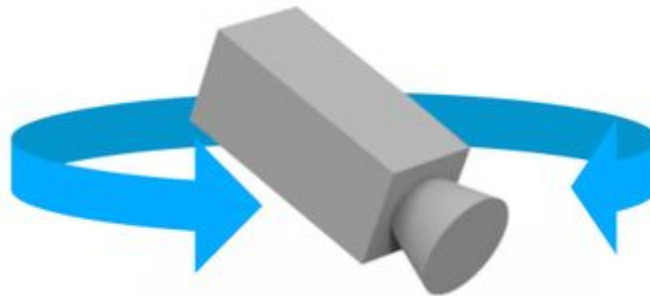

Animation
Properties

Name
Panorama

Rotation

Degrees:
45,00°

Time Settings


Inclination

The camera Inclination rotates the camera up and down around its target.

Properties

Degrees

Control your inclination span in degrees.

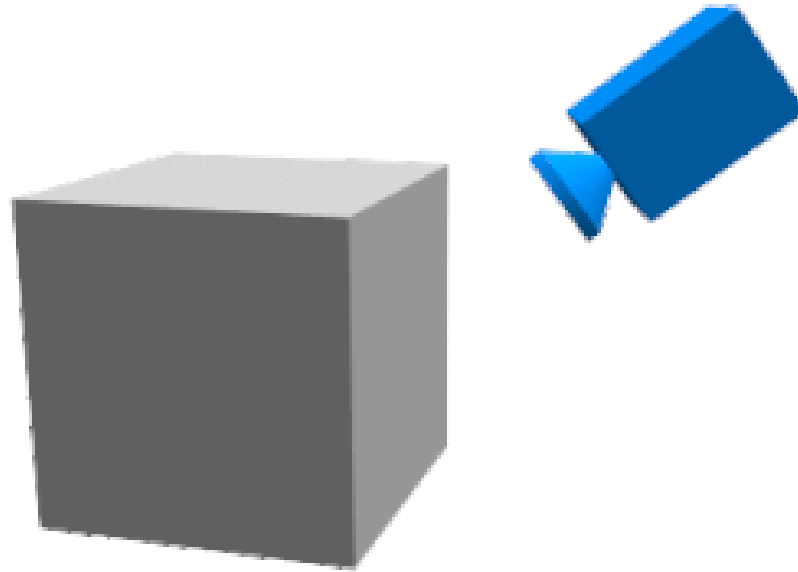

Animation
Properties

Name
Inclination

Rotation

Degrees:
45,00°

Time Settings


Dolly

While the [Zoom](#) animation changes the focal length of the camera to achieve it's effect, the Dolly animation physically moves the camera closer to the subject. Use this camera animation when you want to dynamically change your camera location. The instructions below assume that you've already created a camera in your scene and set its target.

Properties

Dolly

Control your Dolly distance. The Distance slider is calibrated to your [scene units](#).

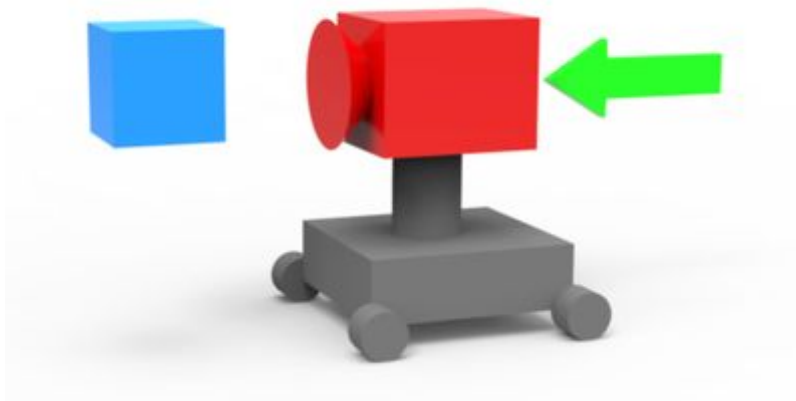

Animation
Properties

Name
Dolly

Distance
1

Time Settings

Translation

Camera Translation allows the camera to move on the X, Y and Z axes.

Properties



Translate X, Y, Z

Controls movement along the X / Y / Z axis.

Axis Orientation

When you apply a rotation to your model, you must choose the rotation axis: X, Y, or Z axis. However, these axes have two states: *Original Local* and *Global*.

- **Original Local** - The Original Local state uses the rotating part's local axis. If Y pointed up originally, rotating the part over 45 degrees means that the Y axis is now also tilted 45 degrees. Use this axis state your model's axis orientation is not square (slightly tilted) with KeyShot's global axis. To reveal the global axis, press the "Z" key on your keyboard.
- **Global** - This is KeyShot's global axis. To reveal the global axis, press the "Z" key on your keyboard. Y axis always points up. Even if you have rotated a part using your modeling software.

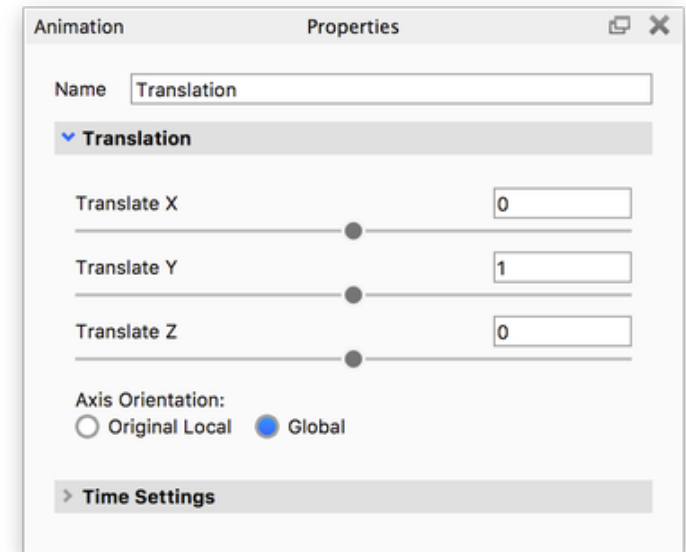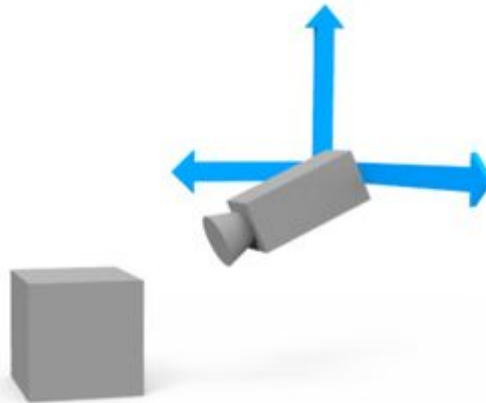

Path

Camera path animation creates a path through which the camera can travel. This is useful for walkthroughs, or for more dynamic camera movements.

Camera Path



Here you compose the path you want the camera to follow, by adding control points. The first control point is the current camera position.

Walkthrough

In walkthrough mode the control point will dictate both position and target of the camera

Target

In target mode the camera will always point to the selected target and the control points will only dictate the position of the camera. Target mode is especially powerful with an animated target.

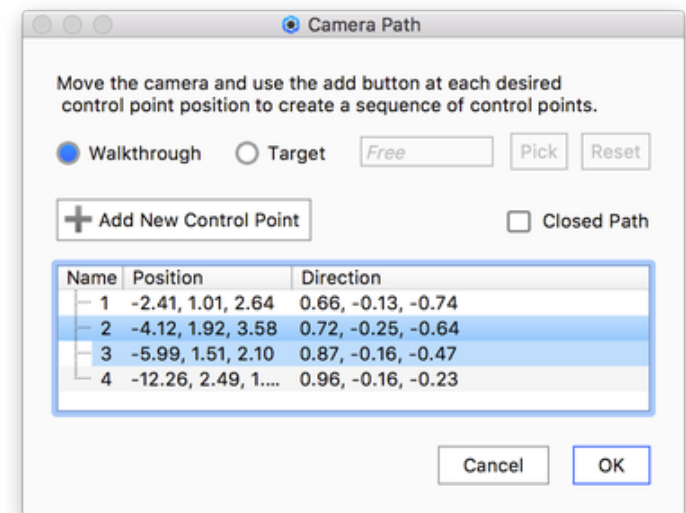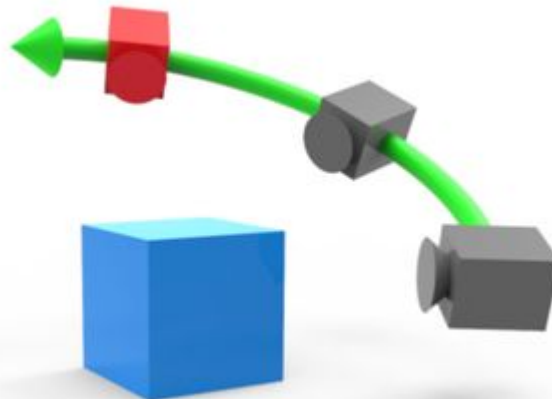

Add new Control Point

Adjust your camera and click *Add new Control point* - Repeat till you have all the points of the path.

Closed Path

When enabled the first and last control points will be connected and create closed loop.

Tip

The Geometry View can help you keep track of which camera positions you have added.

Properties

Control Point list

Lists all the Control Points in the path, the order they are listed is also the order of the path. Right click to rename.

 Add a new control point -

 Change order of the selected control point.

 Move control point - this will launch the geometry view, where the selected control point can be adjusted with the move tool.

 Remove Control Point

Tension

This enables you to adjust the sharpness of the path. Increasing the value will sharpen the change in direction at the control points while negative values will produce a smoother path.

Depth of Field

The camera Depth of Field animation animates your camera's focus point. Before you can add this type of animation to a camera, you need to enable Depth of Field under the camera's settings.


Properties

Start/End Focus distance



Set the distance from the camera to where the image is the sharpest.

The focus point picker  enables you to pick a part to focus on.

Start/End F-stop

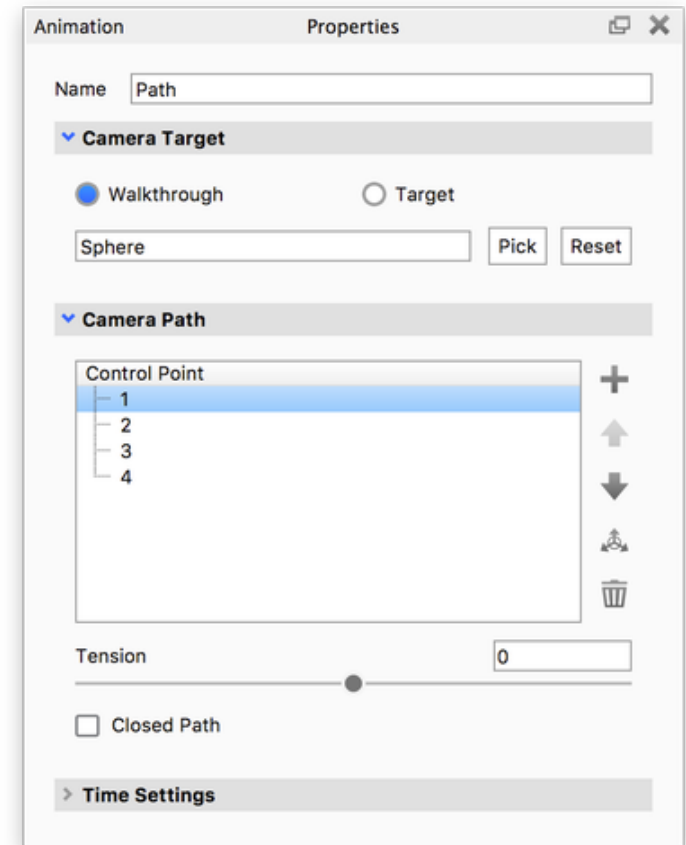

Adjusts the virtual aperture of the camera. This determines the extent of the area that is "in focus".

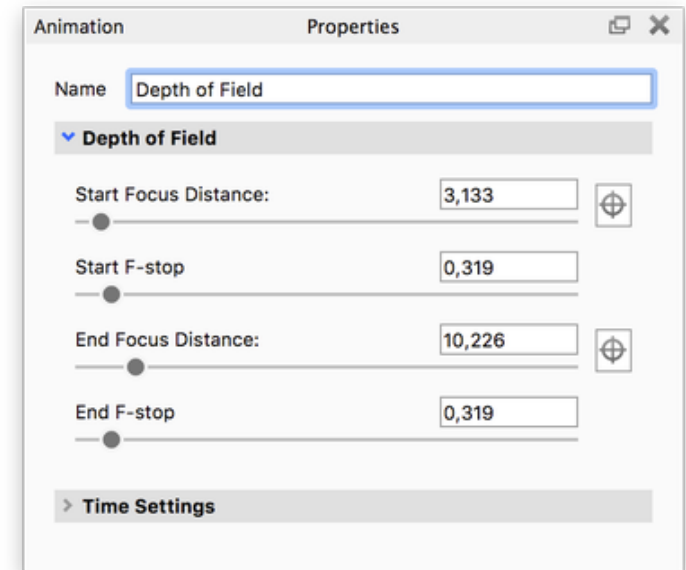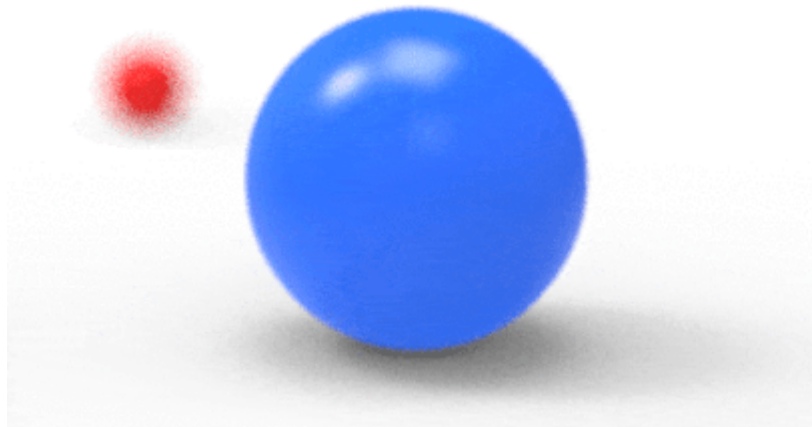

Zoom


The camera Zoom changes the camera's focal length.


If your camera is set to Perspective the focal length will also control the amount of distortion (convergence) seen in the Real-time View. Read about Focal Length in the [Camera, Perspective](#) section.

Properties

Start/End Focal Length

Adjust the Zoom by setting the start and end focal lengths.

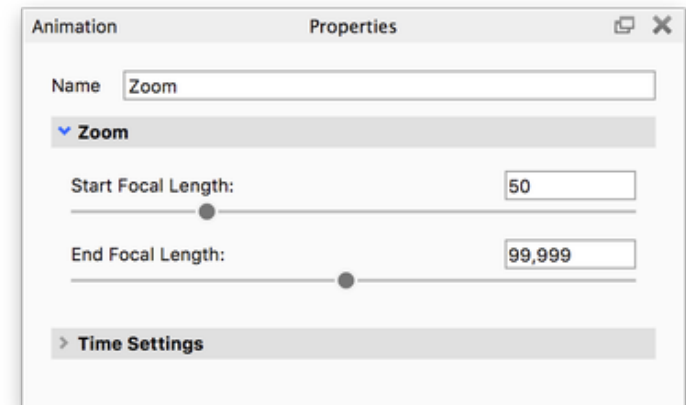

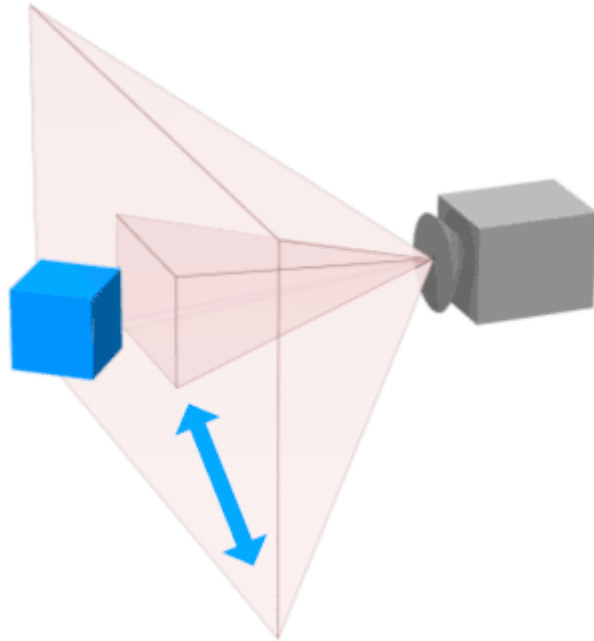

Switch

The camera Switch animation is an instant change between the current camera view and another camera in the scene.



Properties

From Camera

This will be fixed to the camera to which you added the switch event.

To Camera

Select which camera you want to switch to.

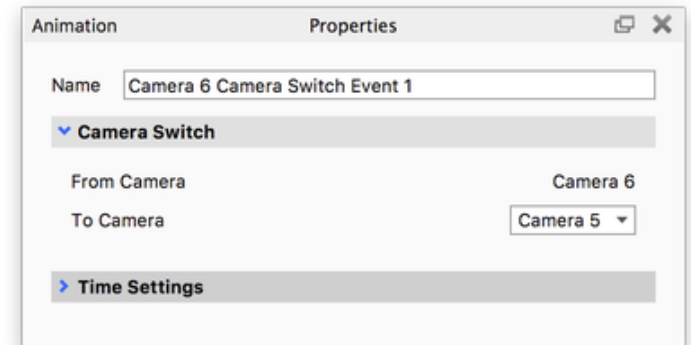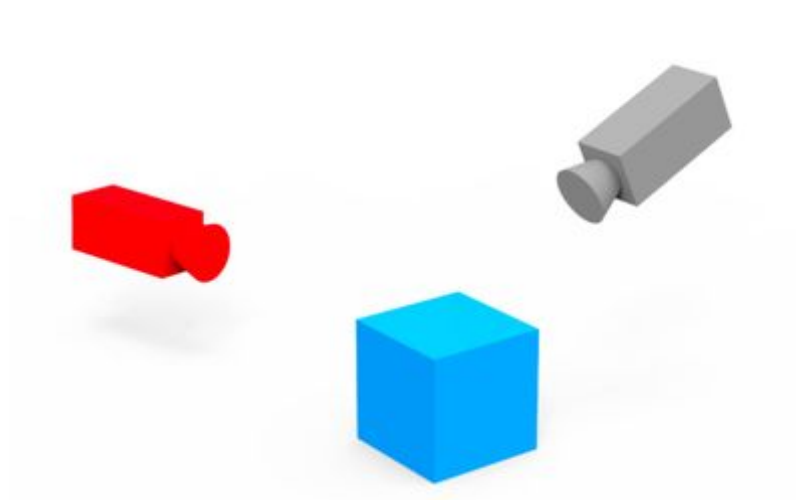

Animation Wizard

The Animation Wizard is the easiest way to create animations step-by-step. You start out by choosing an animation type and the wizard walks you through very step in the animation setup. The instructions below assume that your KeyShot version includes animation.


For more information about each animation type, see the [Animation Types](#) section¹.

On this page


- [How to launch the Animation Wizard](#)
- [Setting up the animation](#)

How to launch the Animation Wizard

1. Click the Animation button in the Toolbar.

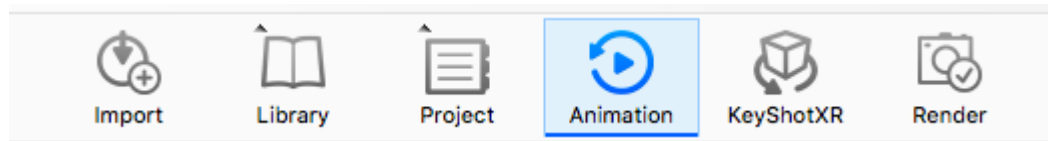


2. Click the Animation Wizard button in the animation timeline.

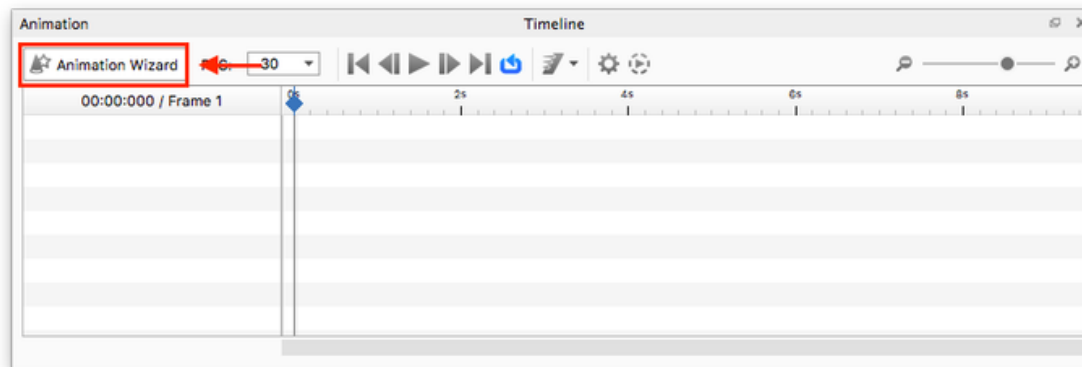

Setting up the animation

The Animation wizard has 3 steps regardless of what type of animation you want to add.

1. Select the type of animation
2. select what you want to animate
3. adjust the settings of the animation. See the [Anim](#)

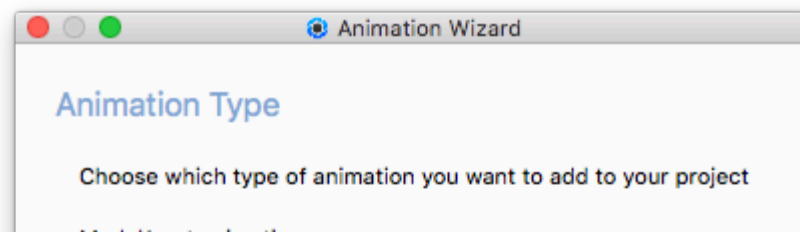

[ation Types](#) section for detailed descriptions of each type.

Once you have set up the animation it will appear in the timeline. If you want to adjust any of the settings you chose in the wizard, simply click the animation node in the timeline and the properties will be available for editing.

See the [Animation Timeline](#) page for more information about the options in the timeline.

model/part animation.

☐ Turntable

☐ Translation

☐ Rotation

☐ Fade

Camera animation:

☐ Orbit	☐ Panorama
☐ Zoom	☐ Dolly
☐ Inclination	☐ Path
☐ Translation	☐ DOF
☐ Camera Switch Event	

Cancel Next


¹ Currently, the Animation Wizard does not include [Material Animations](#).

Working with Animations

Animations are represented with nodes in the timeline and labeled according to the name set in the animation properties. When an animation node is clicked in the timeline, the properties will be displayed.

Animations can be shifted in time and scaled interactively to control timing and duration.

Groups of animations can be consolidated in a single folder for organization. These folders can also be scaled and shifted to control timing and duration.

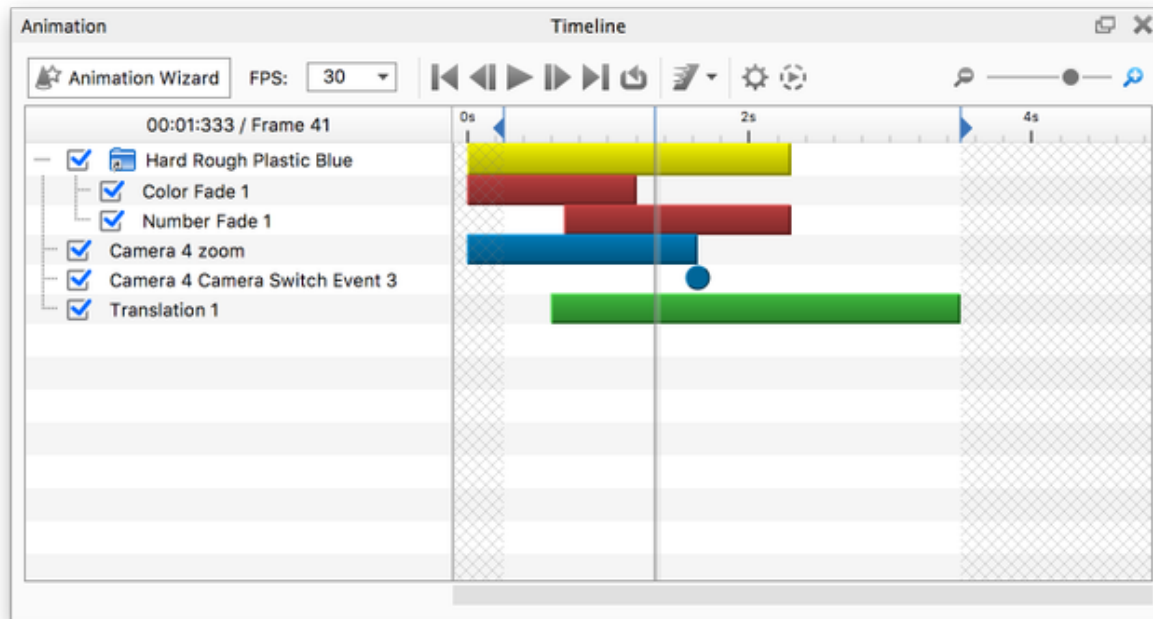

On this page

- [Managing Animations](#)
- [Animation Properties](#)

Managing Animations

Animation management utilities can be found by right-clicking on animations in the animation list. To change the animation order or to move an animation into an existing folder, click and drag the animation. To multi-select animations, hold *CTRL* (PC) or *Command* (Mac) while selecting multiple nodes.

Add Folder

Right-click on a blank area in the animation list to display this option.

Duplicate

To duplicate an animation or animations, right-click on the animation(s) you would like to copy and select *Duplicate*.

Mirror

Right-click on the animation(s) you would like to have a reverse duplicate animation of. This is useful for exploded view

animations and for situations where you need to have the animation end where it began, such as for a looping video.

Lock/unlock

This will lock/unlock the current animation node, this means that the animation is still visible but can not be edited. Locked nodes appear with a color a shade lighter than the unlocked nodes.

Hide/show

Deactivates/activates the current node. This is the same as toggling the checkbox in front of the node name.

Hide and lock

Deactivates and locks the current node

Show only


Deactivates all other camera or part animations.

Rename

This will let you rename the current node, without going through the properties.

Delete


Select this option to delete one or more animations from the timeline.

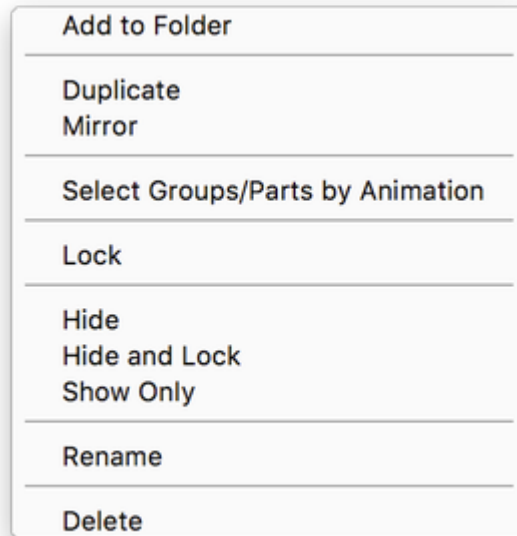

Animation Properties

Selecting an animation will display its properties on the right side of the *Animation* window. These settings are the same used when creating an animation via the *Animation Wizard*. You may change all existing animation settings as well as the name of the animation in the animation properties. See the [Animation Types](#) for detailed descriptions

If the *Animation* window is docked, or if you are using the window with a short window, you can collapse sections of the properties to see the parameters that are most useful to you at that time.

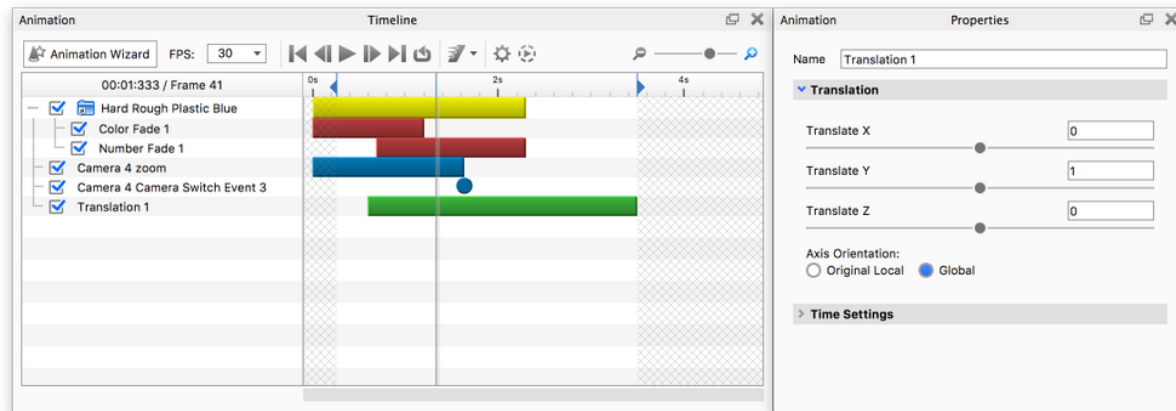

Deformation Animations

A model deformation is any change in the model's shape: twists, expansions, contractions, and character rigging.

These types of animations required advanced techniques available in CAD packages such as Maya and 3DS Max. While KeyShot does not offer a "deformation" animation, it does still support deformations set up in CAD and exported to an Alembic (.ABC) file.

How to import your deformation animations from an Alembic file:

1. Click the Import button (or File > Import) in KeyShot.
2. Browse to your Alembic (.ABC) file and click Open.
3. From the *KeyShot Import* dialogue > *Animation* enable *Deformable Meshes* and confirm your *Import*.
4. Click *Play* in the animation timeline to play a preview in realtime. You may also click and drag the time scrubber in the timeline.

The file will import and appear as an animation node on the *Animation Timeline* where it may be positioned and re-sized.


Animation Effects

Animation Effects add realism to your animations. These effects include:

- [Motion Blur](#)
- [Motion Ease](#)

Motion Blur

KeyShot “Motion Blur” provides a real-time preview of motion applied to the scene where movement is blurred. Capture the motion of objects or cameras as they rotate or move across the screen before you even play an animation or render an image.

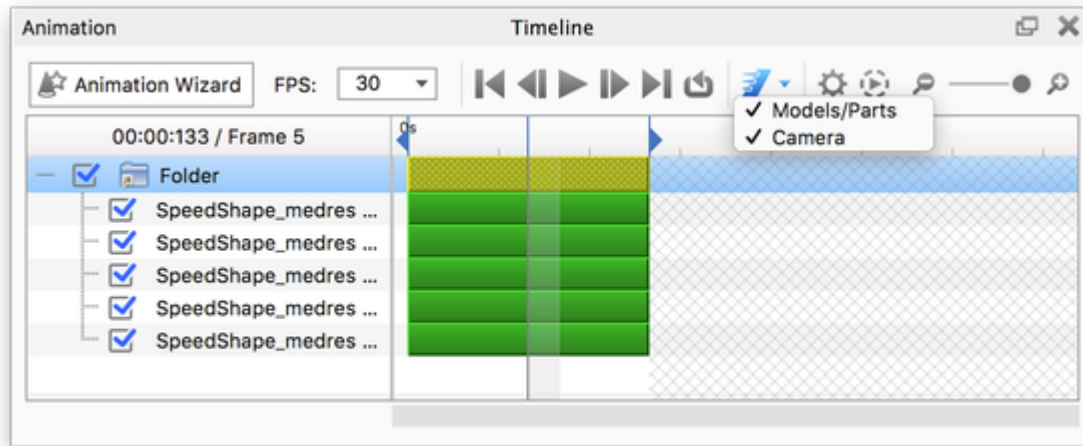

To apply “Motion Blur” to objects in motion, check “Motion Blur” button on the Animation window tool bar. Click the arrow to toggle the motion blur to Model/Part or Camera animation. If you already have objects or cameras with animations applied to them, the real time view will update to show the objects in motion.

“Motion Blur” can be seen quickly after turning the option on by adding a “Translation” animation to an object or an “Orbit” animation to a camera. The amount of motion blur is controlled through the “Animation” settings by adjusting how fast and how far an object or camera is moving. When “Motion Blur” is enabled, the real time preview of the motion is dependent on the FPS setting.

Motion Ease

Motion easing will create a more natural look when applied to rotations, translations and camera animations. This will add acceleration and deceleration to motion.

For example, if a car goes from one stop sign to another and reaches a maximum speed of the 35 miles per hour, it is not traveling that speed for the entire time. The car has to start moving, accelerate to its top speed and then slow down as it approaches the next stop sign. Without motion easing, the car would start and stop abruptly and travel 35 miles per hour the entire time it is in motion.

Linear



Ease In



Ease Out



Ease in/Ease Out

On this page

- [Linear](#)
- [Ease In](#)
- [Ease Out](#)
- [Ease in/Ease Out](#)



KeyShotXR

Note: KeyShotVR has been renamed to KeyShotXR to avoid confusion with the VR capabilities in KeyShot and better capture the extended, interactive features in KeyShotXR.

KeyShotXR gives you the ability to turn your 3D renderings into interactive visuals. With KeyShotXR, you can create and present high-quality, touch-enabled, 3D content in any web browser. The content can be viewed using touch-enabled devices (or mouse) and does not require a browser plugin to work.

How is KeyShotXR different from other 360° viewers?

KeyShotXR goes beyond the standard 360° turntable viewing capability of other viewers. With KeyShotXR you can:

- Create turntable, spherical, hemispherical, tumble and animated interactive visuals.
- Use the camera as a pivot point to create a first person point-of-view or panoramic shot
- Ensure your visuals provide high-quality, scientifically accurate material and lighting representation
- Have full control over your visual with advanced features and customization
- Export direct to Apple iBooks for use on both iPad Retina and iPad Mini

Learn more and see examples [here](#).

In this section

- [KeyShotXR Wizard](#)
- [KeyShotXR Animation](#)
- [KeyShotXR Variables](#)
- [Embedding KeyShotXR](#)



KeyShotXR Wizard

Create a KeyShotXR using the *KeyShotXR Wizard*. The KeyShotXR Wizard is accessed by pressing the  KeyShotXR button on the *KeyShot Toolbar*, through the main menu by selecting *Window, KeyShotXR...*, or by hitting the *X*-key.

Pick KeyShotXR Mode

There are six KeyShotXR modes to choose from. When you select one of the six modes, you will see an animated preview of the KeyShotXR view rotation. After choosing a mode, click *Next*.

Turntable

Creates a standard turntable view to rotate a model up to 360 degrees.

Spherical

Creates a fully-spherical view to see all sides of the model.

Hemispherical

Create a half spherical view to rotate around only a portion of the model.

Tumble


Create a view that rotates around the model center.

Custom

This will enable you to set up a custom viewing angle, you will find the settings in one of the following steps.

Animation

If an animation is present, you will be able to create a KeyShotXR based on the animation. This is different from the other options where the camera that is rotated around the model. See [KeyShotXR Animation](#).

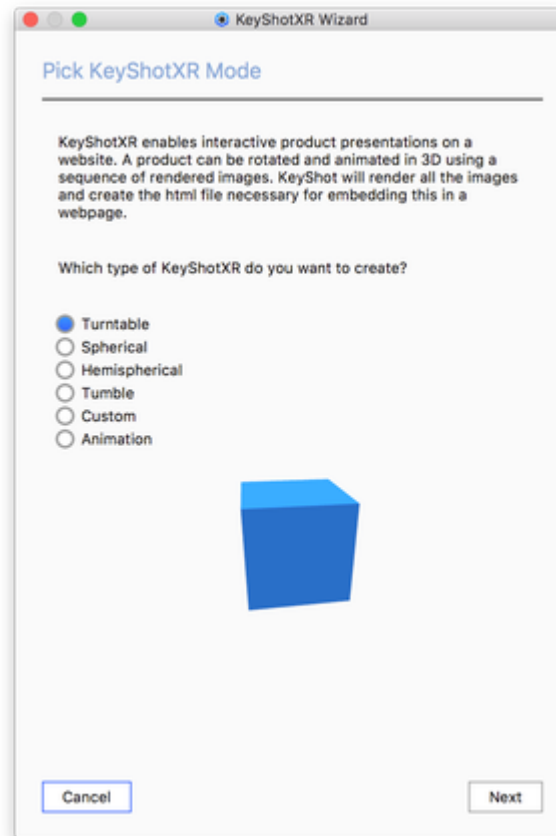

Pick KeyShotXR Rotation Center

Next, you will be able to select the center of rotation for your KeyShotXR. After selecting a center of rotation, click *Next*.

Environment

This option will set the center of rotation at the center of the scene.

Object

On this page

- Pick KeyShotXR Mode
- Pick KeyShotXR Rotation Center
- Pick Initial KeyShotXR View
- Set KeyShotXR Smoothness
 - Smoothness Control
 - Angle Control
- Set KeyShotXR Output
 - KeyShotXR Output
 - Viewing resolution
 - Loading icon
- Time to Render!

Select an object in the scene as a center of rotation.

Panoramic Camera

Use the current camera position as your rotation center. This works well with scenes showing interior.

Camera target


Use your current camera target as your rotation center.

Custom

This option allows you to select the center of rotation from your scene tree items.

Horizontal Environment Rotation

Enable this option to have the environment rotate with the KeyShotXR.

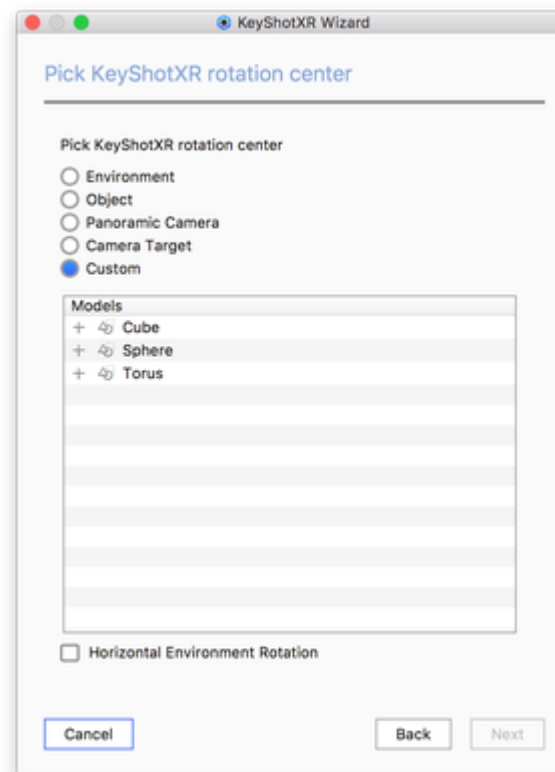

Pick Initial KeyShotXR View

Next, you can fine tune the initial camera view of your KeyShotXR. Set the *Distance*, *Azimuth*, *Inclination*, and *Perspective* as you would on the *Camera* tab. Use the *Grid* option to help locate or center the model for optimal rotation. You can adjust the camera using mouse, pen or touch in the Real-time View or by using the sliders.

Once finished choosing your initial camera view, click *Next*.

Distance

Distance between the Camera Target and Camera in scene units. Setting this value too low can lead to the camera being "inside" the 3D model. This can be controlled with the mouse scroll wheel. The direction can be inverted in Preferences.

Azimuth

Rotation around KeyShot up (Y) axis, measured in degrees.

Inclination

Defines camera tilt, or vertical rotation from horizontal plane.

Perspective


Controls the amount of distortion (convergence) seen in the Real-time view; real world values can be used here to replicate camera lens focal lengths.

Grid

This provides the option to overlay the Real-Time View with a Halves, Thirds, or Quarters grid - useful to help locate objects in the view to optimize the interaction or rotation.

Tip

If you have edited the camera position it is a good idea to save the camera. Otherwise, when rendering, KeyShot may ask if you want to reset to the latest saved state of the camera, which will override any fine tuning you have made in this step of the wizard.

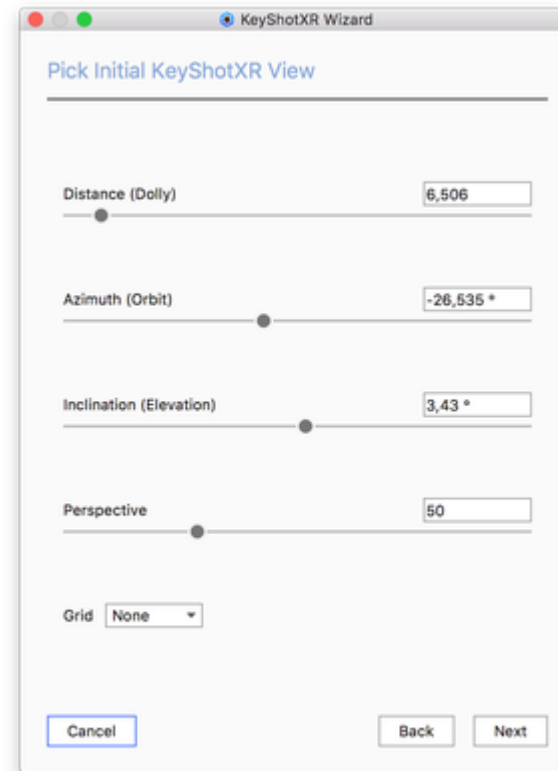

Set KeyShotXR Smoothness

This step allows you to control the smoothness of your KeyShotXR. The options you see below will depend on the KeyShotXR Mode selected. You will see a preview of the KeyShotXR in the Real-time View which will give you an idea about the smoothness of the KeyShotXR with the options entered. Once the number of frames has been set, click *Next*.

Smoothness Control

These settings allow you to control the smoothness of the KeyShotXR rotation. Here, you will also find details on the number of frames that will be rendered and what the horizontal and vertical angle increments will be.

Horizontal Frames

Sets the number of horizontal rotation frames rendered, e.g. a value of 18 will render out 18 frames to capture the rotation.

Vertical Frames

Sets the number of vertical rotation frames rendered and multiplies the amount of horizontal frames rendered by the value entered, e.g. a value of 18 horizontal frames and 3 vertical frames will render out 54 frames total to capture the rotation.

This option will not be seen for Turntable KeyShotXR Mode.

Tip

A higher value for horizontal and/or vertical frames will increase the smoothness of the rotation on the model inside a web browser, but it will also increase the total number of frames to be rendered and may affect load times of the KeyShotXR in the browser.

Angle Control

If *Custom* KeyShotXR Mode is chosen, you will also see options for *Angle Control*. Angle Control allows you to enter beginning and end angles for both the horizontal and vertical rotation.

Horizontal Angle Begin

Start angle for the horizontal movement. Default is -180 degrees.

Horizontal Angle End


Finish angle for the horizontal movement. Default is 180 degrees.

Vertical Angle Begin

Start angle for the vertical movement. Default is -90 degrees.

Vertical Angle End

Finish angle for the vertical movement. Default is 90 degrees.

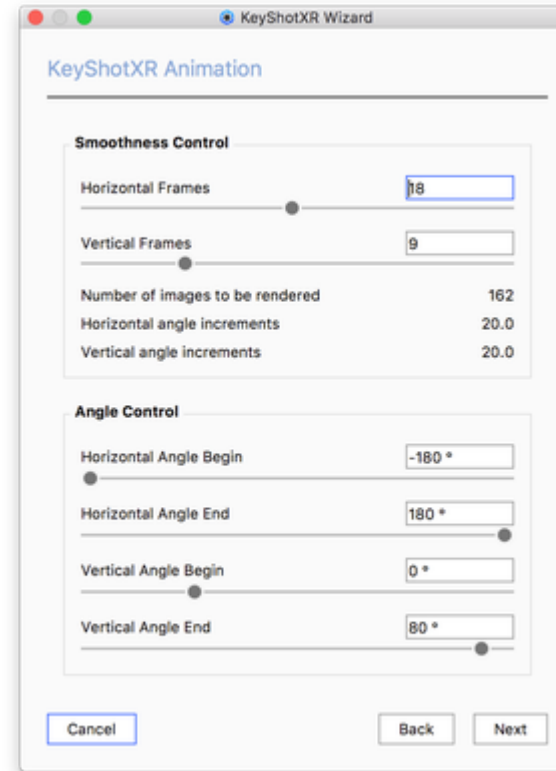

The image shows a screenshot of the 'KeyShotXR Wizard' window, specifically the 'KeyShotXR Animation' tab. The window has a title bar with standard macOS window controls (red, yellow, green buttons) and the text 'KeyShotXR Wizard'. The main content area is divided into two sections: 'Smoothness Control' and 'Angle Control'. In the 'Smoothness Control' section, there are two sliders with corresponding input boxes. The 'Horizontal Frames' slider is set to 18, and the 'Vertical Frames' slider is set to 9. Below these, a summary table shows: 'Number of images to be rendered' as 162, 'Horizontal angle increments' as 20.0, and 'Vertical angle increments' as 20.0. The 'Angle Control' section has four sliders with input boxes: 'Horizontal Angle Begin' is -180°, 'Horizontal Angle End' is 180°, 'Vertical Angle Begin' is 0°, and 'Vertical Angle End' is 90°. At the bottom of the window, there are three buttons: 'Cancel', 'Back', and 'Next'.

Smoothness Control	
Horizontal Frames	18
Vertical Frames	9
Number of images to be rendered	162
Horizontal angle increments	20.0
Vertical angle increments	20.0

Angle Control	
Horizontal Angle Begin	-180 °
Horizontal Angle End	180 °
Vertical Angle Begin	0 °
Vertical Angle End	90 °

Set KeyShotXR Output

In the final step, you configure the KeyShotXR output as well as the viewing resolution for the KeyShotXR.

KeyShotXR Output

Name

Choose a name for your KeyShotXR.

Folder

Choose the location of where it will be saved on your computer.

Viewing resolution

Width/Height

Set the resolution of your KeyShotXR or choose a preset from the pull down.

Presets


Provides a set of present resolutions based on the resolution of the Real-time View (set in the *Project, Image* tab).

Tip

Keep in mind that, when creating content for online use, size does matter. Make sure that your viewing resolution is only as big as needed. Larger images will impact performance without adding to the experience.

Loading icon

Each KeyShotXR has a default image for the loading icon. To change the icon, click *Browse* and select an image file to replace the default image. Maximum image size is 80px x 80px.

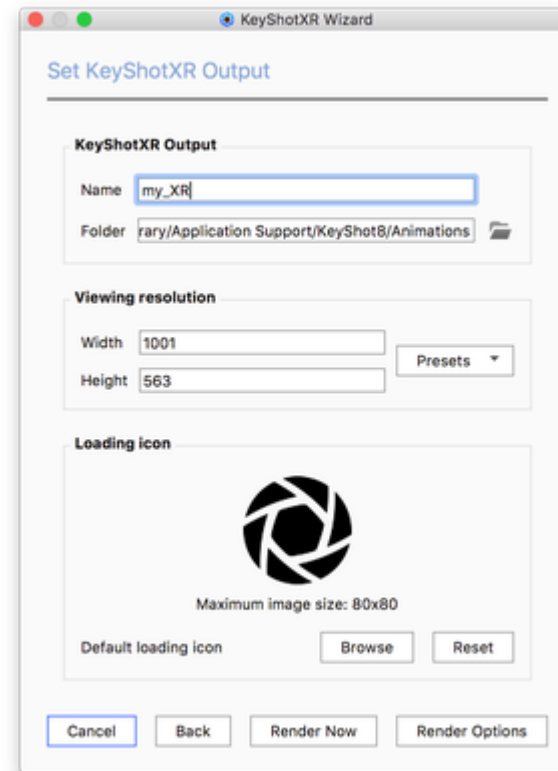

Time to Render!

After you've gone through each step, you have three options to continue:

1. Select *Back* to change any of the settings in the previous steps.
2. Select *Render Now* to start rendering the KeyShotXR.
3. Select *Render Options* to open the Render window to adjust additional [KeyShotXR Output](#) options.

How do I access other KeyShotXR options?

Selecting *Render Options* when you are done in the KeyShotXR Wizard will open the KeyShot Render window, [KeyShotXR Output](#) with more options for the KeyShotXR. Additional options include the ability to create an iBooks widget, adjust damping control and mouse sensitivity, along with deploying directly to FTP and/or generating Layer or Render Passes.

KeyShotXR Animation

If an animation is applied in the scene, the *Animation* option will be shown as an available KeyShotXR mode. Any animation type can be included as a KeyShotXR. Select *Animation* in the *KeyShotXR Wizard*.

Frames

Use the slider or input field to set the number of frames to render in the KeyShotXR.

Time Range


Select if you want to use the entire animation for your KeyShotXR or if you want to limit it to the current *Work area* selected in the Animation timeline.

Resulting FPS

This determines the overall smoothness of the KeyShotXR when it is used in a browser. Increasing the *Frames* slider increases the frame rate. A higher value will give a smoother transition, but be aware that internet speeds can also affect frame rate.

Loop Animation

This option will provide an infinite looping for the KeyShotXR Animation. Additional options can be accessed by selecting *Render Options* on the final step of the KeyShotXR Wizard.

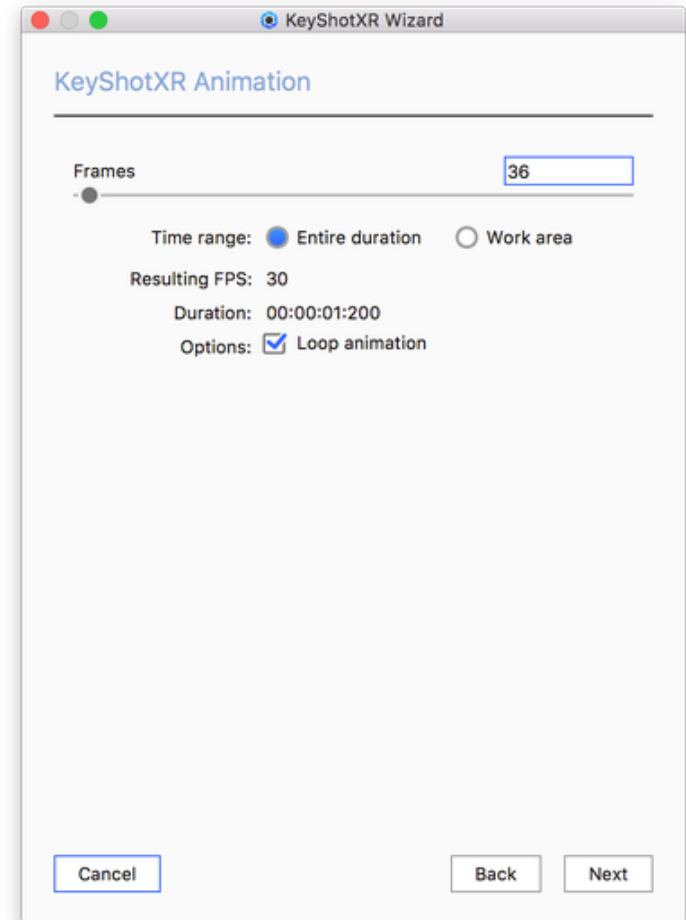

KeyShotXR Variables

Below is a list of KeyShotXR variables. these variables are set in the *.html* file created by KeyShot when the KeyShotXR is rendered. These variables can be edited after the KeyShotXR is created if minor edits are needed, rather than recreating the KeyShotXR over again. The *.html* file can be edited use a standard text editor.

Variable Location

All KeyShot variables are located in the KeyShotXR *.html* file *<head>* section, within a *<script>* tag, and are called by the *initKeyShotXR()* function.

Variable location

```
<head>
  <script type="text/javascript">
    var keyshotXR;

    function initKeyShotXR() {
      var nameOfDiv = "KeyShotXR";
      // Other variables follow here..

      keyshotXR = new keyshotXR(nameOfDiv, /* The other
variables ... */);
    }

    window.onload = initKeyShotXR;
  </script>
</head>
```

nameOfDiv

The div id of the KeyShotXR. This is where the KeyShotXR content is located.

On this page

- Variable Location
 - nameOfDiv
- Variables
 - General Settings
 - Folder Name - `folderName`
 - Download only on click - `downloadOnInteraction`
 - Image type - `imageExtension`
 - Background color - `backgroundColor`
 - Frame number
 - Horizontal - `uCount`
 - Vertical - `vCount`
 - Start Frame
 - Horizontal - `uStartIndex`
 - Vertical - `vStartIndex`
 - ViewPort Size
 - Width - `viewPortWidth`
 - Height - `viewPortHeight`
 - Rotation settings
 - Continuous horizontal rotation - `uWrap`
 - Continuous vertical rotation - `vWrap`
 - Rotation damping - `rotationDamping`
 - Mouse Sensitivity
 - Horizontal - `uMouseSensitivity`
 - Vertical - `vMouseSensitivity`
 - Zoom levels
 - Minimum - `minZoom`
 - Maximum - `maxZoom`
 - Loading icon
 - Show loading icon - `showLoading`
 - Set loading icon - `loadingIcon`
 - Screen size
 - Automatic resizing (responsive size) - `downScaleToBrowser`
 - Allow full screen - `allowFullscreen`
 - Move Direction
 - Reverse horizontal direction - `uReverse`
 - Reverse vertical direction - `vReverse`
- Deprecated variables
 - `addDownScaleGUIButton`

Position in html

```
<body oncontextmenu="return false;">
  <div id="KeyShotXR"></div>
</body>
```

Variables

General Settings

Folder Name - *folderName*

The name of the folder that contains all the files for the KeyShotXR. This is set under *Render, Output* options in the *KeyShotXR* tab, *Name* entry.

Usage Example:

```
var folderName = "material_ball_XR.10";
```

Download only on click - *downloadOnInteraction*

This variable allows a KeyShotXR only to be loaded after it has been clicked. This option is set in the KeyShotXR settings, under *Render, Output* options in the *KeyShotXR* tab, under *Advanced*.

Usage Example:

```
var downloadOnInteraction = false;
```

Image type - *imageExtension*

This variable is the image extension for the frames generated for the KeyShotXR. Only one extension type may be used. This is

set in the KeyShotXR settings, under *Render, Output* options in the *KeyShotXR* tab, under *KeyShotXR Control, Format*.

Usage Example:

```
var imageExtension = "jpg";
```

Background color - backgroundColor

The background color of the .html page in hexadecimal notation. This will be the color behind/surrounding the KeyShotXR. The default is white (#FFFFFF). This option can only be set from in the .html file.

Usage Example:

```
var backgroundColor = "#FFFFFF";
```

Frame number

Horizontal - uCount

This is the number of horizontal frames in the KeyShotXR. This is set under *Render, Output* options in the *KeyShotXR* tab, under *KeyShotXR Control, Smoothness Control*.

Usage Example:

```
var uCount = 18;
```

Vertical - vCount

This is the number of vertical frames in the KeyShotXR. This is set under *Render, Output* options in the *KeyShotXR* tab, under *KeyShotXR Control, Smoothness Control*.

Usage Example:

```
var vCount = 18;
```

Start Frame

Horizontal - *uStartIndex*

This controls the horizontal start frame for the KeyShotXR. This is set by viewing angle in the KeyShotXR settings, under *Render, Output* options in the *KeyShotXR* tab, under *KeyShotXR Control, Angle Control*.

Usage Example:

```
var uStartIndex = 1;
```

Vertical - *vStartIndex*

This controls the vertical start frame for the KeyShotXR. This is set by viewing angle in the KeyShotXR settings, under *Render, Output* options in the *KeyShotXR* tab, under *KeyShotXR Control, Angle Control*.

Usage Example:

```
var vStartIndex = 0;
```

ViewPort Size

Width - *viewPortWidth*

The width of the KeyShotXR in pixels. This is set under *Render, Output* options in the *KeyShotXR* tab, *Viewing Resolution*, first text field entry.

Usage Example:

```
var viewportWidth = 640;
```

Height - viewportHeight

The height of the KeyShotXR in pixels. This is set under *Render, Output* options in the *KeyShotXR* tab, *Viewing Resolution*, second text field entry.

Usage Example:

```
var viewportHeight = 640;
```

Rotation settings***Continuous horizontal rotation - uWrap***

This allows the KeyShotXR to continue rotation after last frame in the horizontal direction when set to *true*.

Usage Example:

```
var uWrap = true;
```

Continuous vertical rotation - vWrap

This allows the KeyShotXR to continue rotation after last frame in the vertical direction when set to *true*.

Usage Example:

```
var vWrap = true;
```

Rotation damping - rotationDamping

This controls the speed at which the rotation slows down when a KeyShotXR is rotated. Increasing this value will increase the duration of rotation before coming to a stop. This is set in the KeyShotXR settings, under *Render, Output* options in the *KeyShotXR* tab, under *Advanced*.

Usage Example:

```
var rotationDamping = 0.96;
```

Mouse Sensitivity***Horizontal - uMouseSensitivity***

This controls the horizontal mouse/touch sensitivity for the KeyShotXR. Changing the value to/from a negative value will change the direction of the KeyShotXR rotation. This is set under *Render, Output* options in the *KeyShotXR* tab, under *Advanced*.

Usage Example:

```
var uMouseSensitivity = -0.0055;
```

Vertical - vMouseSensitivity

This controls the vertical mouse/touch sensitivity for the KeyShotXR. Changing the value to/from a negative value will change the direction of the KeyShotXR rotation. This is set under *Render, Output* options in the *KeyShotXR* tab, under *Advanced*.

Usage Example:

```
var vMouseSensitivity = 1;
```

Zoom levels

Minimum - minZoom

This controls the minimum zoom level for the KeyShotXR. Setting to a negative value will allow Zoom out capability. Increasing the value above 1 will change the zoom level of the KeyShotXR when loaded. This is set in the KeyShotXR settings, under *Render, Output* options in the *KeyShotXR* tab, under *Advanced* by checking the *Zoom-In* checkbox.

Usage Example:

```
var minZoom = 1;
```

Note

KeyShot automatically calculates the resolution when rendering the KeyShotXR based on this setting when 'Preserve image quality' option is enabled. If changed afterward, grainy images may be experienced.

Maximum - maxZoom

This controls the maximum zoom level for the KeyShotXR. Increasing this number, increases the amount a KeyShotXR can be zoomed in. This is set in the KeyShotXR settings, under *Render, Output* options in the *KeyShotXR* tab, under *Advanced* by checking the *Zoom-In* checkbox.

Usage Example:

```
var maxZoom = 1;
```

Note

KeyShot automatically calculates the resolution when rendering the KeyShotXR based on this setting when 'Preserve image quality' option is enabled. If changed afterward, grainy images may be experienced.

Loading icon

Show loading icon - `showLoading`

If this variable is set to *true*, the loading icon will be shown. If set to *false*, it will not be shown. This option is set in the KeyShotXR settings, under *Render, Output* options in the *KeyShotXR* tab, under *Advanced* by selecting the *Show Loading Screen* option.

Usage Example:

```
var showLoading = true;
```

Set loading icon - `loadingIcon`

This allows a different loading icon to be used. The variable is the filename of the icon located in the the KeyShotXR *files* folder. This option is set in the KeyShotXR settings, under *Render, Output* options in the *KeyShotXR* tab, under *Advanced*, by selecting the *Default loading icon*.

Usage Example:

```
var loadingIcon = "ks_logo.png";
```

Screen size

Automatic resizing (responsive size) - `downScaleToBrowser`

This variable controls the automatic resizing of a KeyShotXR when a browser is resized; it allows a KeyShotXR to be responsive. This is set to true by default and can only be changed in the *.html* file.

Usage Example:

```
var downScaleToBrowser = true;
```

Allow full screen - allowFullscreen

This variable allows a KeyShotXR to be viewed fullscreen when it is double-clicked in desktop browsers. This option is set in the KeyShotXR settings, under *Render, Output* options in the *KeyShotXR* tab, under *Advanced*, by selecting *Allow Fullscreen Mode by Double-Click*.

Usage Example:

```
var allowFullscreen = true;
```

Move Direction

Reverse horizontal direction - uReverse

This variable will reverse the horizontal direction of rotation when set to *true*.

Usage Example:

```
var uReverse = false;
```

Reverse vertical direction - vReverse

This variable will reverse the vertical direction of rotation when set to *true*.

Usage Example:

```
var vReverse = false;
```

Deprecated variables***addDownScaleGUIButton***

With KeyShot 6 this option has been deprecated. The option is still available for legacy KeyShotXRs that require this from in the *.html* file.

Usage Example:

```
var addDownScaleGUIButton = false;
```

Embedding KeyShotXR

There are several methods for embedding a KeyShotXR. This section will provide the instructions for embedding a KeyShotXR within various media.

In this section

- [Embedding a KeyShotXR in iBooks](#)
- [Embedding a KeyShotXR in PowerPoint](#)
- [Embedding a KeyShotXR in Wordpress](#)

Embedding a KeyShotXR in iBooks

The following instructions describe the process for creating and embedding a KeyShotXR in an iBook using iBooks Author.

Prerequisites

You will need the following to embed a KeyShotXR in an iBook:


- [iBooks Author](#)
- A KeyShotXR iBooks widget

Creating a KeyShotXR iBooks Widget

To create an iBooks Widget of your KeyShotXR, follow the process below:

1. Open the *Render* dialogue by selecting *Render* from the *Toolbar* or use Ctrl-P (Windows)/Cmd-P (Mac).
2. Select the *KeyShotXR* tab in the *Output* section.
3. Check the *Create iBooks Widget* under the *KeyShotXR Control* section.

On this page
• Prerequisites • Creating a KeyShotXR iBooks Widget • Embedding a KeyShotXR iBooks Widget into iBooks • Viewing a KeyShotXR in an iBook

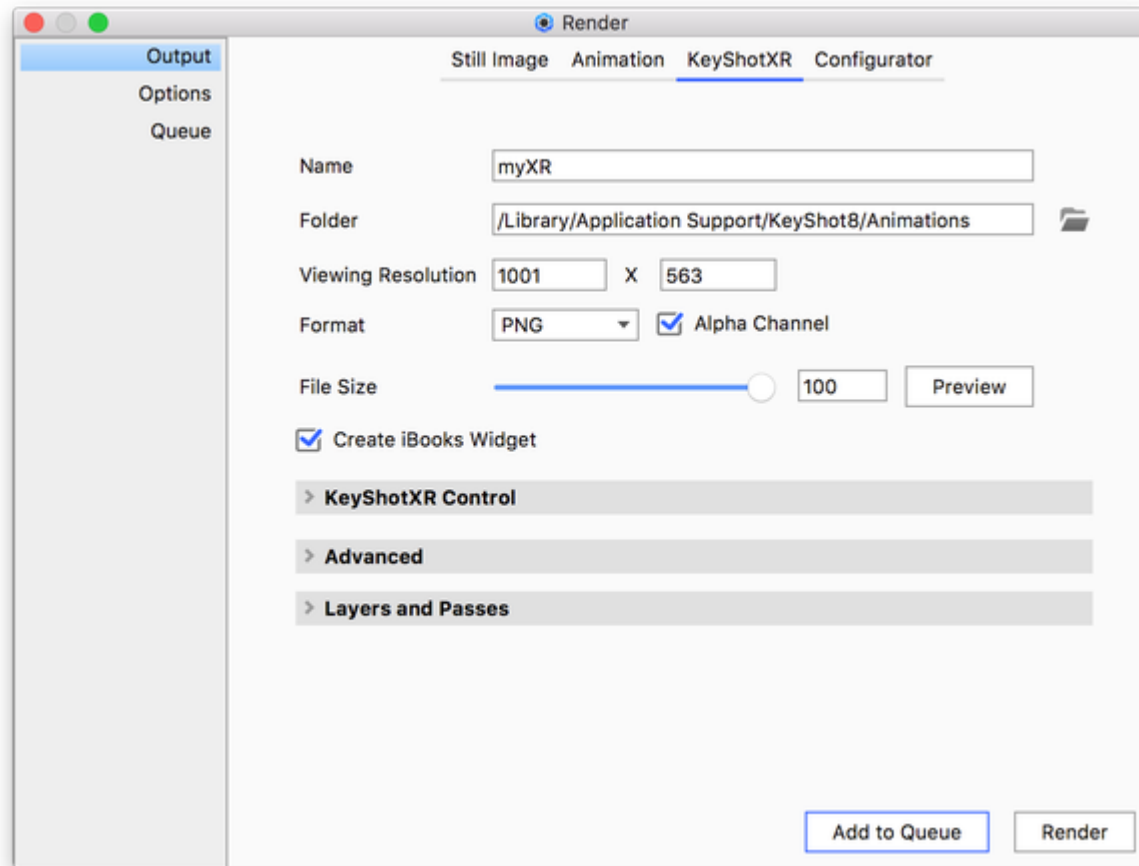

Embedding a KeyShotXR iBooks Widget into iBooks

To use the iBooks Widget, follow the process below:

1. Open iBooks Author and create a new book or open an existing book.
2. Locate the iBook Widget you created and drag it to the book, or select *Insert, Widget, HTML* from the iBooks Author menu.

Your widget will be added to the page. You can verify with the widget inspector by selecting *View, Show Inspector*, selecting *Widget Inspector* and choosing the widget.

Viewing a KeyShotXR in an iBook

Viewing the iBook can be done by selecting *Preview* while an iOS device is connected to the computer. The iBook can also be exported and transferred using iTunes.

Embedding a KeyShotXR in PowerPoint

If you want to add your KeyShotXR in a presentation (Powerpoint/KeyNote) you have to install a plugin to achieve it. There are a number of plugins out there - The one we have tried is [LiveSlide](#), which is a free plugin that works with both PowerPoint and Keynote.

You must be online to view web content on your slides.


Windows (Powerpoint)

Works with

- Windows XP or later
- PowerPoint on Office 2007 Service Pack 3 or later

Add slide

1. Download and install the [Live Slides Plugin](#)
2. Launch PowerPoint - in the ribbon you will now find a Live Slides tab
3. Click Live Slide in the insert section

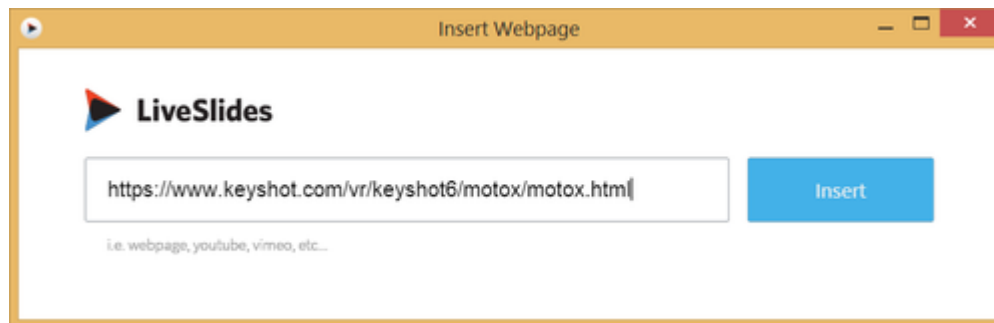

4. LiveSlide will add a placeholder slide where the KeyShotXR will be displayed when the presentation is launched.

Mac (PowerPoint/KeyNote)

Works with


- OS X Yosemite or later
- PowerPoint on Office 2011 for Mac or later
- Keynote 5.3 or later

Add Slide

1. Download and install the [Live Slides Plugin](#)
2. Launch PowerPoint/KeyNote
3. Launch LiveSlide.app and enter the link to the webpage

On this page

- [Windows \(Powerpoint\)](#)
- [Mac \(PowerPoint/KeyNote\)](#)
- [Test KeyShotXR](#)

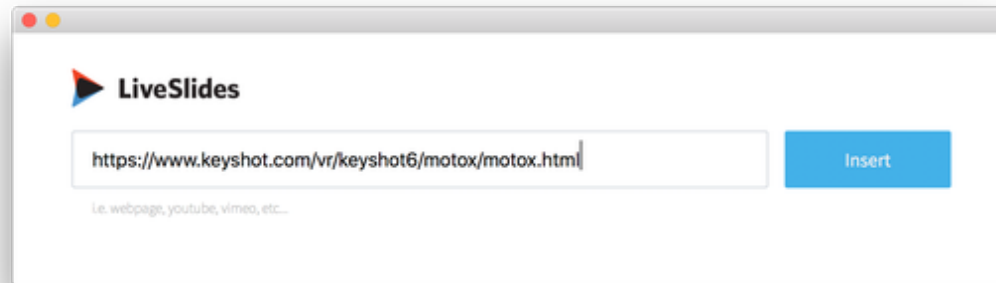

4. LiveSlide will add a placeholder slide where the KeyShotXR will be displayed when the presentation is launched.

Test KeyShotXR

You can find a Test KeySootXR here <https://www.keyshot.com/vr/keyshot6/motox/motox.html>.

Embedding a KeyShotXR in Wordpress

After you have created the KeyShotXR, you will find the files in your *KeyShot Resources* folder under *Animations* or in the location you selected in the KeyShotXR Wizard.

Displaying the KeyShotXR on a Wordpress website, is much like displaying a KeyShotXR on any website with static pages. Follow the instructions below to upload and display your KeyShotXR.

Note

You will need FTP/SFTP access to your webserver or request your site admin to upload for you.

How to embed

- Upload the entire KeyShotXR folder to a folder on your webserver. (Ex. uploading *my_keyshotxr* folder to */srv/www/wordpress/xr/* would display the KeyShotXR at *yourwebsite.com/xr/my_keyshotxr*)
- Copy and paste the KeyShotXR code (found in the *instructions.html* file) to the location in the post or page you want the KeyshotXR to appear.
- Ensure that you select the *Text* tab (not the *Visual* tab) on the Wordpress post/page edit screen. Copy and paste the code into this area.
 - Make sure the *src* url location of the html file in the code matches the location of the upload.
 - If you are uploading to a secure website with SSL, make sure to use *https* instead of *http* in the *src* url.

Examples

Here are two example embed code snippets for a KeyShotXR:

KeyShotXR Embed Script Example #1

```
<div style="left: 0px; width: 100%; height: 0px; position:
relative; padding-bottom: 100%; overflow: hidden;">
<iframe style="position: absolute; top: 0px; left: 0px;
height: 100%; width: 1px; min-width: 100%; *width: 100%;"
src="https://www.keyshot.com/vr/keyshot6/motox/motox.html"
frameborder="0" scrolling="no"
allowfullscreen="allowfullscreen"></iframe>
</div>
```

On this page

- [How to embed](#)
- [Examples](#)

KeyShotXR Embed Script Example #2

```
<div style="position: relative; padding-bottom: 56.25%;  
height: 0px; overflow: hidden;">  
<iframe style="position: absolute; top: 0px; left: 0px;  
height: 100%; width: 1px; min-width: 100%; *width: 100%;"  
src="https://www.keyshot.com/vr/keyshot6/ferrari/ferrari.html"  
frameborder="0" scrolling="no"  
allowfullscreen="allowfullscreen"></iframe>  
</div>
```

The difference you will notice between the two code snippets is the *padding-bottom* value. This helps maintain the aspect ratio of the KeyShotXR and is set automatically when the KeyShotXR is generated. A 1:1 ratio (square) will have *padding-bottom* value of 100%, while a 16:9 ratio (rectangular) will have a 56.25% ratio.

Configurator


The *KeyShot Configurator* is a tool available in KeyShot Pro for presenting model and material variations in real-time for design reviews and interactive point-of-sale displays.



The model in this scene was created by dk and downloaded from GrabCAD

KeyShot Configurator Wizard

The KeyShot Configurator Wizard can be accessed from the KeyShot Ribbon. The Wizard guides you through the setup of Parent Models, Components, and their relationships. You can also define Material Variations, Material Ways, Studios to include, and Layout options. To view the Configurator, enter Presentation Mode and use the interactive menus to control which model and material is displayed.



On this page

- KeyShot Configurator Wizard
 - Overview
 - Parent Models
 - Components
 - Component Groups
 - Material Variations
 - Material Sets
 - Material Ways
 - Studios
 - Layout
 - Summary
- Using the KeyShot Configurator

Overview

The first step of the Configurator Wizard is to select what you want to present - Model Variations, Material Variations, or both.

Model Variations


Use to set up a Configurator to display different model configurations.

Material Variations

Use to set up a Configurator to display different materials for a model.

Model and Material Variations

Use to set up a Configurator to display different model configurations and materials for any model configuration.

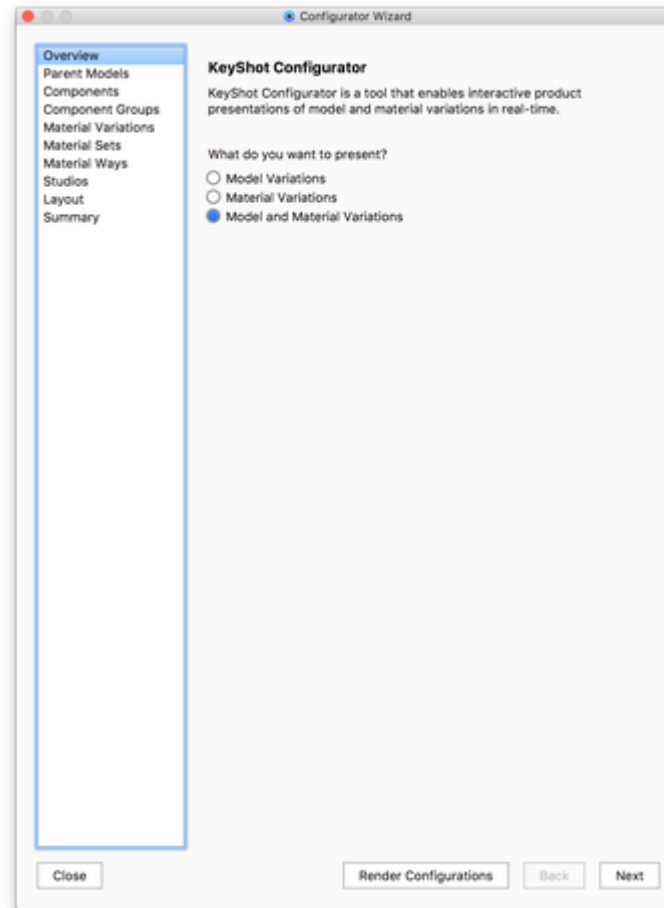

Parent Models


The second step is to define the *Parent Model*, which is the top-level product variation you wish to present. This is required even if you are only presenting Material Variations. If this is the case you can simply select the Default Model Set as your Parent Model.


Select existing Model Sets

If you already have separated Parent Models and components into Model Set, choose the Model Sets that you want to be parent models.

Select geometry from Scene

If you have not got each of your Parent Models and Components in separate Model Sets, you can create them here by using the option to *Select geometry from the scene*. To do so, check the box next to the model or parts you want to define as the Parent and click the *Add Model Set* button above the Parent Models list. This will automatically create a Model Set in the Project window. Once one or more Parent Models have been added in the Configurator Wizard you can select in the list and click the Preview button to view and confirm in real-time.

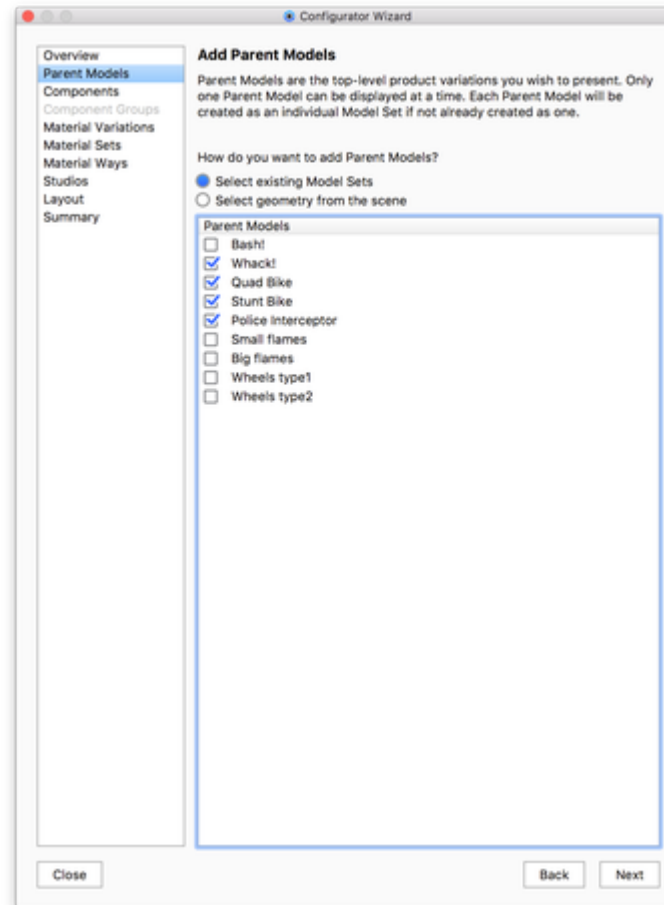


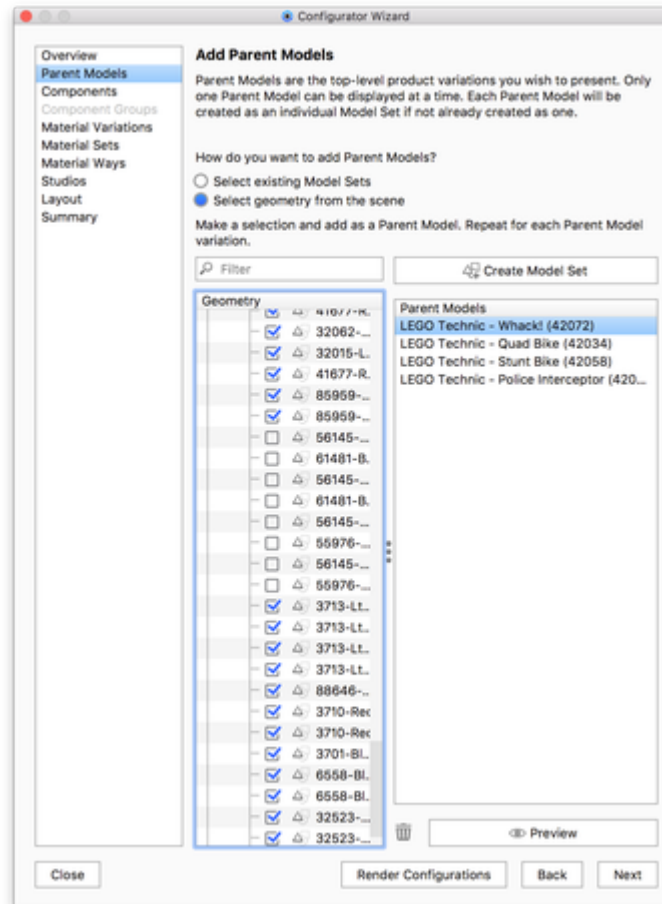


Components

If you wish to present part or accessory variations that are dependent on Parent Models you will need to add Components.

Once again you can select existing Model Sets if you have already separated them in the Scene tab or select geometry from the scene manually.

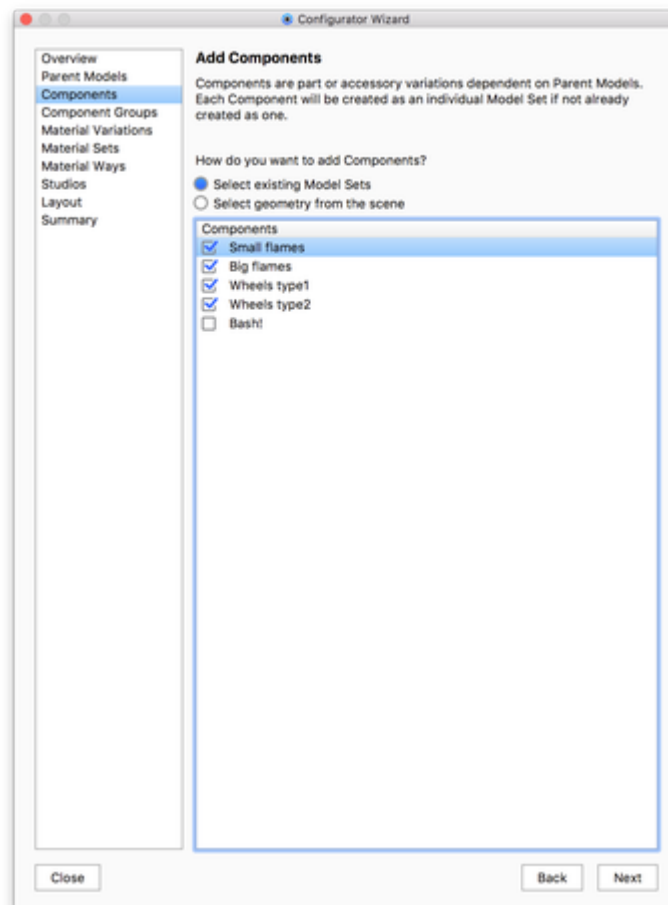

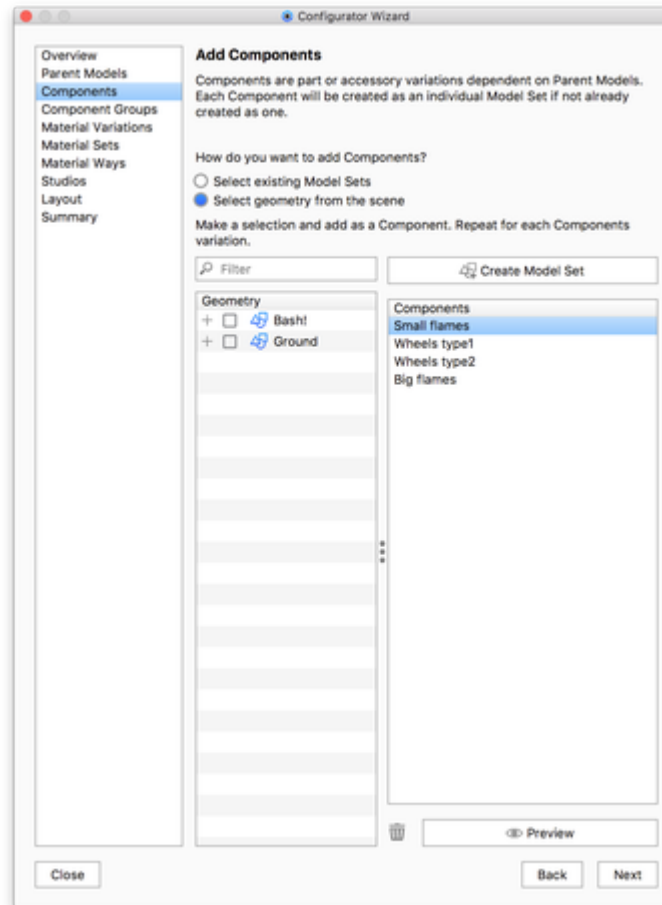

Component Groups

If you have defined Components you will next need to add Component Groups. These define the relationship between Parent Models and their dependent Components.

Component Groups

A Component Group can be seen as the choice, where the components are the options. You can also select *None* as an option if you wish to display the Parent Model with no Component. In this example of a car with wheels it would not make sense to do so.


Parent Models can have several Component Groups - e.g. a Car can have a choice of different wheels and different grills.

Add Component Groups

Simply click the inline link to *Add Component Group* and check the respective Components in the list on the right. Repeat this until all relationships are defined. You can also select *None* as an option if you wish to display the Parent Model with no Component. In this example of a car with wheels it would not make sense to do so.

Remove Component Groups

To remove a component from the component group uncheck in the Components list. To remove a Component group, right-click the group and select delete.

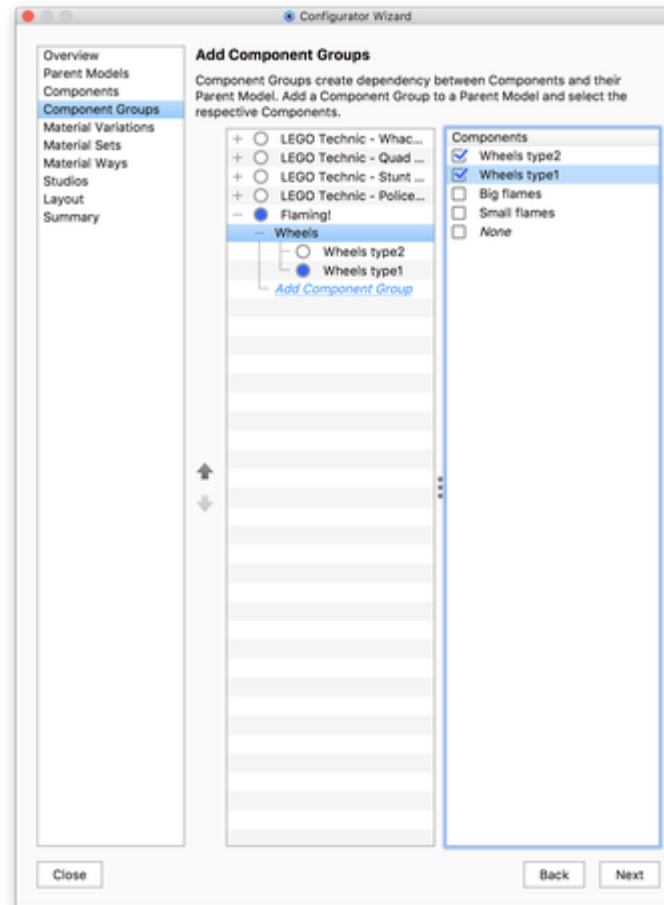

Material Variations

In this step you can add further materials to existing Multi-Materials or convert "simple" materials to Multi-Materials

The List displays all the Multi-Materials in the current scene. When you click one of the multi-materials, the lower list (pictured in the example at the right) will display all materials it consists of.

Add to existing Multi-Materials

To add to an existing Multi-Material simply click the material in the list and drag new materials from the *Library* and drop them into the lower list.

Add New Multi-Materials


New Multi-Materials are added by selecting the desired material/part in the *Real-time View*, then dragging and dropping materials into the lower list. You will then see the material spheres populate the list to select and preview.

Once materials are in the list you can give the Material Variation a name i.e. Wheel Accent. This material will become a Multi-Material in your scene that can also be accessed and further edited from the *Material tab*.

Remove Material Variations

To remove variations from a Multi-Material select the Multi-material either in the list or by selecting a part (with the material) in the Real-time View. Now the bottom list shows the variations of the Multi-Material. Select the variation

you want to remove and click . You can repeat this until there is only one variation left, reverting the Multi-Material to a single material.

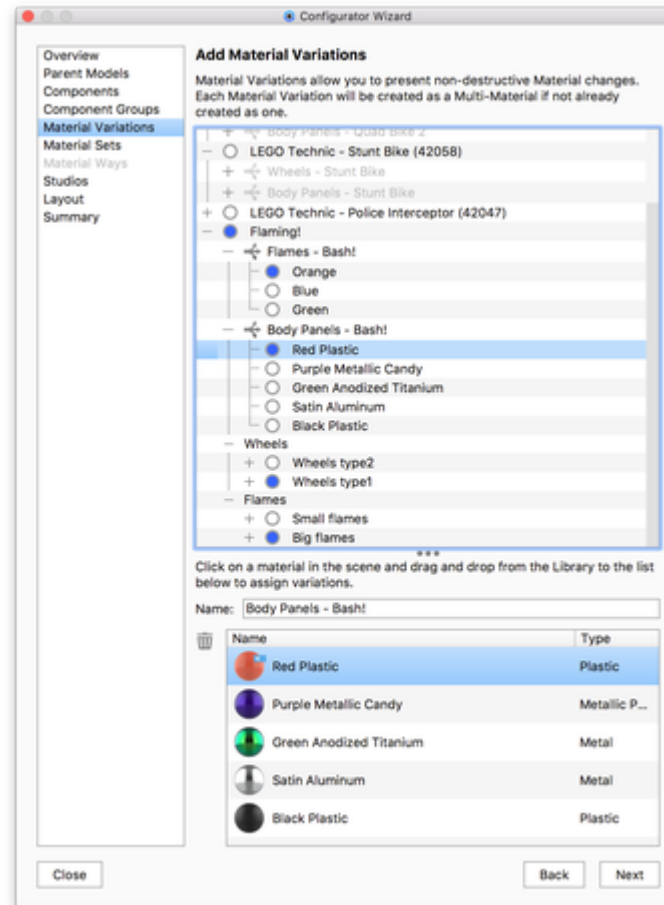

Material Sets

With Material Sets you can group Multi-Materials that you want to be able to change concurrently with Material Ways.


Click *Create New Material Set* and check the Multi-Materials you want to group.

Once a Material Set is in the list you can rename it.

You can have multiple Material Sets but a Multi-Material can only be a part of a single Material Set. Any Multi-Materials that are already a part of a

Material Set will be disabled in the list.

To delete a Material Set, select it in the list and click , this will make the Multi-Materials available for re-selection.

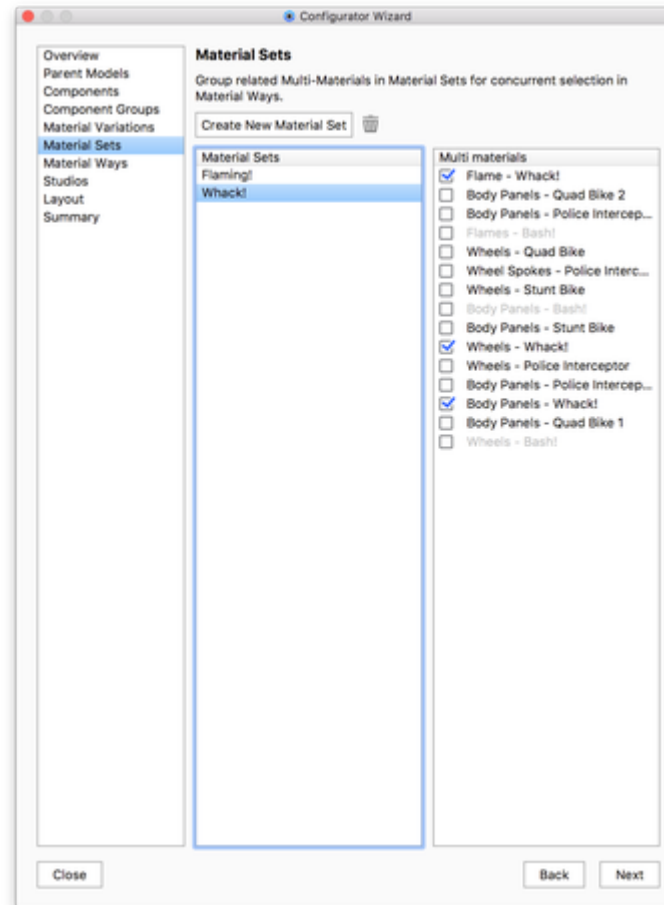


Material Ways

Material Ways are the options within a Material Set.

Select a Material Set in the drop-down and click *Add Material Way*. Then select the material combination you want in the current Material Way, by marking them with the blue bullet.

Make sure to give each Material Way a useful name, as they will be used in presentation mode/KeyShot Viewer.

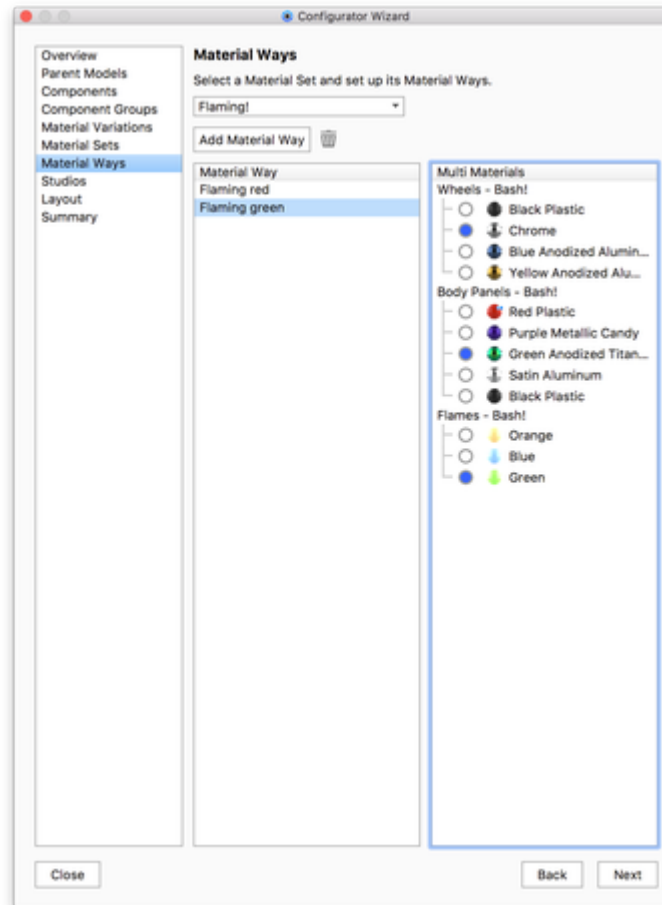

Studios

Studios can be enabled in order to change preset Cameras, Environments Image Styles and prop/scene geometry created as Model Sets.

Select which Studios you want included in the presentation by checking/unchecking them or add a new studio if necessary.

If no studios are selected, the Studios tab in presentation mode will not be displayed and the presentation will use the current environment and camera position.

Camera


You can lock/unlock the Camera by clicking the lock icon next to the camera drop-down. If a Studio contains a locked camera, it will also be locked in presentation mode and the user will not be able to tumble/pan/dolly. In Presentation mode this is shown by a small lock icon in the top right corner.

Model Sets and Multi-materials

Any Model Sets/Multi-Materials that can be set as a part of the configuration will be ignored when you switch Studio in the presentation, even if they are set up to belong to a Studio. This means that only "prop" Model Sets/Multi-Materials can be displayed/hidden/changed with Studio switch.

Thumbnails

If the default thumbnail that is generated does not contain the elements you want displayed, you can select which Model Sets to include in the drop-down at the bottom of the page and re-render the thumbnail.

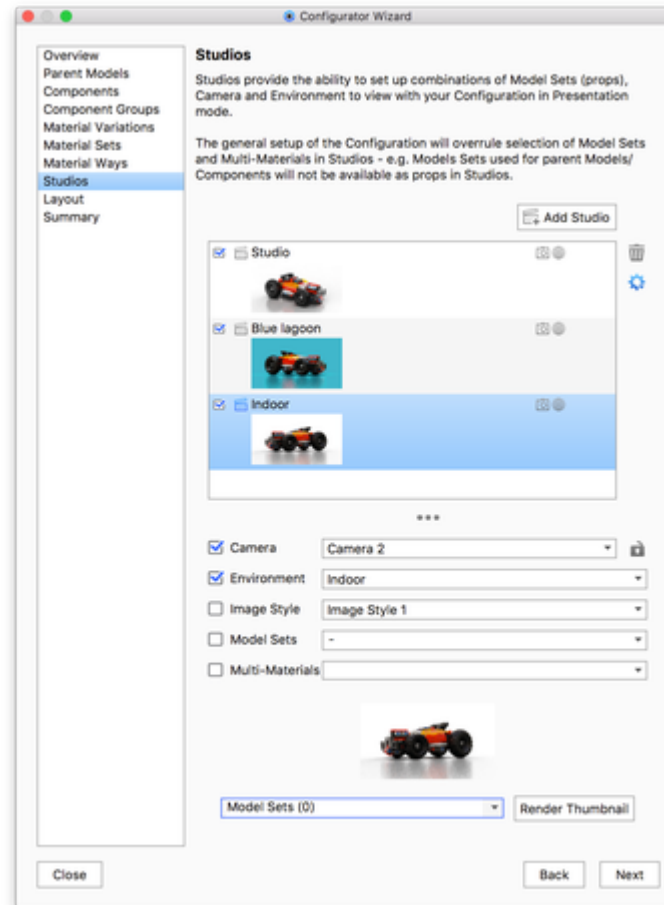

Layout

The Layout section is where you define the style of Presentation Mode for each given Configurator scene. You can choose between a Compact toolbar or Touch Friendly thumbnail interface.

When using the Touch Friendly mode you can set the size of the panels, and adjust thumbnail sizes.

Preview

The optimal size values, button and tab visibility, and tab names will vary

from scene to scene. Preview lets you see your edits while you are making them.

Style Sheet


The Style Sheet editor lets you adjust the appearance of Presentation mode.


Note:

If you have created a configuration in KeyShot 7, where you have adjusted the style sheet. You may need to update it when you open the scene in KeyShot 8, as the layout in presentation mode have been updated.

Render All Materials


The first time a material is present in the configuration a thumbnail is automatically rendered, but if you have made changes to your materials you may need to re-render.

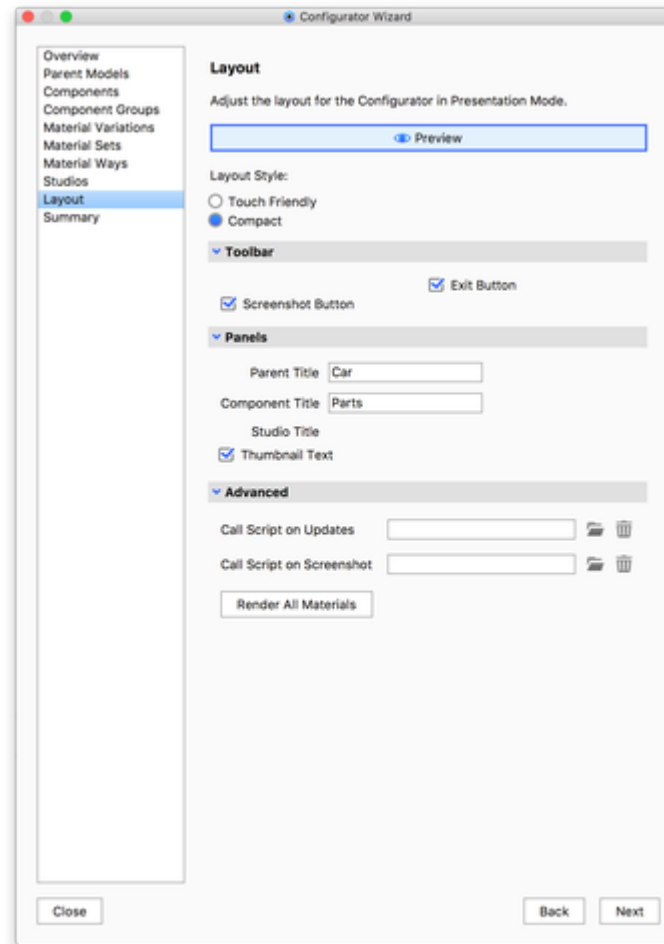

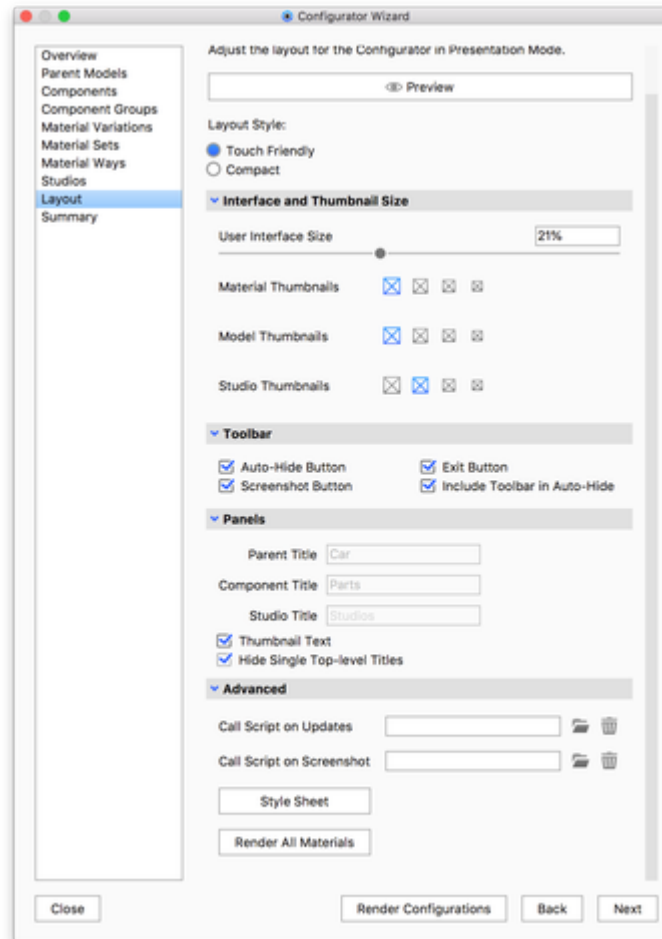

Summary

The Summary section allows you to see an overview of the number of variations in your Configurator and to preview each of the variations in the Real-time View before entering Presentation Mode. You can reorder Model and Material variations from this page by selecting the item you want to move and using the arrows to the left of the list.

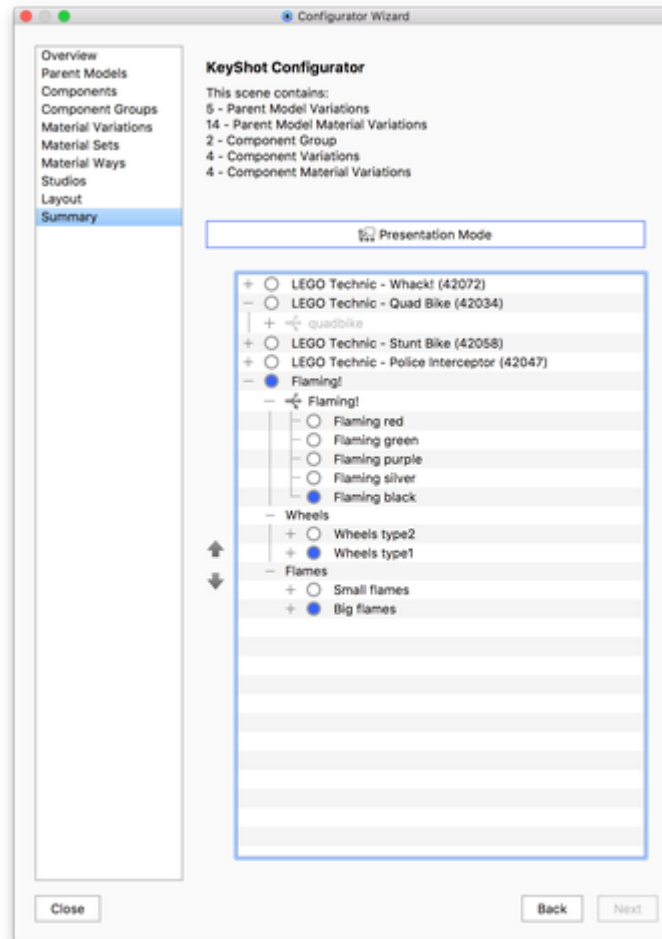

Using the KeyShot Configurator

In the this video, we show how to use the KeyShot Configurator to present model and material variations in real-time for design reviews or touch-enabled customer experiences.

This video was made for KeyShot 7. In KeyShot 8 a few things have changed, but the video gives a good overall idea about the Configurator and how to use it.

KeyShot Viewer



What is it?

KeyShot Viewer is a free, stand-alone, touch-enabled, desktop application for Mac and Windows that enables KeyShot scenes to be securely shared with anyone for interactive viewing, presentation and configuration. KeyShot Viewer uses the same CPU-powered ray-tracing render engine as KeyShot to produce amazing photo-realistic visuals in real-time.

How it works

Downloading, installing, and opening files

KeyShot Viewer can be downloaded at keyshot.com/viewer by entering your name and email address. Once KeyShot Viewer is installed you'll be able to open any KeyShot Package file (.ksp) to interact with the scene.

When KeyShot Viewer is launched you'll be prompted with a splash screen where you can browse to open a file or select from those recently opened.

You can also open .ksp files by dragging and dropping onto the splash screen, into the KeyShot Viewer application window or by the file menu if a scene is currently open.



The file menu is accessible when the application is in a windowed state, which can be reached from full-screen presentation mode by pressing the *Esc* key or clicking the  exit icon. To enter full-screen presentation mode again, maximize the window or click the  presentation mode icon.

KeyShot viewer comes with 2 demo scenes. Additional configurator scenes can be found [here](#).

On this page

- What is it?
- How it works
 - Downloading, installing, and opening files
 - Moving the camera view
 - Studio, Model, and Material variations
 - Taking a Screenshot
- FAQs

Note: This video is made for KeyShot Viewer 7. The Layout has changed slightly in KeyShot Viewer 8.

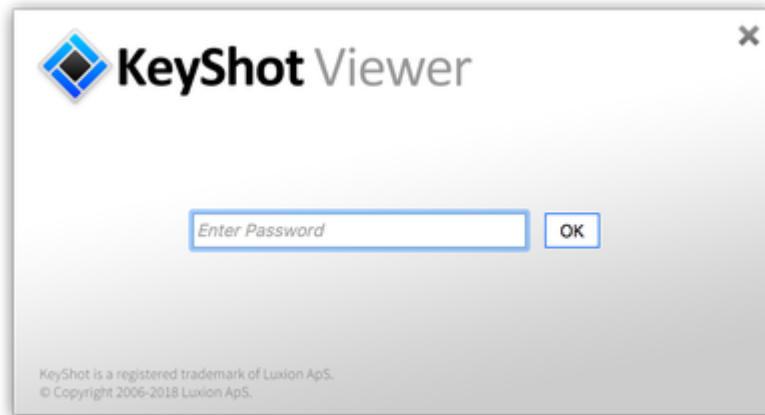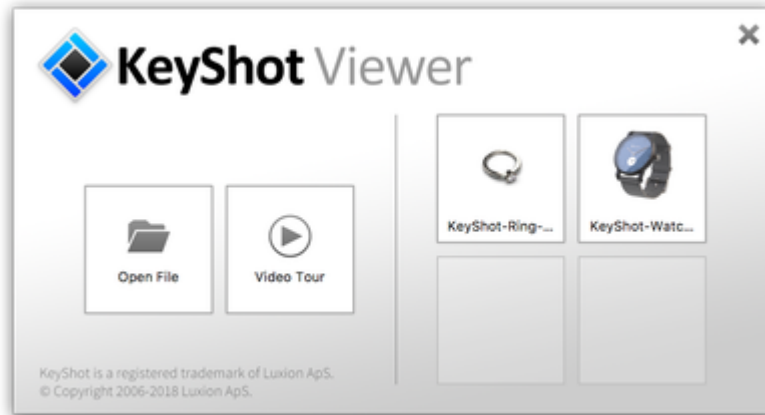

Depending on how the scene was saved from KeyShot Pro you may be prompted to enter a password.

Moving the camera view

When you move the camera view or make changes the scene will update instantly - with the image quality improving as you let it sit until 256 samples has been reached.

To move the view, simply use your mouse or finger on a touch-enabled device. The *toolbar* has three icons indicating if  tumble,  pan, or  dolly is active for the left mouse button or single-finger input.

If you're using a mouse you can also pan using the middle mouse button and dolly using the middle mouse wheel or by scrolling on a touch-pad. To

reset the view click the  camera reset icon on the *toolbar*.



The KeyShot Watch Configurator demo scene is included in the KeyShot Viewer installation.

Studio, Model, and Material variations

Users of KeyShot Pro can use the *Configurator* to include Studio, Model, and Material variations, which will be available when KeyShot Viewer is in full-screen presentation mode. Simply click or tap on any of these variations to update the real-time view. Use the tabs to navigate the various options that have been setup in the scene.

For information about using the Configurator in KeyShot Pro to setup Studio, Model, and Material variations for output to KeyShot Viewer [click here](#).

The  *auto-hide* icon allows you to hide the Studio, Model and Material variation panels after 10 seconds of inactivity. To show again simply mouse over or tap in the area the panels occupy.




KeyShot Pro allows you to present a configurator for unlimited Studio, Model and Material variation.

Taking a Screenshot

If included in your scene, click or tap the  *screenshot* icon on the *toolbar* to save an image. If your scene includes watermarking it will also be included in screenshot output; however, the UI panels will not.

By default screenshots will be saved in your documents folder. In *Preferences* you can select another destination folder or choose to be asked for destination every time you take a screenshot. To find *Preferences* on Windows click *Edit, Preferences...* and on Mac *Keyshot, Preferences...*

The Viewer can also output a metadata file in XMP or .meta format. The metadata file indicates which variations are active along with camera information that can be referenced to make changes to the original scene back in KeyShot. You enable/disable metadata output in preferences, where you can also choose the format by clicking the  gear icon.

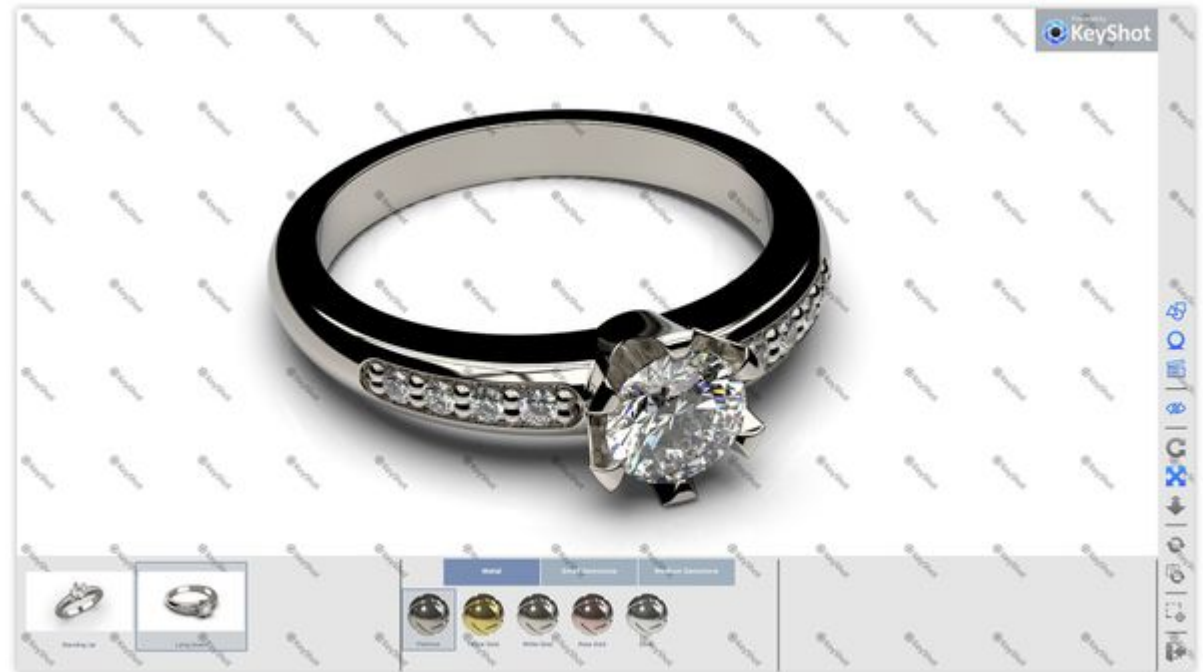

The option to add watermark is included when exporting a KeyShot Scene for KeyShot Viewer.

FAQs

1. How do I remove the watermark logo pattern?

The inclusion of the KeyShot watermark logo pattern is defined when saving for KeyShot Viewer from KeyShot Pro. You will need to ask the provider of the file to remove this.

2. How do I remove the "Powered by KeyShot" logo in the upper right corner?

The inclusion of the "powered by KeyShot" logo is defined when saving for KeyShot Viewer from KeyShot Pro. You will need to ask the provider of the file to remove this.

3. I see a message "Camera is locked". How do I unlock it?

The camera state is defined in KeyShot Pro. You will need to contact the scene provider to get a version of the scene that is saved with the camera in an unlocked state.

4. What if I don't know the password to open a scene?

You will need to contact the provider of the scene.

5. Why is my real-time view not using the entire screen space?

In order to be efficient about CPU usage the real-time view in KeyShot Viewer is limited to 1920x1080 resolution. If you wish to take advantage of the entire screen space on high-resolution displays you will need to use Presentation Mode in

KeyShot Pro.

6. **How do I know if I'm using the latest version of KeyShot Viewer?**

If there is an update to KeyShot Viewer available a notification will appear on the splash screen.

7. **Where are the Watch and Ring demo scenes located on my computer?**

Windows: C:\Users\Username\AppData\Local\Luxion\KeyShot Viewer 8

Mac: Library/Application Support/KeyShot Viewer 8

8. **Why does it say "Rendering Complete" at the top of the screen?**

The real-time view will not render more than 256 samples so the CPU isn't continuously used when KeyShot Viewer is left sitting.

9. **Does KeyShot Viewer support Animation?**

No. A file loaded with Animation included will show the scene at 0s and cannot playback any Animations.

Virtual Reality

KeyShot allows you to experience both real-time rendering mode and rendered visuals in virtual reality (VR) using a VR headset. This section describes how to setup and use VR hardware with KeyShot.



In this section

- [VR Overview](#)
- [Render VR Images](#)
- [Work In Real-Time VR](#)



VR Overview

The VR capabilities in KeyShot allow you to use VR devices, such as the Oculus Rift and the HTC Vive, to view KeyShot scenes. There are two applications for using VR with KeyShot:

1. Render VR Images

View rendered panoramic images rendered in KeyShot. This mode is compatible with any type of VR device capable of viewing VR images. Please check with the manufacturer of the device to know what type of image is necessary. [Learn more](#)

2. Work in Real-time VR

View and render the Real-time View through the VR headset. This mode is compatible with the *Oculus Rift* and the *HTC Vive* only. [Learn more](#)


Accessing KeyShot VR Settings

VR capabilities are a KeyShot Pro feature. ([Compare KeyShot versions](#).) All VR settings are accessed from the *Project* window, *Camera* tab, under the *Lens Settings* and *Stereo* sections.

Terminology

Cube Map

- In this mode, six views will be rendered side by side.
 - The views are: Front, Back, Right, Left, Top, Bottom.
- If your device supports stereo cub maps it will automatically orient the images for you to view them correctly.

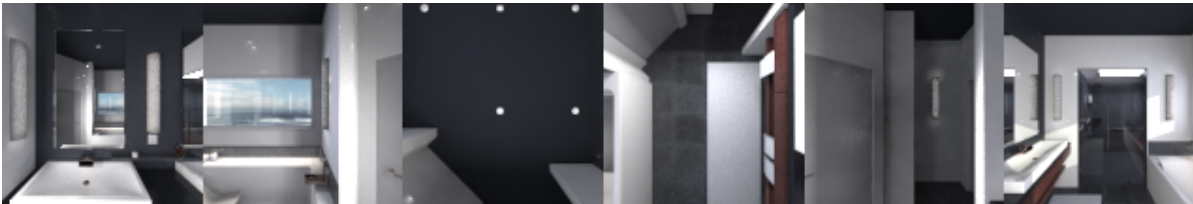

Spherical

- As described by the name, this image will look like a flattened out sphere.
- This mode will be compatible with most devices out there.


On this page

- [Accessing KeyShot VR Settings](#)
- [Terminology](#)
 - [Cube Map](#)
 - [Spherical](#)
 - [Side-by-side](#)
 - [Over-under](#)
 - [Eye Distance](#)
 - [Pole Merging Angle](#)



Side-by-side

- In order to see the image in 3D via the headset, you need to have the same image played in both eyes. In this mode both images are stitched next to each other.

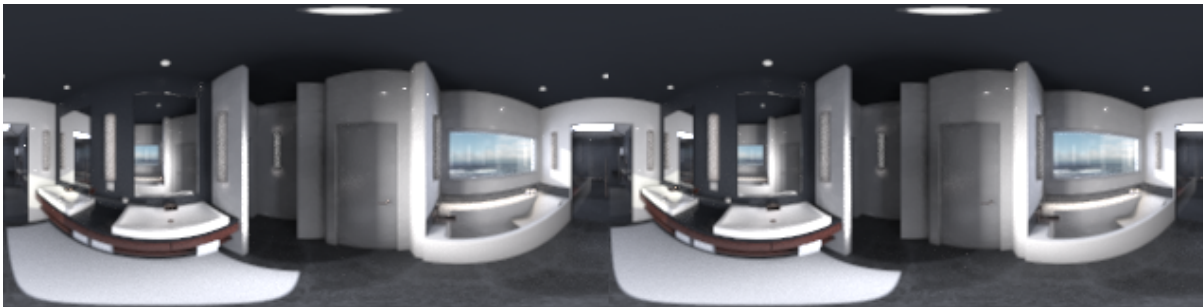

Over-under

- In order for you to see the image in 3D in the headset, you need to have the same image played in both eyes. In this mode both images are stitched one on top of the other.

Eye Distance

- This is to set the distance between your eyes. This is a setting that you configured when setting up your Oculus Rift or HTC Vive. Use the same distance set when setting up your device.

Pole Merging Angle

- This is a parameter for stereo rendering. It is the angle at which pole merging begins. It helps avoid artifacts when looking upward and downward. The eye distance value is kept the same until the viewing angle reaches the specified angle after which the eye distance is gradually decreased until it reaches a value of 0 when looking directly downwards or upwards.

Render VR Images

This section will guide you through the steps necessary to render out an image to view on a VR head-mounted display:

1. Open and setup the scene of your choice in KeyShot.
2. Go to the *Project* window's *Camera* tab and open the *Lens Settings* accordion.
3. Select *Panoramic* mode.
4. Depending on the type of VR device you have, you may need to select *Cube Map* or *Spherical*, i.e. Oculus Rift and HTC Vive can use both, but Google Daydream needs a Spherical image.
5. Enable the *Stereo* radio button.
6. Go to the *Render* menu by using the *Render* button in the toolbar or by going to the top menu under *Render*, *Render...*
7. Render the image as you would any other image. Keep in mind that you will be "immersed" in the scene, so the bigger the image resolution the more realistic it will look.
8. Upload your rendered image to your headset to view the VR image. This step can be different for each VR headset device. Please consult the headset manufacturer for specific instructions for loading a VR image.

Related Pages

Content by label

There is no content with the specified labels



Work In Real-Time VR

This section will guide you through the steps necessary to view the real-time window through a VR head-mounted display:

- This will only work with the Oculus Rift and the HTC Vive.
- These instructions assume that you have the Oculus Rift or the HTC Vive already installed and ready to go.
- These instructions assume that you are wearing the Oculus Rift or the HTC Vive HMD.

Perspective Realtime View

1. Open and setup the scene of your choice in *KeyShot*.
2. Go to the *Project* window's *Camera* tab and open the *Lens Settings* accordion.
3. Select *Perspective* mode.
4. Enable the *Stereo* radio button.
5. You can change the stereo settings if you know specifically what you need or you can just leave the default settings the way they are.
6. Click on the *Head-Mounted Display* drop-down and choose which VR device you have. For the Oculus choose *Oculus Rift* and for the HTC Vive, choose *OpenVR*.
7. It might take a few seconds for the VR device's software to load but you can now put your headset on to view your scene.

Panoramic Real-time View

Workflow 1:

1. Open and setup the scene of your choice in *KeyShot*.
2. In the top menu, go to *Camera Enable VR*.
3. Choose between *Cube map mode* or *Spherical mode*.
4. Choose your desired resolution. Keep in mind that the higher you go the more powerful your machine will need to be. For example, if you are working on a laptop, you should stay at lower resolution.
5. Choose which VR device you have. For the Oculus choose *Oculus Rift* and for the HTC Vive, choose *OpenVR*.
6. Click *Start*. (It might take a few seconds for the VR software to start)

Workflow 2:

1. Open and setup the scene of your choice in *KeyShot*.
2. Go to the *Project* window's *Camera* tab and open the *Lens Settings* accordion.

3. Select *Panoramic* mode.
4. Choose between *Cube map mode* or *Spherical mode*.
5. Enable the *Stereo* radio button.
6. You can change the stereo settings if you know specifically what you need or you can just leave the default settings the way they are.
7. Click on the *Head-Mounted Display* drop-down and choose which VR device you have. For the Oculus choose *Oculus Rift* and for the HTC Vive, choose *OpenVR*.
8. It might take a few seconds for the VR device's software to load but you can now put your headset on to view your scene.

KeyShot Cloud

KeyShot Cloud is an online library where you can share your own custom materials and resources, as well as having access to resources uploaded by other KeyShot users.

You can access Keyshot Cloud here: <https://cloud.keyshot.com> - or launch it inside KeyShot via the KeyShot Cloud icon  in the bottom left corner of the Toolbar.



In this section

- [KeyShot Cloud User Interface](#)
- [KeyShot Cloud Account](#)
- [KeyShot Cloud Search](#)
- [Uploading/Downloading Resources](#)
- [KeyShot Cloud Release Notes](#)

KeyShot Cloud User Interface

1. Search Field
2. Display Style
3. User account/settings
4. Category Tabs
5. Total number of resources within a category
6. Search Results, the number shows how many search results there are within the category.
7. "Download" Button
8. "Like" Button
9. Details
10. "Report" Button.

1

glass

Browse

All time

2

3

4


47

1

5


1913

6




Carbon Fiber Matte Finish

378 7 5




Carbon Fiber Polished

336 28




Primi-Transparent Preal on GL...

271 1




Primi-Glitter in glass

592 6




Primi-Metal rock coat glass

1560 19




Architectural Crystal (Solid)...

999 6




Carbon Fiber Gloss Detail

205 0




Rootbeer Tortoise

728 4



Procedural Clear Coated Carbon Fiber

2849 37

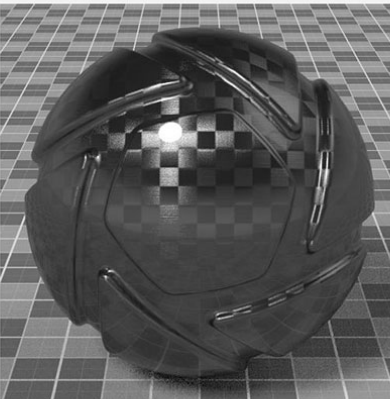

Procedural Clear Coated Carbon Fiber

9

Uploaded: March 31, 2017

Compatible with KeyShot 6 +

By: Esben Oxholm

8

Like

Procedural Clear Coated Carbon Fiber. Not 100% realistic looking. Might work for your specific project anyways :)

Tags: [procedural](#), [clear](#), [carbon fiber](#), [fiber](#), [fiberglass](#), [carbonfiber](#), [carbon](#)

Size: 25.80KB

7

Download

2849

37

10

KeyShot Cloud Account

You only need an account if you want to upload or like resources.

Login/Create Account

Create an account by clicking the  user icon in the top right corner of KeyShot Cloud and click *login* - On this page you will find an option to register.

If you are not logged in when trying to upload or like you will be asked to login/register before you can proceed.


Log Out

To log out, click the settings icon in the upper right of KeyShot Cloud window and click *Log out*.

Delete Account

If you for some reason want to delete your account, just login, click on *Account Settings* in the dialog click *Delete My Account*.

When your account is deleted Luxion will delete any information that can be associated with you and resources uploaded by you will be redelegated to a Luxion account.

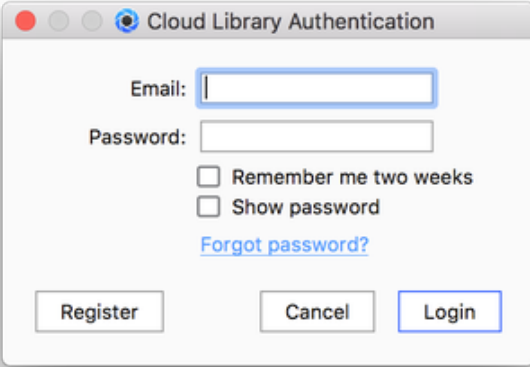


A screenshot of a macOS-style dialog box titled "Cloud Library Authentication". It features a title bar with standard window controls (red, yellow, green buttons) and a blue icon. The dialog contains two text input fields: "Email:" and "Password:". Below the "Password:" field are two checkboxes: "Remember me two weeks" and "Show password". A blue hyperlink "Forgot password?" is positioned below the checkboxes. At the bottom, there are three buttons: "Register", "Cancel", and "Login". The "Login" button is highlighted with a blue border.

KeyShot Cloud Search

KeyShot Cloud has robust search capability. You can use the filters or do a more advanced search using our search syntax.


Sorting and Filters

The search results may be organized using the *Order By* and the *Results Since* dropdown menus.

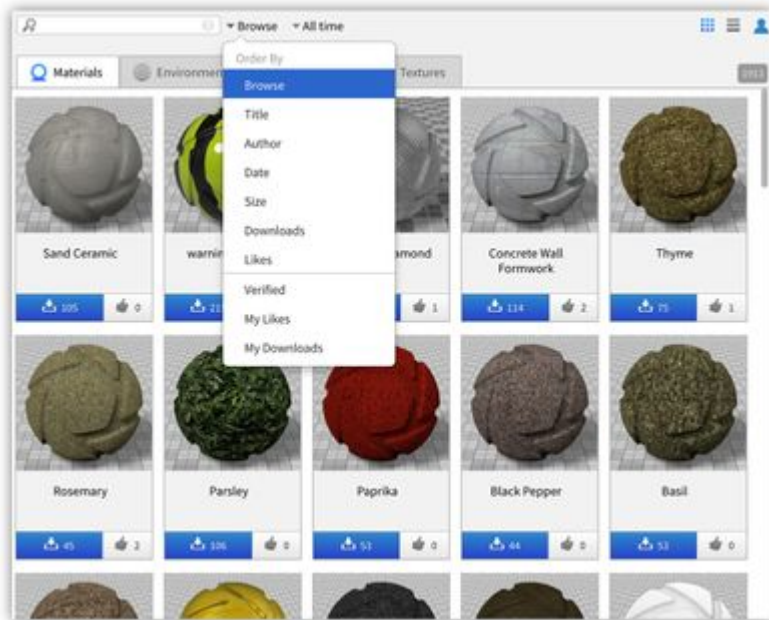

On this page

- [Sorting and Filters](#)
- [Search Syntax](#)
- [Resource Details](#)
 - [Compatible Version](#)

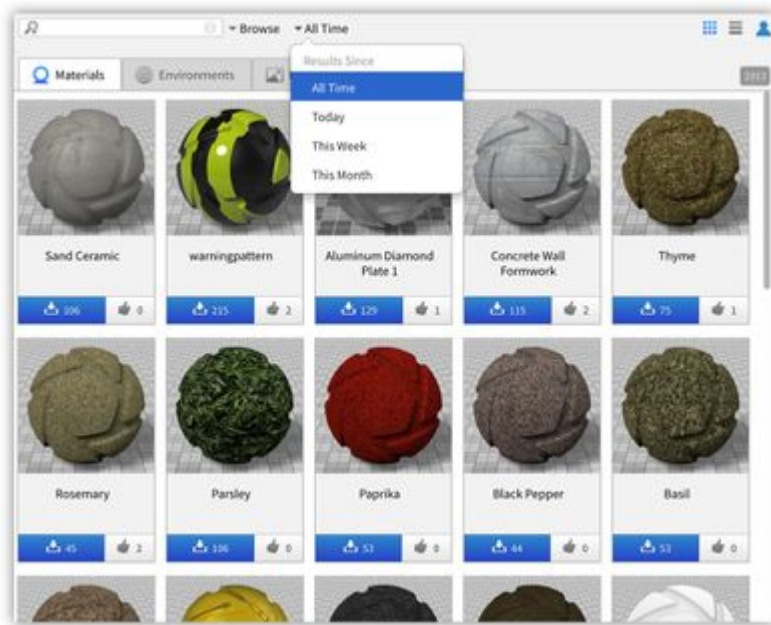

Search Syntax

If you want to perform a more specific search you can use search syntax.

- Normal Search: *term*
- User Search: *@username*
- Include: *+term*
- Exclude: *-term*
- User Likes: *L@email/username*
- User Downloads: *D@email/username*
- Resource ID search: *#resource ID*
- Search phrase: *"Search phrase"*


You can find examples of the search syntax by clicking the little question mark in the search field.

Resource Details

Click on a resource entry to bring up the details of that specific resource such as the size, description, tags, creator, and more. The details section will also contain the *Download* button to download the resource to your KeyShot Library, as well as a *Report* button to flag any resource as offensive or copyright-infringing material.

Compatible Version

When you access KeyShot Cloud from KeyShot, the resources will only be shown if they are compatible with the current version of KeyShot. If you are browsing directly on the site, see the resource details for information about compatible version.

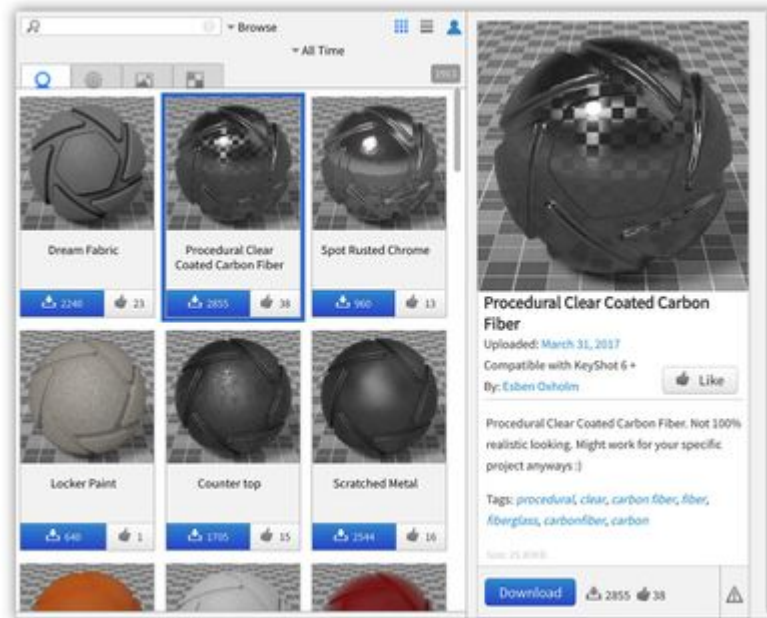

Uploading/Downloading Resources

Uploading Resources

To upload your custom resources to the Cloud Library,

- Select the resource(s) you want to upload and click the *Upload* button on the bottom right of the KeyShot library panel. Alternatively you can right-click the resources and select *Upload To Cloud Library*.
- If you are not yet logged in you will be asked to do so.
- Describe the resource, edit the name if necessary and add tags to help other users search for your resource. If you don't know what tags to use, you can click *Suggestions* and KeyShot will auto-generate tags for you. The check mark icon next to the input fields will let you know if your input is OK.
- Click *next* to input information about the next resource, if any.
- The final step displays a confirmation of resources to be uploaded - Click *Upload* to send your resource to the cloud.

Note


The name may not include special characters and these will be ignored when typed.

Upload Guidelines

To ensure the quality of resources in the KeyShot Cloud remains high, all resources will have to be approved by Luxion staff before they will be available on the Cloud. This will be done within 48 hours.


The approval procedure considers both the quality of the resource and the name and description. If you want to know the guidelines you can always find them in the bottom left corner of the upload dialog.

It is not possible to upload KeyShot stock resources, Procedural Environments, and Multi-Materials to KeyShot Cloud.

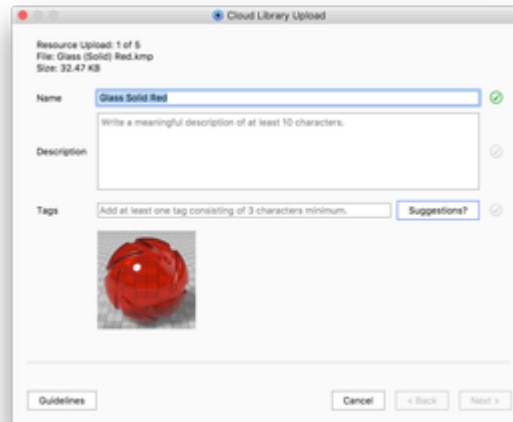

On this page

- [Uploading Resources](#)
 - [Upload Guidelines](#)
- [Downloading Resources](#)

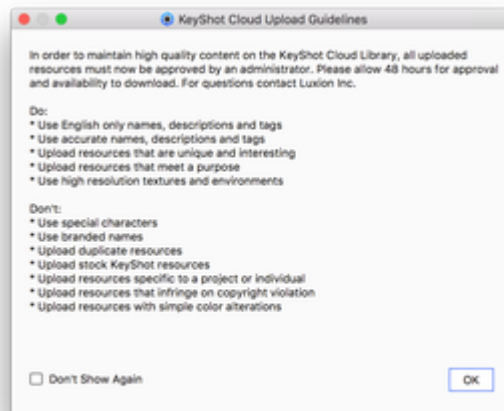

Downloading Resources

To download a resource, click the blue *Download* button on the resource in the overview or in the resource details. You can also drag-and-drop the resource on the Real-Time View.

If you are accessing KeyShot Cloud outside KeyShot, KeyShot will be launched and the downloaded resource can be found in the *Download* folder.

The resource will be automatically downloaded to your downloads folder in the appropriate tab, and you will then be able to move it to an existing or custom folder.

KeyShot Cloud Release Notes

1.1.2

This is a rejuvenated version of KeyShot Cloud which has a lot of updates, fixes, and improvements since version 1.0.25.

- KeyShot Cloud launches directly in the KeyShot user interface as a dockable window (KeyShot 8 only).
- When viewing in KeyShot, it only shows materials that are compatible with the version of KeyShot.
- Login is no longer needed to browse the site and download resources! (It is, however, needed for uploading new resources and for user actions such as liking assets or browsing likes and downloads.)
- Login prompt shown instead of redirecting to login page (when not shown inside KeyShot).
- Correctly identify if site is running inside KeyShot or not.
- "My Downloads" and "My Likes" browse options show only when logged in.
- Download link exposed on download button.
- Support searching for resources via ID: #ID. Example: #123
- Removed upload modal dialog - now located in KeyShot.
- Use active type for initial resource count instead of always materials.
- Simplified registration process to avoid confusion.
- Simplified password reset (account recovery) process to avoid confusion.
- Dragging the thumbnail, in details view, to KeyShot will drag the link instead.
- Toggle password visibility for login.
- CSS fallbacks to support KeyShot v5 (older web engine).
- Show compatible KeyShot version for materials in details view (though it's hidden for version <= 5).
- Commenting has been disabled.
- Squashed various bugs.
- General improvements.

1.0.25

- Implemented account deletion under account settings in relation to GDPR.
- Updated thumbnail generation.
- Various other fixes.
- Approval process for newly upload resources.


Release note version
• 1.1.2 • 1.0.25

Network Rendering

KeyShot Network Rendering allows you to connect multiple computer systems in your office network and utilize the available hardware to reduce rendering times significantly. In fact, the correlation between render time and number of cores in your network is approximately linear and inversely proportional. In other words, by doubling the number of cores you potentially cut your render time in half.* In addition, rendering over the network is convenient. You may continue working in KeyShot or any other application without slowing down your system while the designated rendering stations process your render “jobs”.

The KeyShot Network Rendering software is compatible with Mac and PC systems.

The more cores you have, the faster your images and animations will render.**

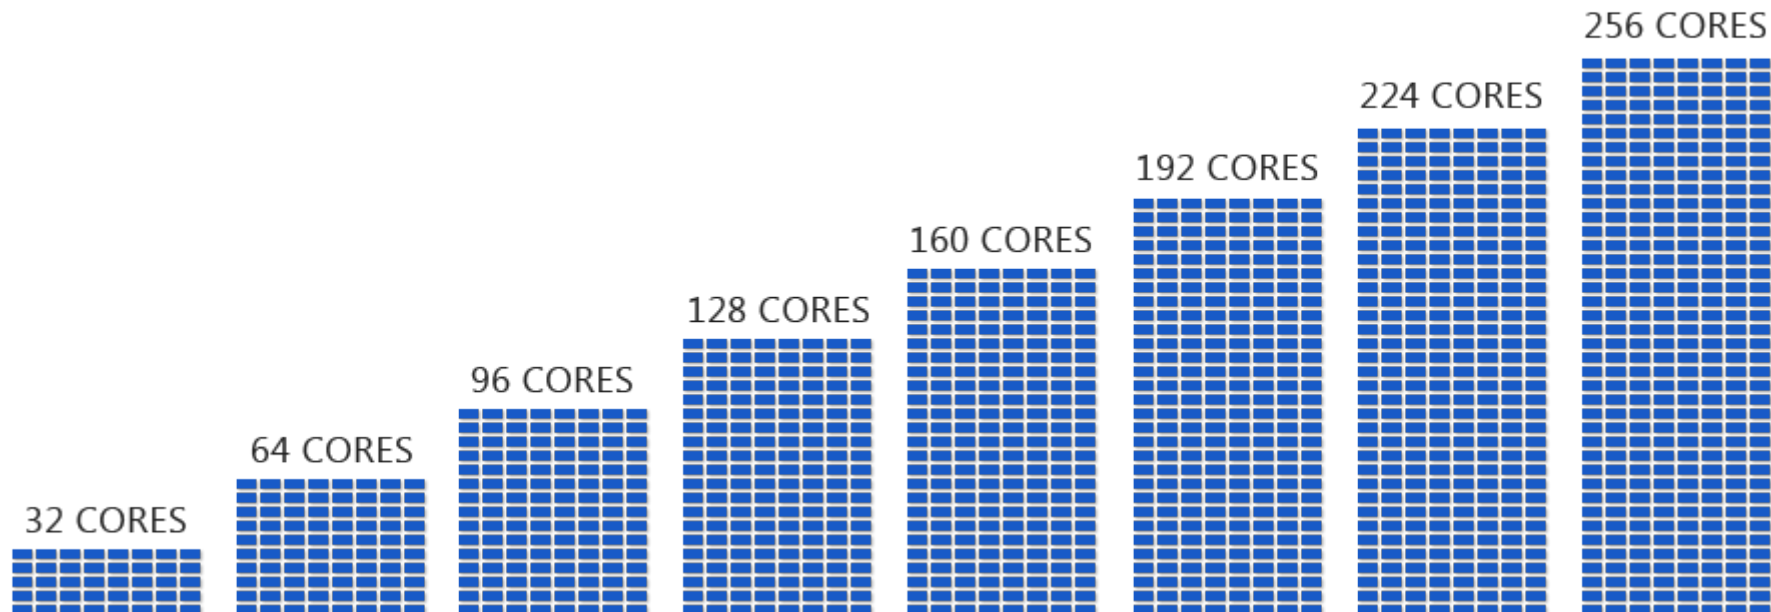

** Please note that this is an approximation under optimal conditions. Render times are subject to hardware specs, core count differences between slaves, scene complexity, unit of time, multi-tasking, and network traffic.*

*** Please note that Luxion does not sell or rent cores. All computer hardware (i.e. processor cores) is provided by the customer.*

More on KeyShot Network Rendering and Network Rendering Installation can be found in the KeyShot 8 Network Rendering Manual.

[View KeyShot 8 Network Rendering Manual](#)

Preferences

This section describes where to find the KeyShot *Preferences* (options/settings) and what they do.

You can find the KeyShot *Preferences* in the Main Menu

- **Windows:** *Edit, Preferences...*
- **Mac:** *Keyshot, Preferences...*

After making changes, make sure to select the *Save Changes* button. In some instances you maybe required to restart KeyShot in order for the changed settings to take effect. To prevent any changes from taking effect simply select the *Cancel* button.

The follow sections describe what preferences are available in each tab of the *Preferences* window.

In this section

- [Interface Preferences](#)
- [General Preferences](#)
- [Folders Preferences](#)
- [Plugins Preferences](#)
- [Color Management](#)
- [Hotkeys Preferences](#)

Interface Preferences

Interface

Language

Select the desired language in the menu.

Theme

Select desired color for the KeyShot interface. This can also be set from the *Ribbon > Workspaces* drop-down.

Font Size

Select the desired font size in the drop-down. This is useful when working on high-resolution displays without system scaling applied.

Selection outlines

Displays an orange outline around selected parts.

Use CPU for selection outlines

Enable this if selection outlines are unstable on GPU.

Include camera changes in undo/redo

This will include all camera movements in the undo stack.

Reverse camera distance scrolling

Reverse the scrolling on the camera when dollying the camera.

Enable sub menus in Real-time View

Rather than showing a list of functions in the right click menus, these functions will be logically grouped into sub menus.

Disable scene tree hierarchy changes

Prevents you from making any changes to the scene tree hierarchy by dragging and dropping parts.

Lock pivot to target

When it is enabled the pivot moves with the target when you pan the camera.

Scene Tree object preview tooltips

When checked you will see a spinning OpenGL shaded preview of an object when hovering over it in the scene tree.

Respect animation ordering

If you perform multiple animations on a part/group any translations will by default be executed last, as this will move the pivot point. With this setting you can force the animation to respect the order set in the Scene Tree (top to bottom).

Show support tool in Help menu

Enable the support tool for support troubleshooting purposes.

Use GPU (enable effects)

When checked, enables the *Bloom*, *Vignetting* and *Chromatic Aberration* effects under *Project* window, *Image* tab, *Image Styles*.

Progressive Image Sampling

When checked, KeyShot will down-sample the scene while the camera is moved to enable faster performance. On machines with many cores this function may be turned off to ensure a smooth camera movement without loss of quality.

Disable outline for large models

On this page

- [Interface](#)
- [Materials](#)
- [Log](#)
- [3Dconnexion Settings](#)

Makes it possible to disable selection outlines based on the size of the model. *Auto* will disable the outlines based on the available GPU memory and *Custom* will disable them when your model reaches the specified amount of triangles.

Render Output window memory limit

This controls the amount of memory reserved for the image buffer in the output window. If the rendered image takes up more memory than this limit, it will be downscaled until it is below the limit. This is useful if you are rendering gigapixel images and your scene takes up a lot of memory. It does not affect the output image itself (as specified in the Render Settings), but does affect images saved directly from the output window.

Materials

Show in-project material list under material properties tab

All in-project materials will be displayed.

Use gloss instead of roughness for materials

Replaces all roughness sliders with gloss sliders and converts all roughness values to gloss values. Useful if you are working with a Gloss-meter to measure your materials.

Use UV mapping as default

Replace the default mapping type from *Box* to *UV-mapping*

Link materials of duplicate parts

When checked the material of duplicate parts will be linked. Learn more about linked materials on the [Assigning Materials](#) page.

Link duplicate materials when assigning from Library

When checked all instances of a material applied to parts in the scene will be linked. Learn more about linked materials on the [Assigning Materials](#) page.

Log

The log can be accessed under the [Help](#) menu in the KeyShot menu bar. It will contain a log of all errors that occurred while running KeyShot.

Threshold

This dropdown menu contains the lowest level of warning that will be captured in the log. Warning levels are: *Information* (default), *Warning*, *Critical*, *Fatal*.

Display log window on critical errors

When checked, the log window will open up automatically as soon as a critical error occurs.

History back buffer

Sets the number of entries in the log.

3Dconnexion Settings

KeyShot supports input devices from 3Dconnexion on both Windows and Mac. Make sure a 3Dconnexion device is connected in order to be able to change these settings. Learn more about [3Dconnexion](#).

3D mouse sensitivity

Set the sensitivity of the 3D mouse.

Restrict to dominant axis

Only allows one axis movement at a time.

Invert axis

Inverts camera movement direction.

Use global up axis

When checked (default) the camera will always rotate around the global up axis, even when tilted.

General Preferences

General

Show Welcome Window at Start Up

Displays a splash-screen at startup with recent scenes, demo scenes, news and info.

Adjust aspect ratio to backplate

Automatically resizes the *Real-time View* to the same aspect ratio of any backplate image that is loaded into the *Real-time View*.

Auto Update

Prompts you to download and run the update installer when a newer version becomes available.

Pause KeyShot when sending jobs to Network Rendering

Pause rendering in the Real-time View and stop the usage of your CPU when jobs are submitted to KeyShot Network Rendering.

Pause Real-time Render after time or samples

Select an amount of time or render samples to automatically pause the rendering in the Real-time View and stop the usage of your CPU.

Screenshots

Format

Select the format for the saved screenshot (JPEG or PNG).

Quality

Determines the compression of the saved image. Higher settings mean less compression yet better quality, but the file size will also increase. The default value is 99.

Include Alpha (Transparency)

If the format is set to PNG you can choose to include alpha, this will hide the lighting environment and make ground shadows transparent.

Ask where to save each screenshot

KeyShot will prompt you to specify a location when saving a screenshot from the *Real-time View*.

Save a camera with each screenshot

When checked, KeyShot will save a camera view for every screenshot that is saved out. These views can be accessed from the camera tab in the project window.

Save metadata with each screenshot

when checked, KeyShot will save metadata about the image. In the  settings drop-down you can choose the format of the metadata.

Default Startup Scene

This lets you set the default startup scene when you start KeyShot. The *startup.bip* scene is set as the default. Any KeyShot scene may be set as a startup scene. To change, simply click on the *Folder* icon  and browse to the scene you want

On this page

- [General](#)
- [Screenshots](#)
- [Default Startup Scene](#)
- [Backup Revision](#)
- [Save Reminder](#)
- [Cloud Library](#)
- [Clear don't show again](#)
- [Network](#)
- [LiveLinking](#)
- [Scripting](#)

KeyShot to load on startup.

Backup Revision

Create a serialized backup revision with each save

When checked, the [Revision Manager](#) will become enabled. KeyShot will create a serialized backup every time that you save rather than overwriting the scene. This results in a full copy of the original scene.

Backup history depth

Determines how many instances of the scene will be saved before the oldest one get overwritten. By default the value is 5. When the scene is saved a 6th time, the first (oldest) version of the scene will be overwritten. The maximum value is 99.

Save Reminder

Display save reminder notification every:

KeyShot will prompt you to to save at the interval selected. These times include every *5, 10, 15, 30* and *60 minutes*. Select *Never* if you do not want a *Save Reminder* to appear.

Cloud Library

This shows the login status for the KeyShot Cloud Library. Learn more about [KeyShot Cloud](#).

Clear Cache

Resets the KeyShot Cloud window to default, by clearing visited links, http cache and local storage.

Clear don't show again

Restore All Messages and Warnings...

All dialogs that can be disabled by marking "Don't show again" will be enabled and shown when applicable.

Network

This section allows the user to configure the proxy settings in order to communicate with Luxion's software update server and the KeyShot Cloud Library. This may be necessary when KeyShot is installed in environments with tight firewall security.

Proxy type dropdown

This dropdown menu provides four options: *No proxy*, *Automatic proxy detection* (default), *HTTP*, *SOCKS v5*.

Host

This option becomes available when *HTTP* or *SOCKS v5* are selected. Enter the hostname of the proxy server as recognized on the network, or the host's IP address.

Port

Enter the port the proxy server is using to communicate through the firewall.

Enable proxy authentication

It may be necessary to enable proxy authentication on the server. To do so, check this checkbox.

Username

Enter the user name that the user has been assigned to communicate with the proxy server.

Password

Enter the password for the user account on the proxy server.

LiveLinking

LiveLinking connects KeyShot to a modeling application via a custom plugin. When enabled, LiveLinking allows you to run KeyShot in parallel with supported 3D modeling software, and update the geometry inside of KeyShot without losing any of the material assignments, cameras, lighting, etc. All plugins developed by Luxion or a partner company may be found [here](#).

Enable LiveLinking

When checked (default), KeyShot will start and connect to supported 3D modeling software through the installed plugin. Note: these plugins for 3D software are different from [plugins](#) for KeyShot explained in the Preferences.

LiveLinking Network port range

This is the port range the installed plugin is using.

Scripting

This section provides the setting to take advantage of using local Python library installations for KeyShot's Scripting capabilities. Learn more about Scripting [here](#).

Use local Python paths

If checked, and if the user has Python libraries like PIL or SciPy installed locally, it will be possible to use those libraries inside of KeyShot. However, only version 3.4 is supported which is the same version that is being used inside KeyShot. If not checked, then only the Python modules exposed inside KeyShot will be available to the scripts running inside.

Folders Preferences

The folders tab allows you to specify folders or shared folders for following KeyShot Resources:

- Textures
- Backplates
- Environments
- Materials
- Renderings
- Scenes
- Animations (including KeyShotXR files)
- Material Templates
- Colors
- Scripts and Plugins.

Specify location for all folders

This option sets the default location for all resource folders

Resources

Select the folder icon  to set the default location for all KeyShot Resource folders.

Customize each folder

This option allows you to set the locations for each resource independently or add additional folders or shared directories.

Shared Folders

Shared folders will allow you to point KeyShot to access files in folders that are shared on a server or local computer. All shared folders will show inside of the KeyShot Library.

To use shared folders you will need to select *Customize each folder* and click the folder icon  to the right. The *Configure Folders* dialog will open. From there you can select the plus icon to add a new folder path. Selecting a folder and clicking *Edit* will allow you to edit the folder and change the path or switch to a default folder. At least one default folder is required for each resource.

On this page

- Specify location for all folders
- Customize each folder

Plugins Preferences

Plugins are primarily used for connecting KeyShot with various modeling applications. Most plugins will be executed in the modeling application but some will be run from KeyShot (e.g. OnShape). The Plugin Preferences are only concerning plugins that executed inside KeyShot.

Visit our [Plugins](#) page to see available plugins.

Plugins


Enable/Disable

The *Plugins* window will show all installed KeyShot compatible plugins with checkboxes to enable or disable the plugin when KeyShot starts.

Uninstall

Plugins are installed via Windows or Mac OS X installation files and uninstalled through the operating system options.

On this page
• Plugins

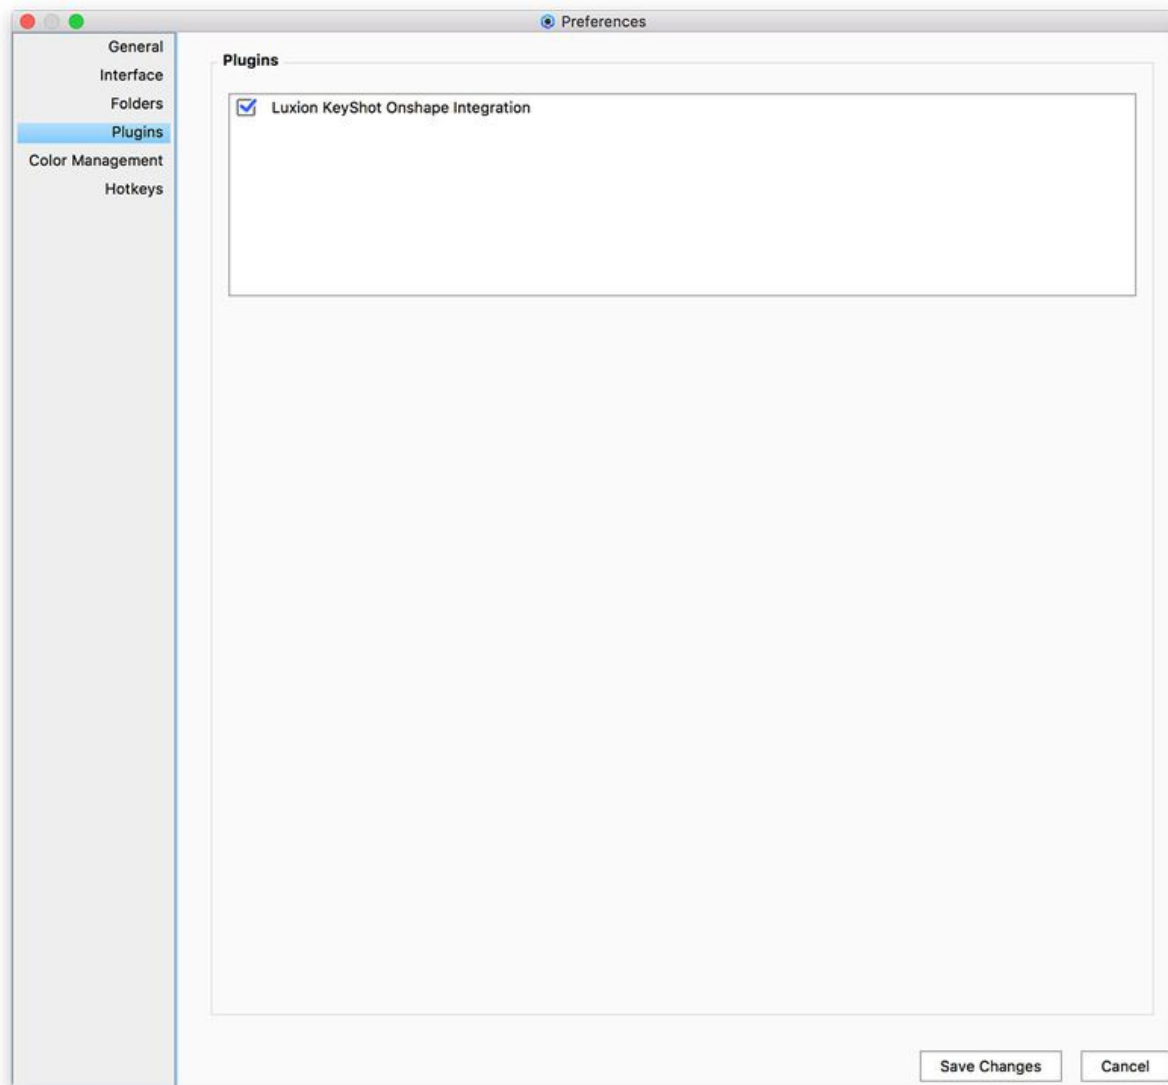

Color Management

Compensate for Image Gamma when applying Library Colors

Gamma corrects color values when applying them to a material directly from the Color Library. This will try to keep the appearance of the color in the Library. With this option selected, the color of the material in the Real-time View and in the Library will always match, if you don't change the Image Gamma after applying the color.

Enable Color Management

Enable this option to use ICC color profile files in KeyShot.

Select the folder icon  to load your desired color profile. Both .ICC and .ICM file formats are supported.

The status window will show if the color profile was loaded and color profile created. Select *Save Changes* to save your color profile settings. To delete the color profile simply remove the file location or disable by unchecking *Enable Color Management*.

If I activate the Adobe RGB (1998) color profile, why does everything looks great in the Real-time View, but different in the final render?

KeyShot uses the sRGB color profile internally.

The color profile set in the Preferences is only applied to the Real-time View to ensure the color output is correct *on your screen*.

It is important to note that the rendering is not done in the Adobe RGB. When the color profile is set in Preferences, the Real-time View output is just translated from sRGB to Adobe RGB to ensure the colors look correct on your screen.

The rendering result will still be in sRGB and is directly saved to the output file as sRGB without applying the color profile.

Since sRGB is a widely used color profile for web applications this is sufficient for most users. And since it's a widely use color profile, most image editing applications are able to translate from sRGB to Adobe RGB for further editing.

Hotkeys Preferences

You can customize all existing hotkeys inside KeyShot. Hotkeys are categorized as *Simple Hotkeys*, *Mouse Actions* and *Camera Controls*. Depending on the type of hotkey you select, either the *Simple Hotkey* or the *Mouse Action* input fields will become active. *Camera Controls* are always active.

Filter/Hotkey List

This allows you to search for a specific *Action/Group* or *Hotkey* in the list. The Hotkey List shows all of the KeyShot commands capable of having a key combination assigned. Actions with empty Hotkey entries do not have a hotkey assigned.

Simple Hotkey

Select a *Simple Hotkey*, i.e. a hotkey that doesn't contain any mouse actions from the list of hotkeys. To edit, simply start typing in the input field. You can always change the hotkey back to its default setting by selecting *Change to Default*.

Mouse Action

Select a *Mouse Action* hotkey from the list, and start modifying the hotkey by changing the mouse action from the pull-down menu, and select up to three modifier keys, i.e. *Alt*, *Shift*, *Ctrl*.

Camera Control

This function allows you to change the camera controls based on your favorite modeling application. In the hotkey list you can see what application has been selected to change the camera controls.

Hotkey Presets

Simply select the 3D modeling software from the dropdown menu, and all camera controls will adjust accordingly. Support is included for:

- *3ds Max*
- *Alias*
- *Alibre*
- *Fusion 360*
- *Maya*
- *NX*
- *PTC Creo*
- *Rhino*
- *Solid Edge*
- *SOLIDWORKS*
- *SpaceClaim*
- *ZBrush*

Import/Export Hotkeys

On this page

- [Filter/Hotkey List](#)
- [Simple Hotkey](#)
- [Mouse Action](#)
- [Camera Control](#)
 - [Hotkey Presets](#)
- [Import/Export Hotkeys](#)
 - [Import...](#)
 - [Export...](#)
- [Reset to Default](#)
 - [Reset selection](#)
 - [Reset All](#)

Import...

You can import your own custom hotkeys file that has been exported from a KeyShot installation previously. KeyShot hotkey file format is .KSH.

Export...

Choose this function to export your custom hotkeys to use on another machine.

Reset to Default

Reset selection

This will reset the hotkey that is currently selected in the HotKey List

Reset All

This will reset all hotkeys to their default settings.

End-User License Agreement

Luxion KeyShot® 8

© 2010 - 2018 Luxion ApS. All Rights Reserved.

Protected by US patents 8,913,065; 9,043,007; 9,183,654.

Copyright law and international treaties protect this computer software program. Unauthorized reproduction or distribution of this software program, or any portion of it, will be prosecuted to the maximum extent possible under law and may result in civil and criminal penalties.

KeyShot®, KeyShotXR™, KeyVR™, and LiveLinking™ are a Trademark or Registered Trademark of Luxion ApS.

PLEASE READ THE FOLLOWING CAREFULLY AS IT AFFECTS YOUR LEGAL RIGHTS:

THE LICENSE GRANT MADE TO YOU PURSUANT TO THIS END-USER LICENSE AGREEMENT (THIS "AGREEMENT") IS CONDITIONED UPON YOUR ACCEPTANCE OF ITS TERMS. IF YOU DO NOT AGREE WITH THIS AGREEMENT'S TERMS, YOU SHOULD RETURN THE SOFTWARE AND ANY DOCUMENTATION, AND YOU WILL RECEIVE A FULL REFUND FOR ANY MONIES PAID FOR THE SOFTWARE.

1. License. The software (the "Software"), no matter how delivered (e.g. as a download online, in CD form), as well as any and all related documentation ("Documents") are licensed to you by Luxion ApS, a Denmark corporation. This License is non-exclusive, with Luxion retaining the right to license the Software and/or Documents to any other party at Luxion's sole discretion. This license is not a sale and except for the license granted below, Luxion retains all right, title and interest in and to the Software and Documents and any copies thereof. The node-locked License allows you to use the Software and Documents on a single fixed personal computer system or on a single mobile computer system (the "Host System"). The floating License allows you to use the Software and Documents within your organization by checking out no more than the number of purchased licenses from a license host. You are also allowed to make one copy of the Software in machine-readable form and one copy of the Documents in hard-copy form for backup purposes only. You must reproduce on any such copy (in whatever form such copy may be) the Luxion copyright notice and any other proprietary legends that are on the original copy of the Software and Documents. Annual maintenance includes all updates and releases for the prepaid year as well as phone-in support.

2. Restrictions. The Software contains copyrighted material, trade secrets, and other proprietary information, and in order to protect them, you may not reverse engineer, disassemble, or otherwise reduce the Software to a human-perceivable form except to the extent that it is unallowable to prohibit such acts under applicable law. You may not modify, network, rent, lease, loan, sell, distribute, or create derivative works based upon the Software or Documents in whole or in part. You may not electronically transfer the Software from one computer to another over a network. In addition, you may not remove, obscure, or alter any proprietary rights or notices affixed or contained in the Software or Documents. All rights not expressly granted are reserved by Luxion.

3. Termination. This License is effective until terminated. You may terminate this License at any time by destroying the Software or Documents and all copies thereof. If you fail to comply with any provision of this License, this License will terminate immediately without notice from Luxion and other legal remedies will become available to Luxion. Upon termination, you must destroy the Software, Documents and all copies thereof.

4. Export Law Assurances. You agree and certify that the Software will not be exported from the jurisdiction in which you acquired it except as permitted by the applicable laws of such jurisdiction.

5. U.S. Government Restricted Rights. The Software and Documents are provided with RESTRICTED RIGHTS. Use, duplication, or disclosure by the U.S. Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 or subparagraphs (c)(1) and (2) of the Commercial Computer Software-Restricted Rights at 48 CFR 52.227-19 and successors thereof, as applicable. Contractor/manufacturer is Luxion ApS.

6. Disclaimer of Warranty on Software. YOU EXPRESSLY ACKNOWLEDGE AND AGREE THAT USE OF THE SOFTWARE IS AT YOUR SOLE RISK. THE SOFTWARE AND DOCUMENTS ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OR CONDITION OF ANY KIND AND LUXION EXPRESSLY DISCLAIMS ALL WARRANTIES AND CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES AND CONDITIONS OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. LUXION DOES NOT WARRANT THAT THE FUNCTIONS CONTAINED IN THE SOFTWARE WILL MEET YOUR REQUIREMENTS, OR THAT THE OPERATION OF THE SOFTWARE WILL BE UNINTERRUPTED OR ERROR-FREE, OR THAT ANY DEFECTS IN THE SOFTWARE WILL BE CORRECTED. FURTHERMORE, LUXION DOES NOT WARRANT OR MAKE ANY REPRESENTATIONS REGARDING THE USE OR THE RESULTS OF THE USE OF THE SOFTWARE OR DOCUMENTS IN TERMS OF THEIR CORRECTNESS, ACCURACY, RELIABILITY, OR OTHERWISE. NO ORAL OR WRITTEN INFORMATION OR ADVICE GIVEN BY LUXION OR AN

AUTHORIZED REPRESENTATIVE THEREOF SHALL CREATE A WARRANTY OR IN ANY WAY INCREASE THE SCOPE OF THIS WARRANTY. SHOULD THE SOFTWARE PROVE DEFECTIVE, YOU (AND NOT LUXION OR ANY AUTHORIZED REPRESENTATIVE) ASSUME THE ENTIRE COST OF ALL NECESSARY SERVICING, REPAIR, OR CORRECTION. SOME STATES AND JURISDICTIONS MAY NOT ALLOW THE EXCLUSION OF IMPLIED WARRANTIES, SO THE ABOVE EXCLUSION MAY NOT APPLY TO YOU.

7. Limitation of Liability. UNDER NO CIRCUMSTANCES, INCLUDING NEGLIGENCE, SHALL LUXION OR ITS SUPPLIERS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL DAMAGES OR RELIANCE THAT RESULT FROM THE USE OF OR INABILITY TO USE THE SOFTWARE OR RELATED DOCUMENTATION, EVEN IF LUXION OR A LUXION AUTHORIZED REPRESENTATIVE HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. THESE LIMITATIONS SHALL APPLY NOTWITHSTANDING THE FAILURE OF ESSENTIAL PURPOSE OF ANY LIMITED REMEDY. SOME STATES AND JURISDICTIONS MAY NOT ALLOW THE LIMITATION OR EXCLUSION OF LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

In no event shall Luxion's total liability to you for all damages, losses, and causes of action (whether in contract, tort (including negligence), or otherwise) exceed the amount paid by you for the Software.

8. Controlling Law and Severability. This license shall be governed by and construed in accordance with the laws of Denmark. If for any reason a court of competent jurisdiction finds any provision of this license, or portion thereof, to be unenforceable, that provision of the license shall be enforced to the maximum extent permissible so as to effect the intent of the parties, and the remainder of this license shall continue in full force and effect.

9. Injunctive Relief. You acknowledge and agree that your obligations and promises of under this Agreement are of a unique, intellectual character that gives them particular value. You acknowledge and agree that a breach of any of the promises or agreements contained in this Agreement will result in irreparable and continuing damage to Luxion for which there will be no adequate remedy at law and, in the event of a breach, Luxion will be entitled to injunctive relief and/or a decree for specific performance, and any other additional relief as may be proper (including monetary damages if appropriate).

10. Assignment. You may not assign any rights or obligations arising under this Agreement without Luxion's prior written consent. Luxion may assign any rights or obligations under this Agreement without your prior written consent. Subject to this restriction on assignment, this Agreement will inure to the benefit of and bind the successors and assigns of each of Luxion and you.

11. Waiver. A waiver of a breach or default under this Agreement will not be a waiver of any other default. Failure by either party to enforce compliance with any term of this Agreement will not be a waiver of that term.

12. Arbitration. The Parties agree that any and all disputes arising out of the terms of this Agreement, their interpretation, and any of the matters herein released shall be subject to binding arbitration, to the extent permitted by law, in Denmark. The Parties agree that the prevailing party in any arbitration shall be entitled to injunctive relief in any court of competent jurisdiction to enforce the arbitration award. The Parties further agree that the prevailing party in any arbitration shall be entitled to reimbursement of their reasonable attorneys' fees and costs incurred in the arbitration. THE UN CONFERENCE ON CONTRACTS FOR THE INTERNATIONAL SALE OF GOODS IS HEREBY EXPRESSLY DISCLAIMED.

13. Entire Agreement: Amendments. This Agreement states the final, complete, and exclusive agreement between the parties with respect to the subject matter and supersedes any previous oral or written communications, representations, understandings, or agreements with respect to that subject matter. Any representations, warranties, or statements made by either party that differ from the terms of this Agreement will be given no force or effect. No course of dealing or usage of trade or course of performance will be relevant to explain or supplement any term expressed in this contract. The terms of this Agreement may be modified only in writing signed by you and an authorized representative of Luxion.